THE DATASHEET OF

TEN 5-4813WI

DC/DC Converters

TEN 5WI Series, 6 Watt

UL 60950-1

Features

- Ultra wide 4:1 input range
- DIP-24 Package with standard pinout
- Full SMD design
- Extended operating temperature range –40°C to +85°C max.
- High efficiency
- Excellent load and line regulation
- Indefinite short circuit protection
- I/O isolation 1500VDC
- Built-in Filter to meet EN 55022, Class A and FCC, level A
- Lead-free design, fully RoHS compliant
- 3-year product warranty

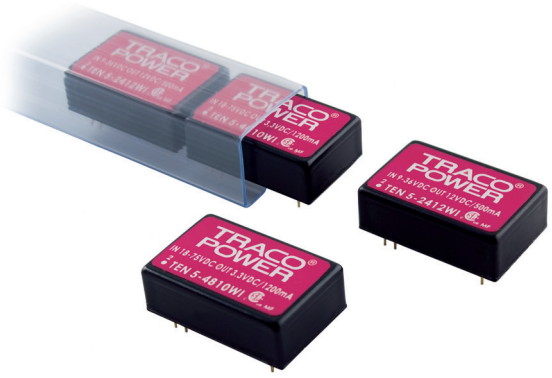

The TEN 5WI series is a family of high performance dc-dc converter modules with 5 W output power, featuring ultra wide input voltage ranges of 9 - 36 VDC or 18 - 75 VDC. They come in a shielded DIP-24 metal package with industry-standard footprint.

A high efficiency allows –40°C to +70°C operation ambient temperatures at full load. Typical applications for these converters are battery operated equipment and distributed power architectures in communication, instrumentation and industrial electronics, everywhere where a wide input voltage range is required.

Models

Ordercode	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TEN 5-2410WI	**9 – 36 VDC** (24 VDC nominal)	3.3 VDC	1200 mA	75 %
TEN 5-2411WI		5 VDC	1000 mA	78 %
TEN 5-2412WI		12 VDC	500 mA	83 %
TEN 5-2413WI		15 VDC	400 mA	82 %
TEN 5-2421WI		±5 VDC	±500 mA	78 %
TEN 5-2422WI		±12 VDC	±250 mA	83 %
TEN 5-2423WI		±15 VDC	±200 mA	82 %
TEN 5-4810WI	**18 – 75 VDC** (48 VDC nominal)	3.3 VDC	1200 mA	75 %
TEN 5-4811WI		5 VDC	1000 mA	78 %
TEN 5-4812WI		12 VDC	500 mA	83 %
TEN 5-4813WI		15 VDC	400 mA	82 %
TEN 5-4821WI		±5 VDC	±500 mA	78 %
TEN 5-4822WI		±12 VDC	±250 mA	83 %
TEN 5-4823WI		±15 VDC	±200 mA	82 %

Input Specifications

Input current no load		24 Vin models 48 Vin models	**20 mA typ.** **10 mA typ.**
Start-up voltage / under voltage shut down		24 Vin models 48 Vin models	**9 VDC / 8.5 VDC typ.** **18 VDC / 16 VDC typ.**
Surge voltage (1 sec. max.)		24 Vin models 48 Vin models	**50 V max.** **100 V max.**
Conducted noise (input)			**EN 55022 level A, FCC part 15, level A**

Output Specifications

Voltage set accuracy			**±2.0 % max.**
Regulation	– Input variation Vin min. to Vin max. – Load variation 10 – 100 %		**±0.5 % max.**
		single output models	**1.0 % max.**
		dual output models	**1.0 % max.** balanced load
		25 – 100 %	**5.0 % max.** unbalanced load
Ripple and noise (20 MHz Bandwidth)			**80 mVpk-pk max**
Temperature coefficient			**±0.02 %/K**
Current limitation			**>110 % of Iout max., constant current**
Short circuit protection			**indefinite (automatic recovery)**
Capacitive load		3.3 / 5 VDC models 12 / 15 VDC models dual output models	**470 µF max.** **100 µF max.** **100 µF max.**

General Specifications

Temperature ranges	– Operating – Case temperature – Storage	**–40°C to +85°C** **+100°C max.** **–40°C to +125°C**
Derating		**3.5 %/K above +70°C**
Humidity (non condensing)		**95 % rel H max.**
Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)		**>800'000 h**
Isolation voltage (60 sec.)	– Input/Output	**1'500 VDC**
Isolation capacitance	– Input/Output	**1000 pF typ**
Isolation resistance	– Input/Output (500 VDC)	**>1'000 M Ohm**
Switching frequency		**290 - 450 kHz** (PFM)
Safety standards		**cUL/UL 60950-1 , IEC/EN 60950-1**
Environmental compliance	– Reach – RoHS	www.tracopower.com/info/reach-declaration.pdf directive 2011/65/EU

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Physical Specifications

Casing material	black anodized aluminium
Baseplate material	non conductive FR4
Potting material	epoxy (UL 94V-0 rated)
Weight	17 g (0.49 oz)
Soldering temperature	max. 260°C / 10 sec.

Supporting documents: www.tracopower.com/overview/ten5wi

Outline Dimensions

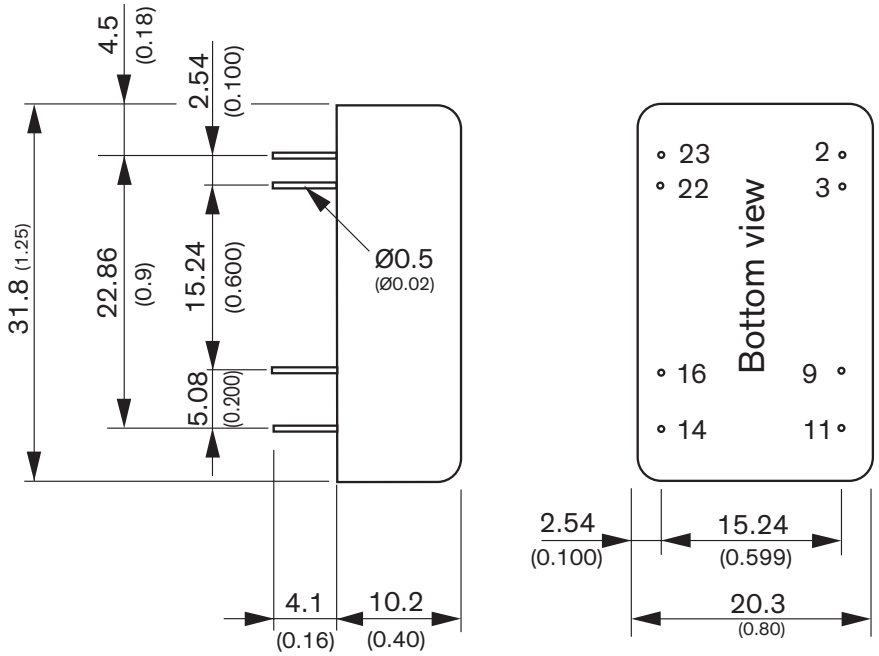

All dimension in mm (inch)
Tolerances: x.x ±0.25 (x.xx ±0.01)
x.xx ±0.13 (x.xxx ±0.005)
Pin diameter tolerances: x.x ±0.05 (x.xx ±0.002)

Pin-Out

Pin	Single	Dual
2	–Vin (GND)	–Vin (GND)
3	–Vin (GND)	–Vin (GND)
9	No pin	Common
11	NC	–Vout
14	+Vout	+Vout
16	–Vout	Common
22	+Vin (Vcc)	+Vin (Vcc)
23	+Vin (Vcc)	+Vin (Vcc)

NC = Not connected

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View TEN 5-4813WI on WIN SOURCE
- Traco Power Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management