THE DATASHEET OF

TRN 3-1213SM

TRACO POWER

DC/DC Converter

TRN 3SM Series, 3 Watt

- **Compact SMD package 11,9 x 11,3 x 8,0 mm**
- **Fully regulated outputs**
- **Input Voltage range 4.5-13.2, 9-18, 18-36, 36-75 VDC**
- **I/O-isolation 1‘600 VDC**
- **Operating temperature range −40°C to +85°C**
- **Short circuit protection**
- **Designed to meet IEC/EN/UL 62368-1 (not certified)**
- **3-year product warranty**



The TRN 3SM Series comprises 3 Watt fully regulated, high performance DC/DC converters. They come in a compact cubical package of only 1.07 cm³. Full load operation is reliable up tp 65°C environment temperature. With 1’600 VDC I/O-isolation voltage, and short current protection they cover a wide range of application when space is limited. The input of the converters is designed for a wide voltage range (2:1) and minimum load is not required. The functional I/O-isolation system is designed to meet IEC/EN/UL 62368-1 (not certified) with a test voltage (60 s) of 1600 VDC.

Models

Order Code	Input Voltage Range	Output 1		Output 2		Efficiency
		Vnom	Imax	Vnom	Imax	typ.
TRN 3-0510SM	4.5 - 13.2 VDC (9 VDC nom.)	3.3 VDC	700 mA			75 %
TRN 3-0511SM		5 VDC	600 mA			78 %
TRN 3-0512SM		12 VDC	250 mA			82 %
TRN 3-0513SM		15 VDC	200 mA			80 %
TRN 3-0515SM		24 VDC	125 mA			80 %
TRN 3-0521SM		+5 VDC	300 mA	−5 VDC	300 mA	77 %
TRN 3-0522SM		+12 VDC	125 mA	−12 VDC	125 mA	80 %
TRN 3-0523SM		+15 VDC	100 mA	−15 VDC	100 mA	80 %
TRN 3-1210SM	9 - 18 VDC (12 VDC nom.)	3.3 VDC	700 mA			76 %
TRN 3-1211SM		5 VDC	600 mA			79 %
TRN 3-1212SM		12 VDC	250 mA			84 %
TRN 3-1213SM		15 VDC	200 mA			83 %
TRN 3-1215SM		24 VDC	125 mA			82 %
TRN 3-1221SM		+5 VDC	300 mA	−5 VDC	300 mA	78 %
TRN 3-1222SM		+12 VDC	125 mA	−12 VDC	125 mA	82 %
TRN 3-1223SM		+15 VDC	100 mA	−15 VDC	100 mA	81 %
TRN 3-2410SM	18 - 36 VDC (24 VDC nom.)	3.3 VDC	700 mA			76 %
TRN 3-2411SM		5 VDC	600 mA			78 %
TRN 3-2412SM		12 VDC	250 mA			84 %
TRN 3-2413SM		15 VDC	200 mA			84 %
TRN 3-2415SM		24 VDC	125 mA			83 %
TRN 3-2421SM		+5 VDC	300 mA	−5 VDC	300 mA	79 %
TRN 3-2422SM		+12 VDC	125 mA	−12 VDC	125 mA	83 %
TRN 3-2423SM		+15 VDC	100 mA	−15 VDC	100 mA	82 %
TRN 3-4810SM	36 - 75 VDC (48 VDC nom.)	3.3 VDC	700 mA			75 %
TRN 3-4811SM		5 VDC	600 mA			79 %
TRN 3-4812SM		12 VDC	250 mA			83 %
TRN 3-4813SM		15 VDC	200 mA			83 %
TRN 3-4815SM		24 VDC	125 mA			82 %
TRN 3-4821SM		+5 VDC	300 mA	−5 VDC	300 mA	77 %
TRN 3-4822SM		+12 VDC	125 mA	−12 VDC	125 mA	82 %
TRN 3-4823SM		+15 VDC	100 mA	−15 VDC	100 mA	80 %

Input Specifications

Input Current	- At no load	9 Vin models:	75 mA typ.
		12 Vin models:	40 mA typ.
		24 Vin models:	20 mA typ.
		48 Vin models:	12 mA typ.
Surge Voltage		9 Vin models:	15 VDC max. (1 s max.)
		12 Vin models:	25 VDC max. (1 s max.)
		24 Vin models:	50 VDC max. (1 s max.)
		48 Vin models:	100 VDC max. (1 s max.)
Reflected Ripple Current		9 Vin models:	100 mAp-p typ.
		12 Vin models:	75 mAp-p typ.
		24 Vin models:	75 mAp-p typ.
		48 Vin models:	50 mAp-p typ.
Recommended Input Fuse		9 Vin models:	1'600 mA (slow blow)
		12 Vin models:	800 mA (slow blow)
		24 Vin models:	500 mA (slow blow)
		48 Vin models:	315 mA (slow blow)
			(The need of an external fuse has to be assessed in the final application.)
Input Filter			Internal Capacitor

Output Specifications

Voltage Set Accuracy			±1% max.
Regulation	- Input Variation (Vmin - Vmax)	single output models:	0.2% max.
		dual output models:	0.2% max.
	- Load Variation (0 - 100%)	single output models:	1% max.
		dual output models:	1% max. (Output 1)
			1% max. (Output 2)
	- Cross Regulation (25% / 100% asym. load)	dual output models:	5% max.
Ripple and Noise	- 20 MHz Bandwidth		50 mVp-p typ.
Capacitive Load	- single output	3.3 Vout models:	4'400 µF max.
		5 Vout models:	2'200 µF max.
		12 Vout models:	1'000 µF max.
		15 Vout models:	820 µF max.
		24 Vout models:	330 µF max.
	- dual output	5 / -5 Vout models:	1'200 / 1'200 µF max.
		12 / -12 Vout models:	520 / 520 µF max.
		15 / -15 Vout models:	440 / 440 µF max.
Minimum Load			Not required
Temperature Coefficient			±0.02 %/K max.
Start-up Time			5 ms typ. / 15 ms max.
Short Circuit Protection			Continuous, Automatic recovery
Output Current Limitation			180% typ. of Iout max.
Transient Response	- Response Deviation		3% typ. (25% Load Step)
	- Response Time		500 µs typ. (25% Load Step)

Safety Specifications

Standards	- IT / Multimedia Equipment	Designed for IEC/EN/UL 62368-1 (not certified)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

EMC Specifications

EMI Emissions	- Conducted Emissions		EN 55032 class A (with external filter)
			EN 55032 class B (with external filter)
	- Radiated Emissions		EN 55032 class A (with external filter)
			EN 55032 class B (with external filter)
		External filter proposal:	www.tracopower.com/overview/trn3sm
EMS Immunity			EN 55024 (IT Equipment)
			EN 55035 (Multimedia)
	- Electrostatic Discharge	Air:	EN 61000-4-2, ±8 kV, perf. criteria A
		Contact:	EN 61000-4-2, ±6 kV, perf. criteria A
	- RF Electromagnetic Field		EN 61000-4-3, 10 V/m, perf. criteria A
	- EFT (Burst) / Surge		EN 61000-4-4, ±2 kV, perf. criteria A
			EN 61000-4-5, ±1 kV, perf. criteria A
		Ext. input component:	Nippon chemi-con KY 220 µF/ 100 V
	- Conducted RF Disturbances		EN 61000-4-6, 10 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous:	EN 61000-4-8, 100 A/m, perf. criteria A
		1 s:	EN 61000-4-8, 1000 A/m, perf. criteria A

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	–40°C to +85°C
	- Case Temperature	+105°C max.
	- Storage Temperature	–55°C to +125°C
Power Derating	- High Temperature	2.5 %/K above 65°C
	See application note:	www.tracopower.com/overview/trn3sm
Cooling System		Natural convection (20 LFM)
Regulator Topology		RCC Converter
Switching Frequency		100 kHz min. (PFM)
Insulation System		Functional Insulation
Isolation Test Voltage	- Input to Output, 60 s	1'600 VDC
Isolation Resistance	- Input to Output, 500 VDC	1'000 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	75 pF max.
Reliability	- Calculated MTBF	4'400'000 h (MIL-HDBK-217F, ground benign)
Moisture Sensitivity (MSL)		Level 2 (J-STD-033C)
Washing Process		According to Cleaning Guideline www.tracopower.com/info/cleaning.pdf
Environment	- Vibration	MIL-STD-810F
	- Thermal Shock	MIL-STD-810F
Housing Material		Non-conductive Plastic (UL 94 V-0 rated)
Potting Material		Epoxy (UL 94 V-0 rated)
Pin Material		Copper
Pin Foundation Plating		Nickel (0.3 - 0.9 µm)
Pin Surface Plating		Tin (5 - 6 µm), matte
Housing Type		Plastic Case
Mounting Type		PCB Mount
Connection Type		SMD (Surface-Mount Device)
Footprint Type		SMD10
Soldering Profile		Lead-Free Reflow Soldering (acc. J-STD-020E) 245°C max. (Tp) 30 s max. (tp, at Tp - 5°C) 90 s max. (tL, time above 217°C) See application note: www.tracopower.com/info/reflow-soldering.pdf
Weight		2.1 g

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Environmental Compliance	- REACH Declaration	www.tracopower.com/info/reach-declaration.pdf
		REACH SVHC list compliant
		REACH Annex XVII compliant
	- RoHS Declaration	www.tracopower.com/info/rohs-declaration.pdf
		Exemptions: 7a, 7c-I
		(RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).)
	- SCIP Reference Number	17b2d50b-cbe6-4fa7-b44e-fe47757c2464

Supporting Documents

Overview Link (for additional Documents)	www.tracopower.com/overview/trn3sm

Outline Dimensions

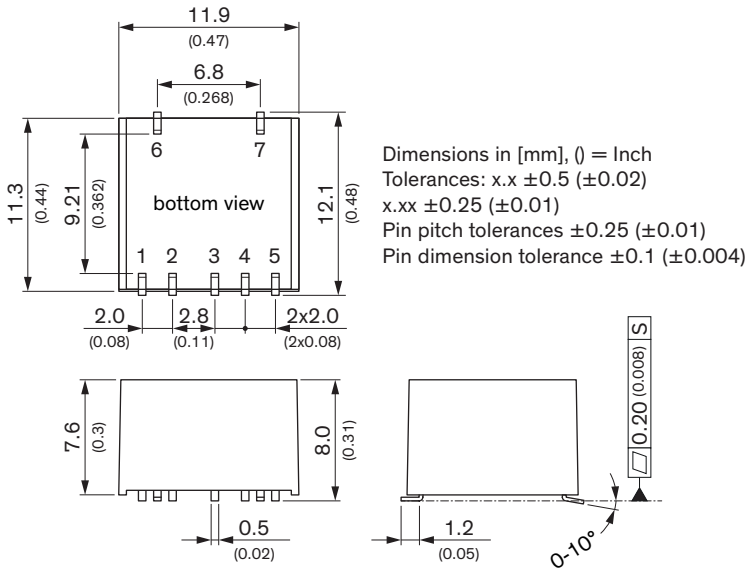

Dimensions in [mm], () = Inch
Tolerances: x.x ±0.5 (±0.02)
x.xx ±0.25 (±0.01)
Pin pitch tolerances ±0.25 (±0.01)
Pin dimension tolerance ±0.1 (±0.004)

Pinout		
Pin	**Single**	**Dual**
1	–Vin (GND)	–Vin (GND)
2	+Vin (Vcc)	+Vin (Vcc)
3	+Vout	+Vout
4	No pin	Common
5	–Vout	–Vout
6	NC	NC
7	NC	NC

NC: Not connected

Recommended Solder Pad Layout

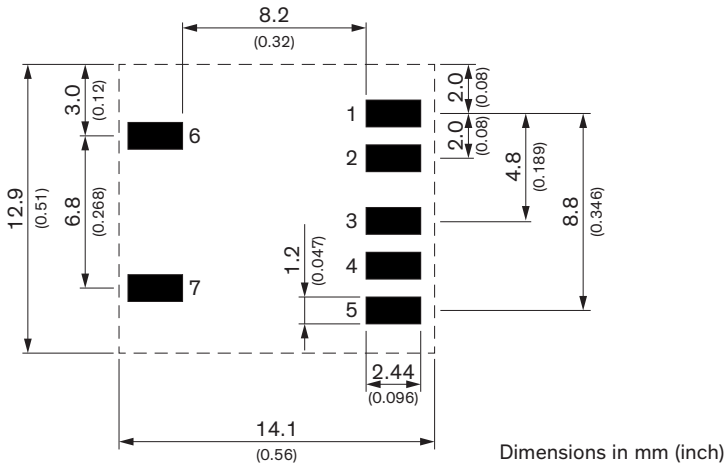

Dimensions in mm (inch)

© Copyright 2024 Traco Electronic AG

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View TRN 3-1213SM on WIN SOURCE
- Traco Power Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management