



**THE DATASHEET OF  
TXM 050-105**



- Very compact metal cased power supplies
- High operating temperature up to 70°C
- Low no load power consumption <0.5W
- Screw terminal block
- No internal fan
- Universal AC input
- Withstand 300 VAC surge input for 5 sec.
- Adjustable output voltage
- 3-year product warranty



The TXM 050 series of 50 Watt is a family of enclosed AC/DC power supplies designed for cost critical applications. With a low profile metal case and screw terminal block connections, they are easy to install in any equipment. There are five models of single output voltages from 5 VDC to 48 VDC. These power supplies have universal input and comply with European EMC standards and the Low Voltage Directive (LVD).

Models				
Order Code	Output Power (max.)	Output Voltage (adjustable)	Output Current (max.)	Efficiency (typ.)
TXM 050-105	50 Watt	5 VDC	8.0 A	80 %
TXM 050-112		12 VDC	4.2 A	85 %
TXM 050-115		15 VDC	3.4 A	86 %
TXM 050-124		24 VDC	2.2 A	88 %
TXM 050-148		48 VDC	1.1 A	89 %

### Input Specifications

Input voltage range	– AC range (universal input) – DC range	88 – 264 VAC (47 – 63 Hz) 127 – 370 VDC
Input current at full load		1.3 A max.
Surge voltage (5 s max.)		300 VAC
Inrush current	– at 230 VAC	45 A typ.
Zero load power consumption		0.5 W max.
Leakage current	– Input to Output – Input to PE	0.25 mA max. 3.50 mA max.

### Output Specifications

Voltage set accuracy		±3 % max.
Voltage adjustment range		–5 % to +10 %
Regulation	– Input variation (Vin min. to Vin max.) – Load variation (0 - 100%)	0.5 % max. 1.0 % max.
Minimum load		not required
Temperature coefficient		±0.03 %/K max.
Hold-up time	– at 230 VAC	50 ms min.
Start-up time	– at 230 VAC	1.5 s max.
Startup overshoot voltage		5 % max.
Ripple and noise (20 MHz Bandwidth)	5 Vout model: 12 & 15 Vout model: 24 & 48 Vout model:	80 mVp-p max. 120 mVp-p max. 200 mVp-p max.
Output current limitation		105 – 150 % of Iout
Short circuit protection	5 Vout model: other output models:	continuous, automatic recovery (hiccup mode) continuous, automatic recovery (constant current)
Over voltage protection		115 – 150 % of Vout (constant voltage)


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

## General Specifications

Temperature ranges	<ul style="list-style-type: none"> <li>– Operating</li> <li>– Storage</li> </ul>	–25°C to +70°C (with derating) –40°C to +85°C
Humidity (non condensing)	<ul style="list-style-type: none"> <li>– Operating</li> <li>– Storage</li> </ul>	20 – 90 % rel. H 10 – 95 % rel. H
Derating	<ul style="list-style-type: none"> <li>– Temperature</li> <li>– Low input voltage</li> </ul>	5 Vout model: 1.5 %/K above 50°C other output models: 1.0 %/K above 50°C 0.8 %/V below 115 VAC
Altitude during operation		5000 m max.
Isolation voltage	<ul style="list-style-type: none"> <li>– Input to output (60 s)</li> <li>– Input to case (60 s)</li> <li>– Output to case (60 s)</li> </ul>	3000 VAC 1500 VAC 500 VAC
Isolation resistance		100 MOhm min.
Reliability	– Calculated MTBF at +25°C acc. to MIL-HDBK-217F	200'000 h
Protection class		class I
EMC emissions	<ul style="list-style-type: none"> <li>– Conducted and radiated input emission</li> <li>– Flicker</li> </ul>	EN 55032, class B EN 61000-3-3
EMC immunity	<ul style="list-style-type: none"> <li>– Electrostatic discharge (ESD)</li> <li>– Radiated immunity</li> <li>– Fast transiente</li> <li>– Surge</li> <li>– Conducted immunity</li> <li>– Magnetic field immunity</li> <li>– Voltage dips and interruptions</li> </ul>	EN 55024 EN 61000-4-2, ±4 kV air, ±8 kV contact perf. criteria A EN 61000-4-3, 3 V/m perf. criteria A EN 61000-4-4, ±1 kV perf. criteria A EN 61000-4-5, ±1 kV line to line, ±2kV line to ground, perf. criteria B EN 61000-4-6, 3 Vrms perf. criteria A EN 61000-4-8, 1 A/m perf. criteria A EN 61000-4-11 >95%, 0.5 cycle, perf. criteria A 30%, 25 cycle, perf. criteria A >95%, 250 cycle, perf. criteria C
Safety standards and certification	<ul style="list-style-type: none"> <li>– Certification documents</li> </ul>	IEC/EN/UL 60950-1 <a href="http://www.tracopower.com/overview/txm050">www.tracopower.com/overview/txm050</a>
Environmental compliance	<ul style="list-style-type: none"> <li>– Reach</li> <li>– RoHS</li> </ul>	<a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a> RoHS directive 2011/65/EU
Connection		Screw terminal

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### Dimension

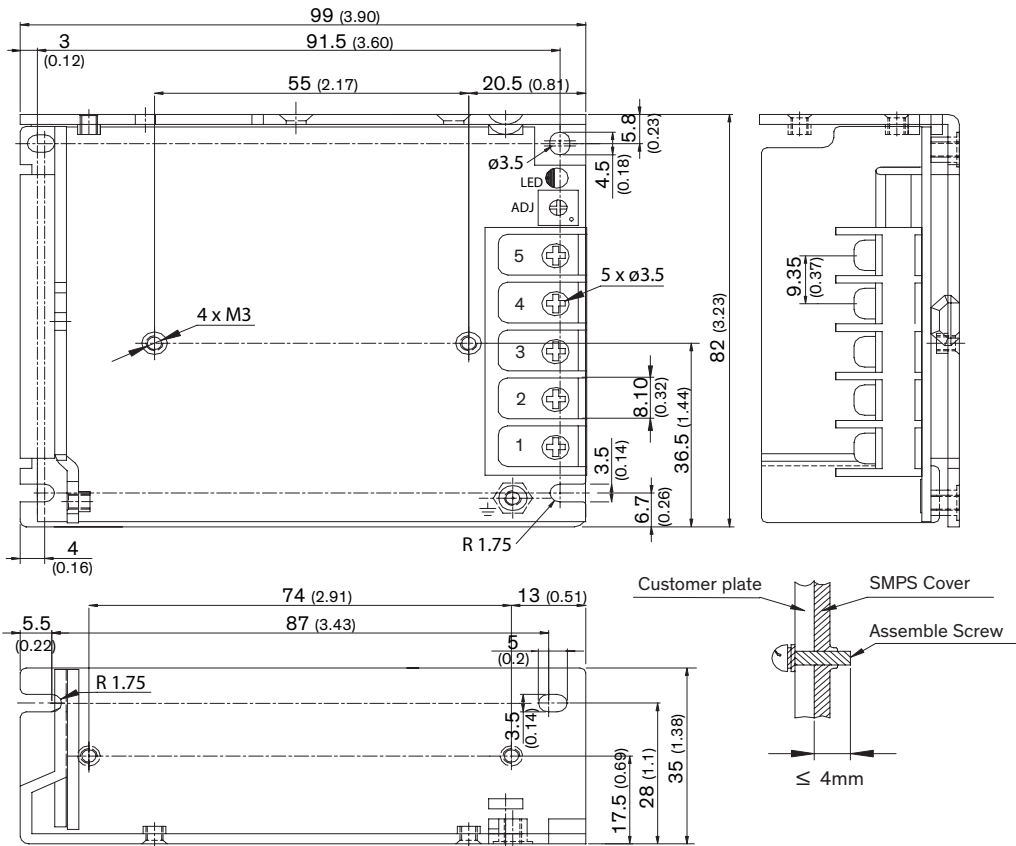



Pin-Out	
Pin	Function
1	AC (N)
2	AC (L)
3	PE
4	- Vout
5	+ Vout

**Weight:** 260 g (9.17 oz)

Dimensions in mm, ( ) = inch  
Outside dimension tolerance:  $\pm 1.0$  mm

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View TXM 050-105 on WIN SOURCE](#)
-  [Traco Power Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management