THE DATASHEET OF

UJ4SC075011K4S

www.win-source.net 0086-755-83957316

750V-11mΩ SiC FET

Rev. B, July 2021

DATASHEET

UJ4SC075011K4S

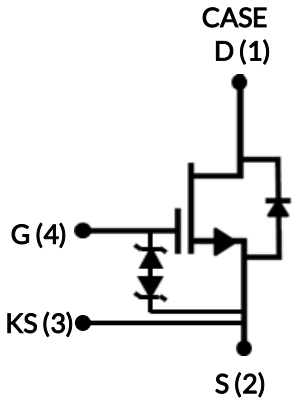

Part Number	Package	Marking
UJ4SC075011K4S	TO-247-4L	UJ4SC075011K4S

RoHS COMPLIANT | Pb LEAD FREE | HF HALOGEN FREE

Description

The UJ4SC075011K4S is a 750V, 11mΩ G4 SiC FET. It is based on a unique 'cascode' circuit configuration, in which a normally-on SiC JFET is co-packaged with a Si MOSFET to produce a normally-off SiC FET device. The device's standard gate-drive characteristics allows for a true "drop-in replacement" to Si IGBTs, Si FETs, SiC MOSFETs or Si superjunction devices. Available in the TO-247-4L package, this device exhibits ultra-low gate charge and exceptional reverse recovery characteristics, making it ideal for switching inductive loads and any application requiring standard gate drive.

Features

- On-resistance $R_{DS(on)}$: 11mΩ (typ)
- Operating temperature: 175°C (max)
- Excellent reverse recovery: Q_{rr} = 288nC
- Low body diode V_{FSD}: 1.1V
- Low gate charge: Q_G =75nC
- Threshold voltage $V_{G(th)}$: 4.5V (typ) allowing 0 to 15V drive
- Low intrinsic capacitance
- ESD protected, HBM class 2
- TO-247-4L package for faster switching, clean gate waveforms

Typical applications

- EV charging
- PV inverters
- Switch mode power supplies
- Power factor correction modules
- Motor drives
- Induction heating

Maximum Ratings

Parameter	Symbol	Test Conditions	Value	Units
Drain-source voltage	V_{DS}		750	V
Gate-source voltage	V_{GS}	DC	-20 to +20	V
		AC (f > 1Hz)	-25 to +25	V
Continuous drain current [1]	I_D	T_C = 25°C	104	A
		T_C = 100°C	75	A
Pulsed drain current [2]	I_{DM}	T_C = 25°C	300	A
Single pulsed avalanche energy [3]	E_{AS}	L=15mH, I_{AS} = 4.5A	151	mJ
SiC FET dv/dt ruggedness	dv/dt	$V_{DS} \leq$ 500V	100	V/ns
Power dissipation	P_{tot}	T_C = 25°C	357	W
Maximum junction temperature	$T_{J,max}$		175	°C
Operating and storage temperature	T_J, T_{STG}		-55 to 175	°C
Max. lead temperature for soldering, 1/8" from case for 5 seconds	T_L		250	°C

1. Limited by $T_{J,max}$
2. Pulse width t_p limited by $T_{J,max}$
3. Starting T_J = 25°C
4. Short circuit current is independent of the gate voltage V_{GS}>12V

Thermal Characteristics

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Thermal resistance, junction-to-case	$R_{\theta JC}$			0.33	0.42	°C/W

Electrical Characteristics (T_J = +25°C unless otherwise specified)

Typical Performance - Static

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Drain-source breakdown voltage	BV_{DS}	V_{GS}=0V, I_D=1mA	750			V
Total drain leakage current	I_{DSS}	V_{DS}=750V, V_{GS}=0V, T_J=25°C		3.5	60	µA
		V_{DS}=750V, V_{GS}=0V, T_J=175°C		45		
Total gate leakage current	I_{GSS}	V_{DS}=0V, T_J=25°C, V_{GS}=-20V / +20V		2	± 20	µA
Drain-source on-resistance	$R_{DS(on)}$	V_{GS}=12V, I_D=60A, T_J=25°C		11	14.2	mΩ
		V_{GS}=12V, I_D=60A, T_J=125°C		18.4		
		V_{GS}=12V, I_D=60A, T_J=175°C		24.2		
Gate threshold voltage	$V_{G(th)}$	V_{DS}=5V, I_D=10mA	3.5	4.5	5.5	V
Gate resistance	R_G	f=1MHz, open drain		2.3		Ω

Typical Performance - Reverse Diode

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Diode continuous forward current [1]	I_S	T_C=25°C			104	A
Diode pulse current [2]	$I_{S,pulse}$	T_C=25°C			300	A
Forward voltage	V_{FSD}	V_{GS}=0V, I_F=30A, T_J=25°C		1.1	1.24	V
		V_{GS}=0V, I_F=30A, T_J=175°C		1.2		
Reverse recovery charge	Q_{rr}	V_R=400V, I_F=60A, V_{GS}=0V, R_{G_EXT}=5Ω di/dt=2500A/µs, T_J=25°C		288		nC
Reverse recovery time	t_{rr}			26		ns
Reverse recovery charge	Q_{rr}	V_R=400V, I_F=60A, V_{GS}=0V, R_{G_EXT}=5Ω di/dt=2500A/µs, T_J=150°C		292		nC
Reverse recovery time	t_{rr}			26		ns

Typical Performance - Dynamic

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Input capacitance	C_{iss}	V_{DS}=400V, V_{GS}=0V f=100kHz		3245		pF
Output capacitance	C_{oss}			178		
Reverse transfer capacitance	C_{rss}			1.2		
Effective output capacitance, energy related	$C_{oss(er)}$	V_{DS}=0V to 400V, V_{GS}=0V		225		pF
Effective output capacitance, time related	$C_{oss(tr)}$	V_{DS}=0V to 400V, V_{GS}=0V		470		pF
C_{OSS} stored energy	E_{oss}	V_{DS}=400V, V_{GS}=0V		18		µJ
Total gate charge	Q_G	V_{DS}=400V, I_D=60A, V_{GS} = -0V to 15V		75		nC
Gate-drain charge	Q_{GD}			13		
Gate-source charge	Q_{GS}			22		
Turn-on delay time	$t_{d(on)}$	Notes 5 and 6, V_{DS}=400V, I_D=60A, Gate Driver =0V to +15V, Turn-on $R_{G,EXT}$=1Ω, Turn-off $R_{G,EXT}$=5Ω, inductive Load, FWD: same device with V_{GS} = 0V and R_G = 5Ω, RC snubber: R_S=10Ω and C_S=400pF, T_J=25°C		19		ns
Rise time	t_r			26		
Turn-off delay time	$t_{d(off)}$			65		
Fall time	t_f			9		
Turn-on energy including R_S energy	E_{ON}			257		µJ
Turn-off energy including R_S energy	E_{OFF}			107		
Total switching energy	E_{TOTAL}			364		
Snubber R_S energy during turn-on	E_{RS_ON}			8		
Snubber R_S energy during turn-off	E_{RS_OFF}			21		
Turn-on delay time	$t_{d(on)}$	Notes 5 and 6, V_{DS}=400V, I_D=60A, Gate Driver =0V to +15V, Turn-on $R_{G,EXT}$=1Ω, Turn-off $R_{G,EXT}$=5Ω, inductive Load, FWD: same device with V_{GS} = 0V and R_G = 5Ω, RC snubber: R_S=10Ω and C_S=400pF, T_J=150°C		19		ns
Rise time	t_r			28		
Turn-off delay time	$t_{d(off)}$			73		
Fall time	t_f			9		
Turn-on energy including R_S energy	E_{ON}			320		µJ
Turn-off energy including R_S energy	E_{OFF}			125		
Total switching energy	E_{TOTAL}			445		
Snubber R_S energy during turn-on	E_{RS_ON}			8		
Snubber R_S energy during turn-off	E_{RS_OFF}			19		

5. Measured with the switching test circuit in Figure 29.
6. In this datasheet, all the switching energies (turn-on energy, turn-off energy and total energy) presented in the tables and Figures include the device RC snubber energy losses.

Typical Performance Diagrams

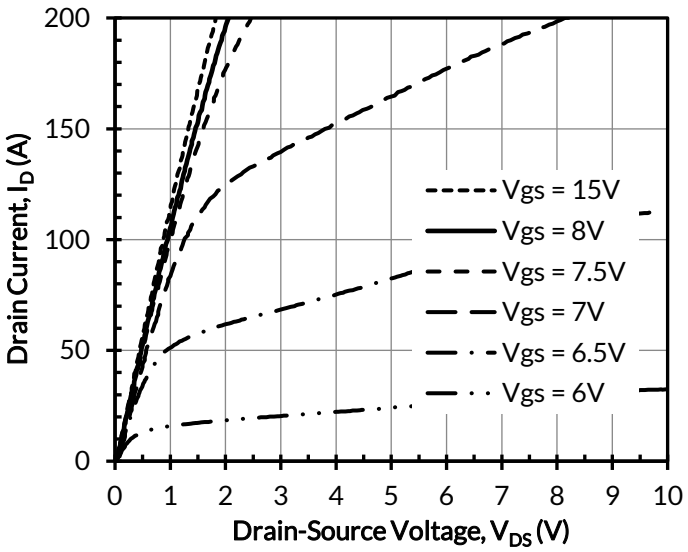

Figure 1. Typical output characteristics at T_J = - 55°C, tp < 250µs

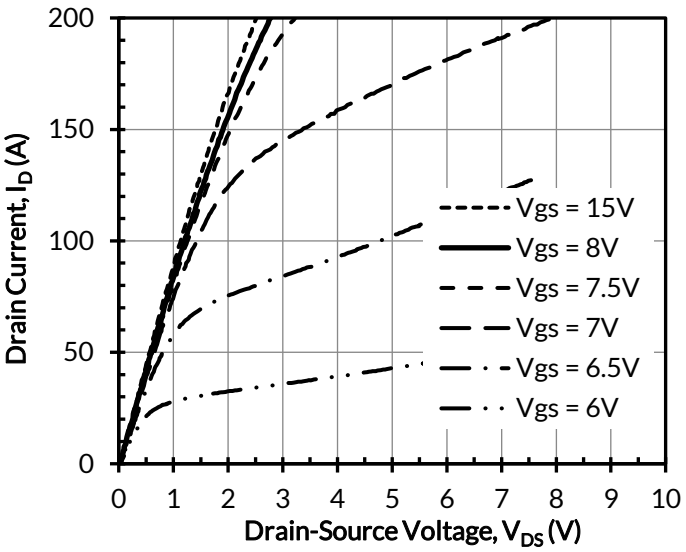

Figure 2. Typical output characteristics at T_J = 25°C, tp < 250µs

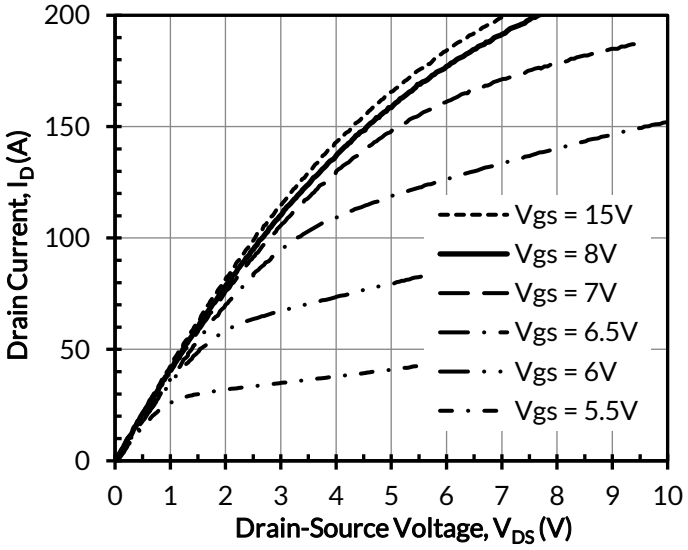

Figure 3. Typical output characteristics at T_J = 175°C, tp < 250µs

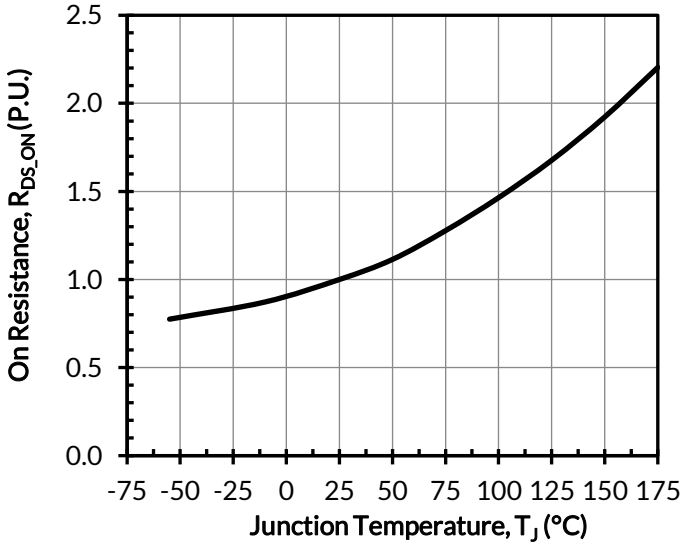

Figure 4. Normalized on-resistance vs. temperature at V_{GS} = 12V and I_D = 60A

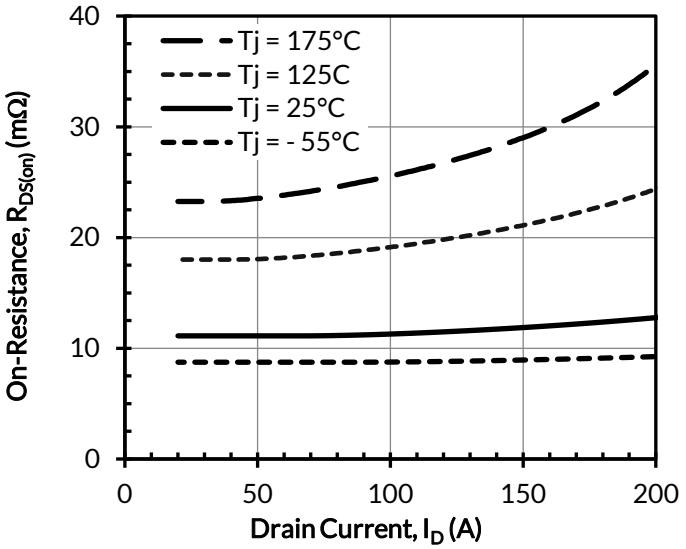

Figure 5. Typical drain-source on-resistances at V_{GS} = 12V

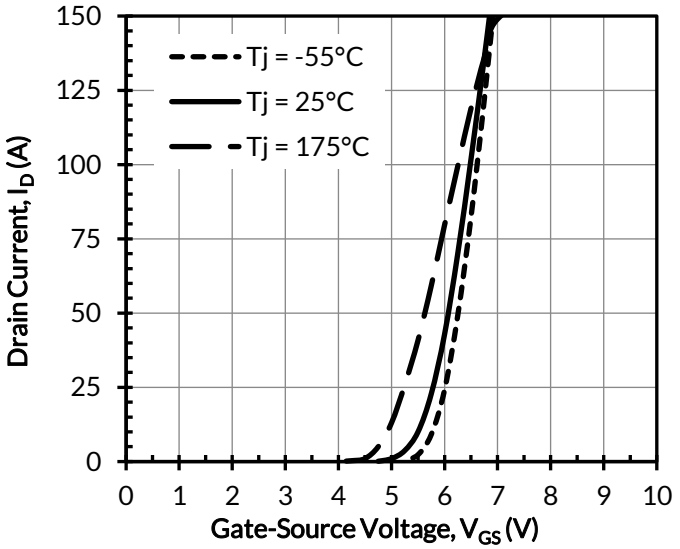

Figure 6. Typical transfer characteristics at V_{DS} = 5V

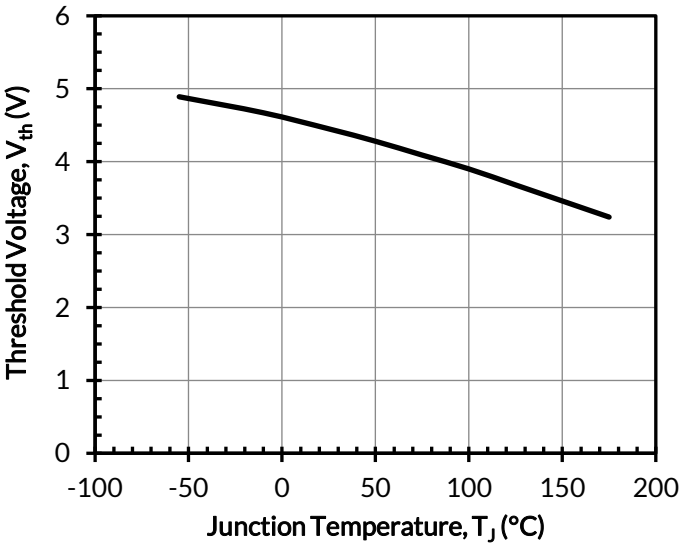

Figure 7. Threshold voltage vs. junction temperature at V_{DS} = 5V and I_D = 10mA

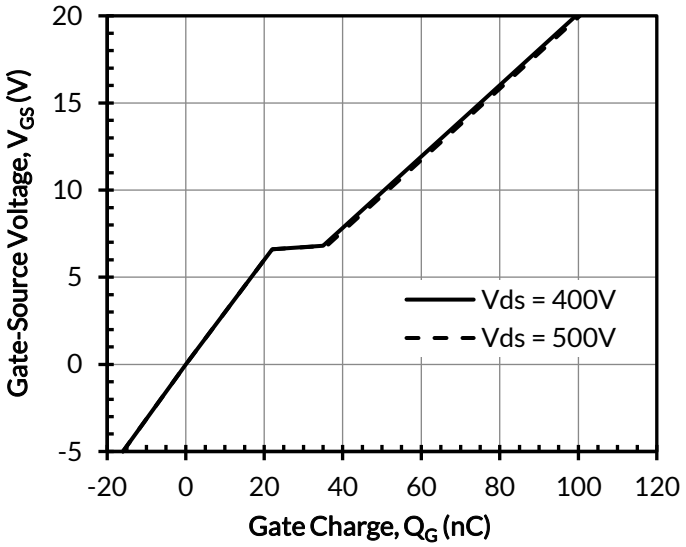

Figure 8. Typical gate charge at I_D = 60A

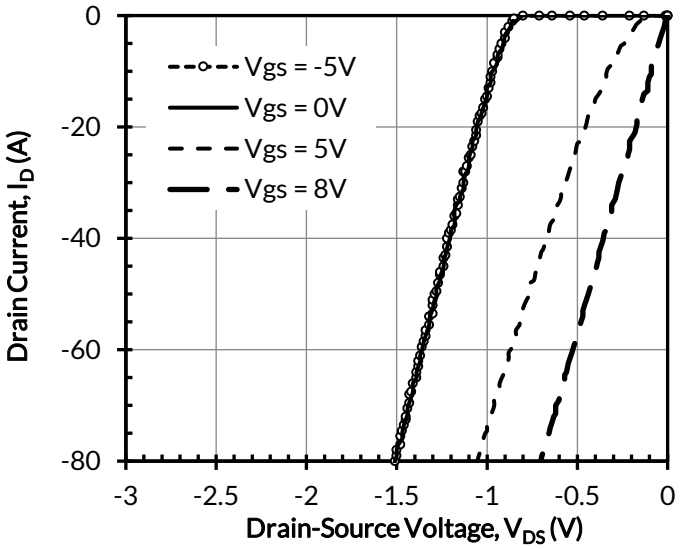

Figure 9. 3rd quadrant characteristics at T_J = -55°C

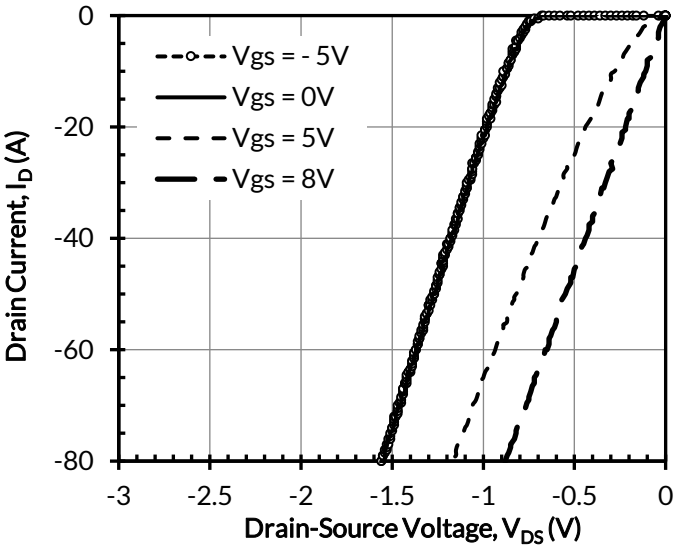

Figure 10. 3rd quadrant characteristics at T_J = 25°C

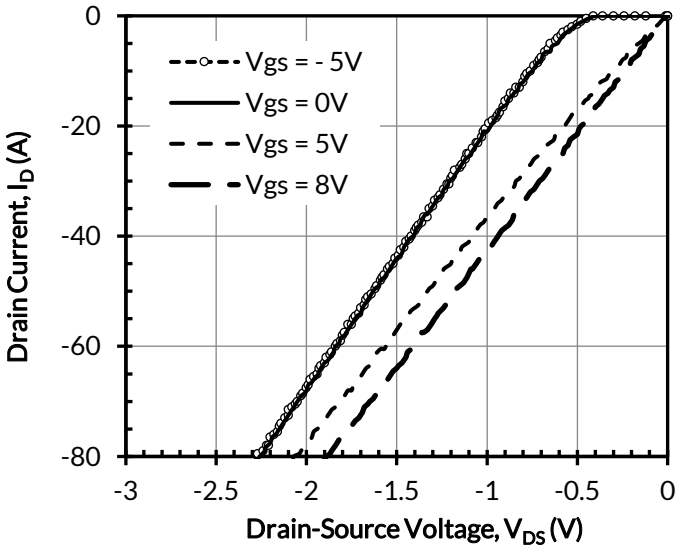

Figure 11. 3rd quadrant characteristics at T_J = 175°C

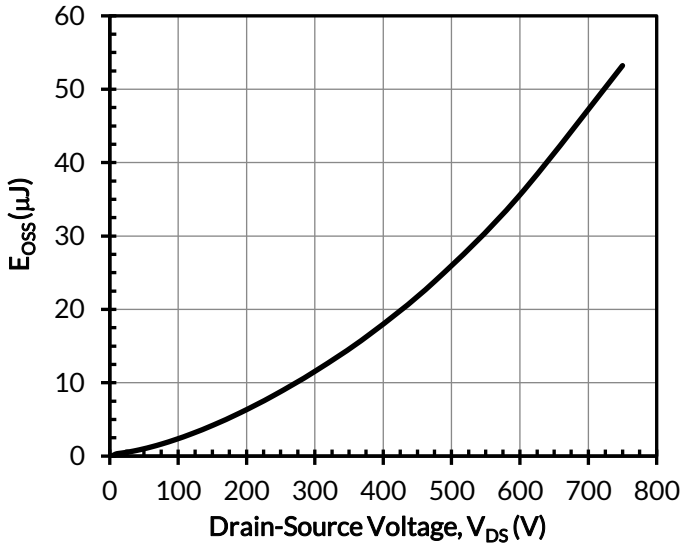

Figure 12. Typical stored energy in C_{OSS} at V_{GS} = 0V

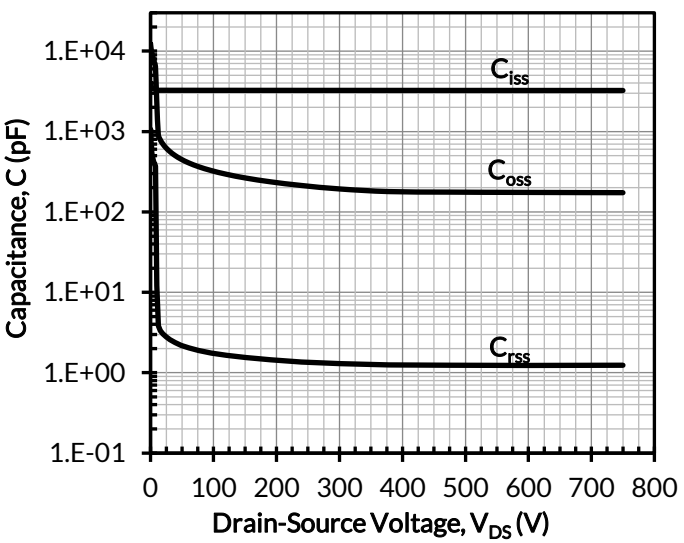

Figure 13. Typical capacitances at f = 100kHz and V_{GS} = 0V

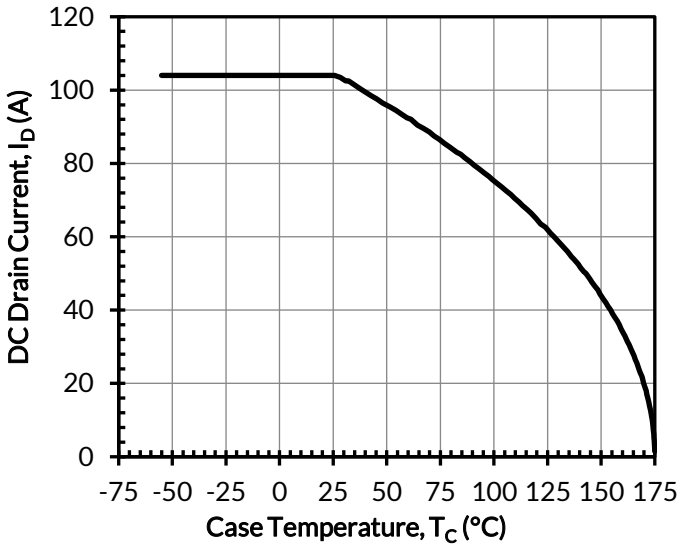

Figure 14. DC drain current derating

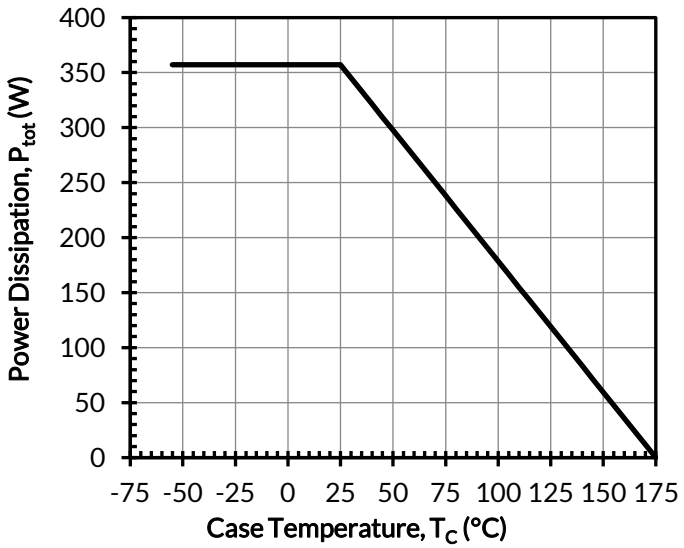

Figure 15. Total power dissipation

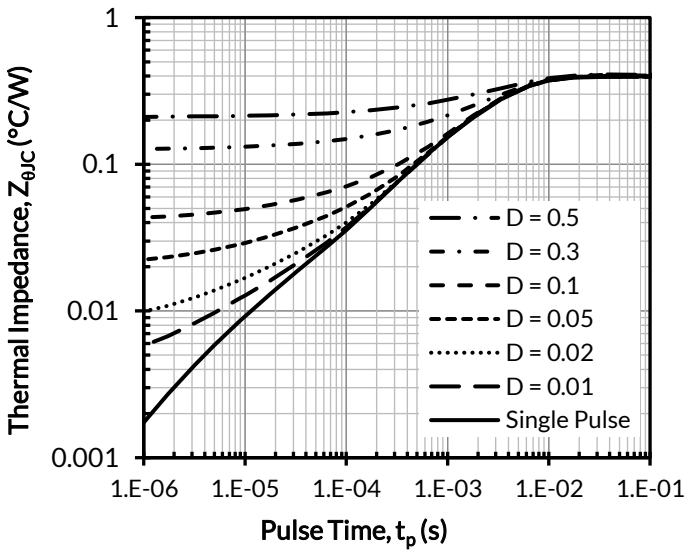

Figure 16. Maximum transient thermal impedance

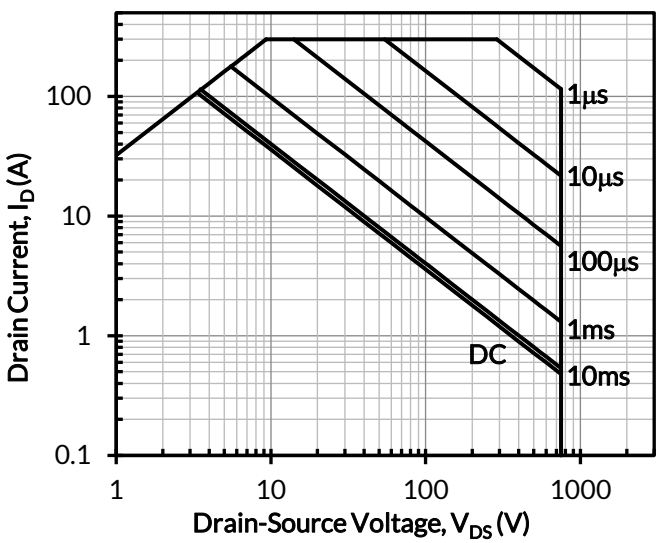

Figure 17. Safe operation area at T_C = 25°C, D = 0, Parameter t_p

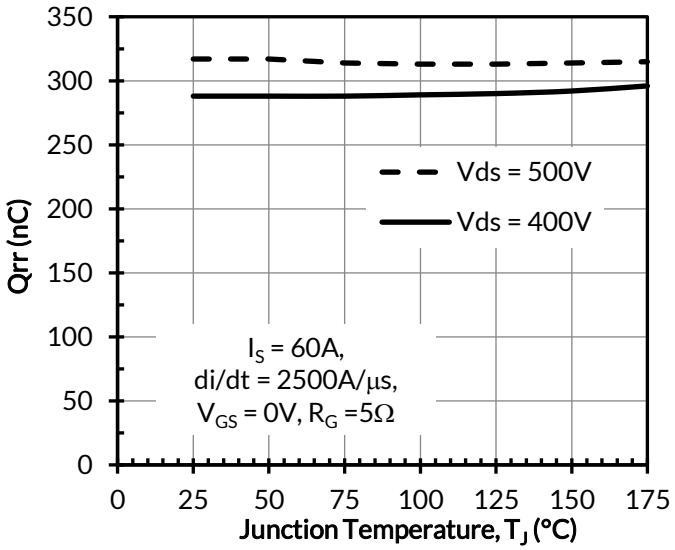

Figure 18. Reverse recovery charge Qrr vs. junction temperature

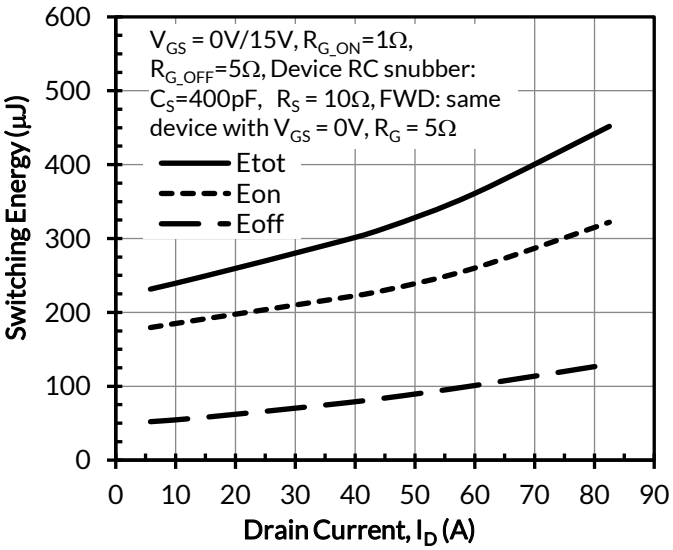

Figure 19. Clamped inductive switching energy vs. drain current at V_{DS} = 400V and T_J = 25°C

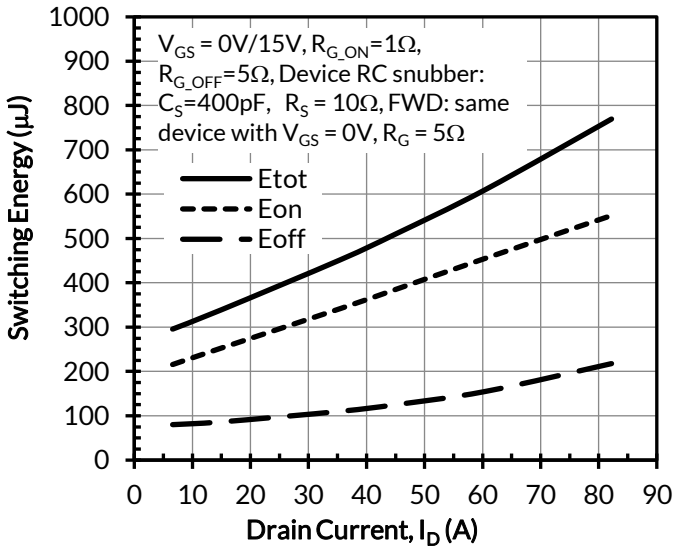

Figure 20. Clamped inductive switching energy vs. drain current at V_{DS} = 500V and T_J = 25°C

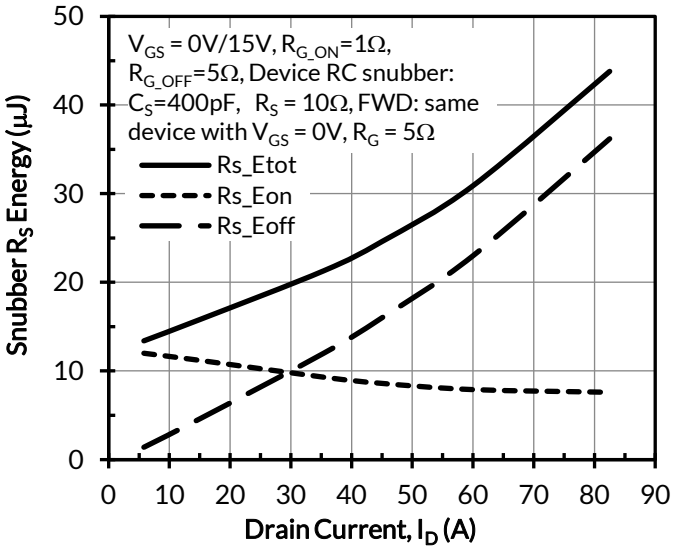

Figure 21. RC snubber energy loss vs. drain current at V_{DS} = 400V and T_J = 25°C

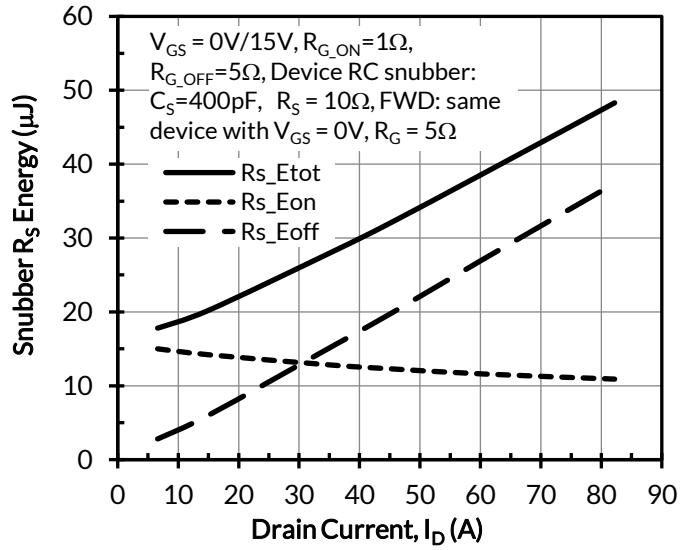

Figure 22. RC snubber energy losses vs. drain current at V_{DS} = 500V and T_J = 25°C

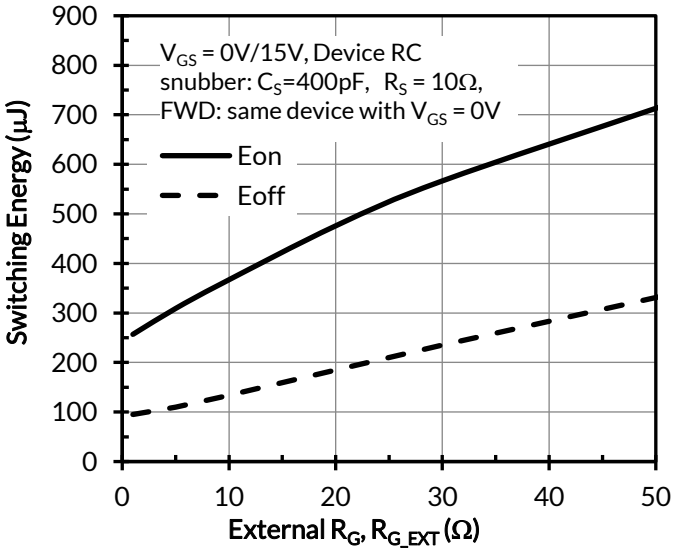

Figure 23. Clamped inductive switching energies vs. $R_{G,EXT}$ at V_{DS} = 400V, I_D = 60A, and T_J = 25°C

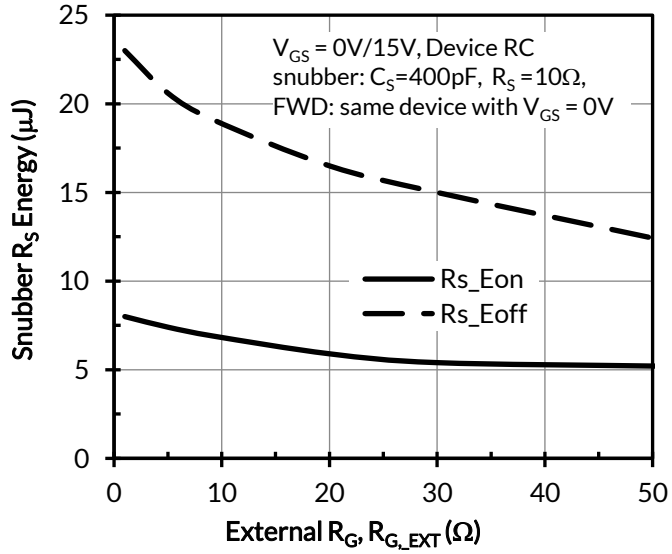

Figure 24. RC snubber energy losses vs. $R_{G,EXT}$ at V_{DS} = 400V, I_D = 60A, and T_J = 25°C

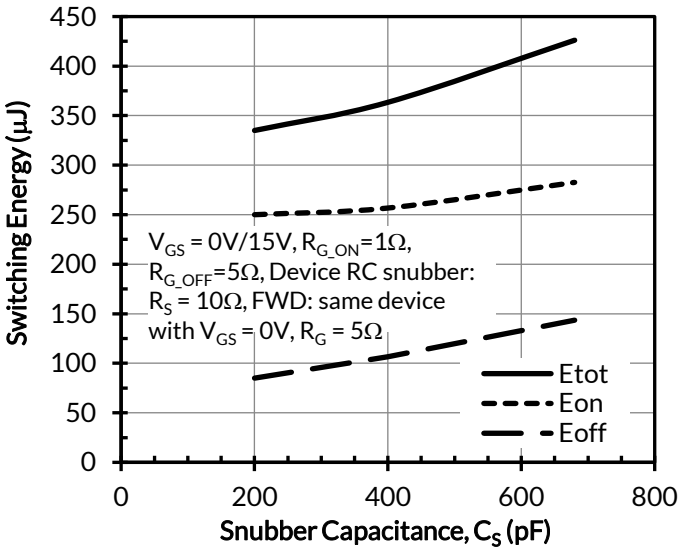

Figure 25. Clamped inductive switching energies vs. snubber capacitance C_S at V_{DS} = 400V, I_D = 60A, and T_J = 25°C

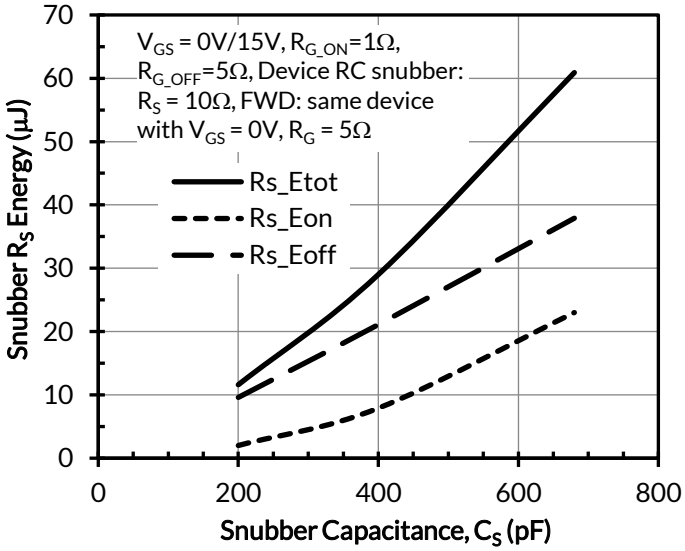

Figure 26. RC snubber energy losses vs. snubber capacitance C_S at V_{DS} = 400V, I_D = 60A, and T_J = 25°C

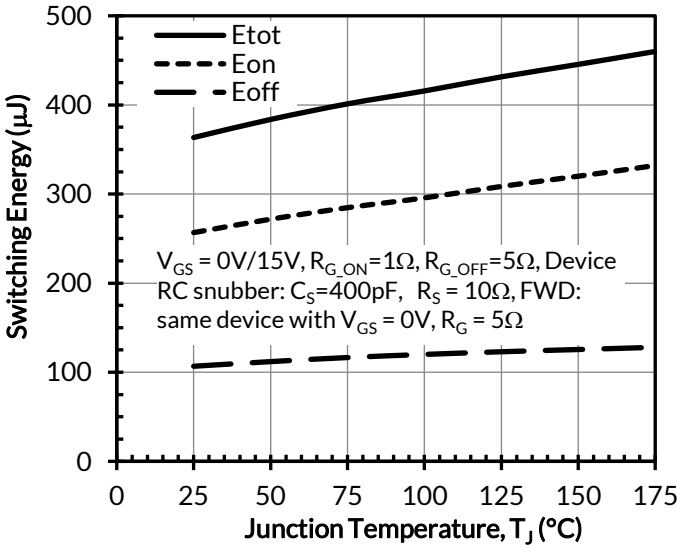

Figure 27. Clamped inductive switching energy vs. junction temperature at V_{DS} =400V and I_D = 60A

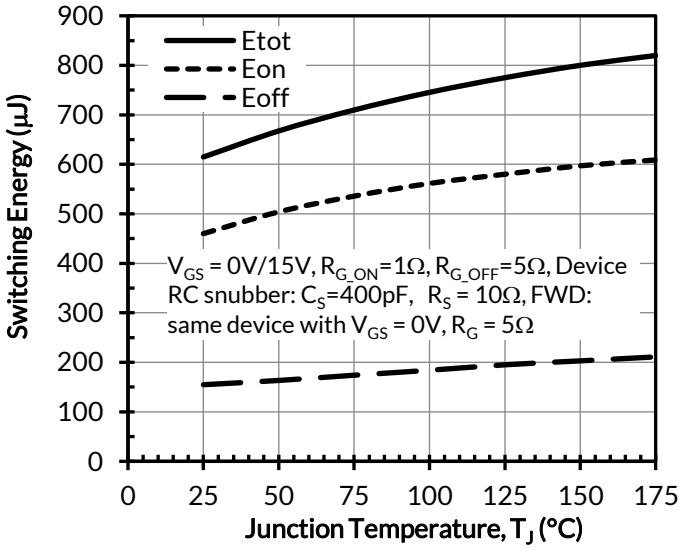

Figure 28. Clamped inductive switching energy vs. junction temperature at V_{DS} =500V and I_D = 60A

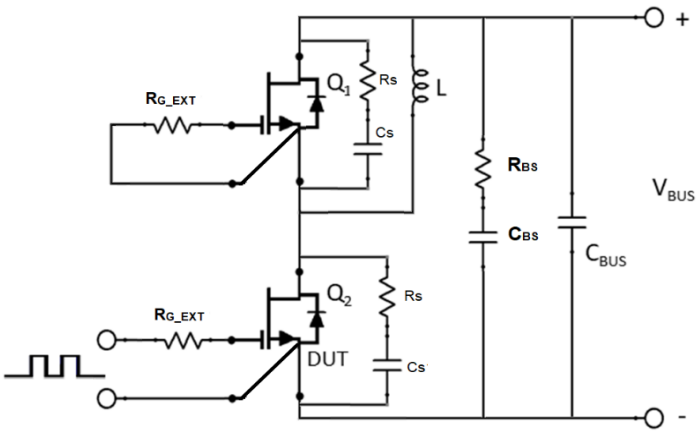

Figure 29. Schematic of the half-bridge mode switching test circuit. Note, a bus RC snubber (R_{BS} = 1Ω, C_{BS}=100nF) is used to reduce the power loop high frequency oscillations.

Applications Information

SiC FETs are enhancement-mode power switches formed by a high-voltage SiC depletion-mode JFET and a low-voltage silicon MOSFET connected in series. The silicon MOSFET serves as the control unit while the SiC JFET provides high voltage blocking in the off state. This combination of devices in a single package provides compatibility with standard gate drivers and offers superior performance in terms of low on-resistance ($R_{DS(on)}$), output capacitance (C_{oss}), gate charge (Q_G), and reverse recovery charge (Qrr) leading to low conduction and switching losses. The SiC FETs also provide excellent reverse conduction capability eliminating the need for an external anti-parallel diode.

Like other high performance power switches, proper PCB layout design to minimize circuit parasitics is strongly recommended due to the high dv/dt and di/dt rates. An external gate resistor is recommended when the FET is working in the diode mode in order to achieve the optimum reverse recovery performance. For more information on SiC FET operation, see www.unitedsic.com.

Disclaimer

UnitedSiC reserves the right to change or modify any of the products and their inherent physical and technical specifications without prior notice. UnitedSiC assumes no responsibility or liability for any errors or inaccuracies within.

Information on all products and contained herein is intended for description only. No license, express or implied, to any intellectual property rights is granted within this document.

UnitedSiC assumes no liability whatsoever relating to the choice, selection or use of the UnitedSiC products and services described herein.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View UJ4SC075011K4S on WIN SOURCE
- Qorvo US Inc. Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management