



THE DATASHEET OF RQRA-1000-2000

RQRA-1000-2000



ELECTRICAL SPECIFICATIONS

PARAMETER	CONDITION	SYMBOL	VALUE			UNIT
			Min.	Typ.	Max.	
Lower Frequency ^{1,2}	Tuning Voltage:1.0V	fo(Vt)			1000	MHz
Upper Frequency ^{1,2}	Tuning Voltage:20.0V	fo(Vt)	2000			MHz
Tuning Voltage		Vt	1.0		20.0	VDC
Supply Voltage		Vcc	9.75	10.0	10.25	VDC
Supply Current	Vcc=10.0V			15	25	mA
Tuning Sensitivity	Over Tuning Range, 1.0-20.0V	df/dVt		53		MHz/V
Pushing	Over Supply Variation	df/dVcc		2.5	5.0	MHz/V
Pulling ^{1,3}		df/dZI		7.5	15.0	MHz pk-pk
2 nd Harmonic	Vcc=10.0V	a(n*fo)		-10	-5	dBc
Input Capacitance		C _{IN}			33	pF
Operating Temperature Range		Ta	-40		+85	°C
Storage Temperature Range		Tstor	-45		+90	°C
Maximum Voltage	V _{cc(abs)}				11.0	V
Moisture Sensitivity Level	MSL	JEDEC J-STD-2	1			
Termination Finish			Glass-reinforced laminate base and nickel-silver cover			
ESD Sensitivity	HBM	Human body model JESD22-A114		3		kV

OUTPUT CHARACTERISTICS

SINE-WAVE	PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
				Min	Typ.	Max	
	Sine Output Voltage Level	Pw	Output termination 50Ω	+6.0	+9.0	+12.0	dBm
	Supply Current	Is	Vcc, ±5%		15	25	mA
	Output Load	O _{CL}			50		Ω

RQRA-1000-2000

PHASE NOISE


PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
			Min	Typ	Max	
SSB Phase noise	$\Sigma(\Delta f)$	$\Delta f=10\text{kHz}$		-95		dBc
		$\Delta f=100\text{ kHz}$		-115		

COMMON SPECIFICATIONS

- 1.1 -Load impedance is 50 Ohms.
- 1.2- The frequency range is defined between the (max) lower frequency and (min) upper frequency.
- 1.3 -Pulling is measured with 12dB return loss, all phases.
- 1.4- Package outline tolerances are typ. $\pm 0.30\text{mm}$ / $\pm 0.012\text{inch}$ if not stated differently on the drawing.
- 1.5 -It is recommended to provide two bypass-capacitors (ceramic), from Vcc to Gnd, 1nF || 100pF.
- 1.6- Solder temperature (peak) is 260°C for 10-20s.

RQRA-1000-2000

REFLOW PROFILE

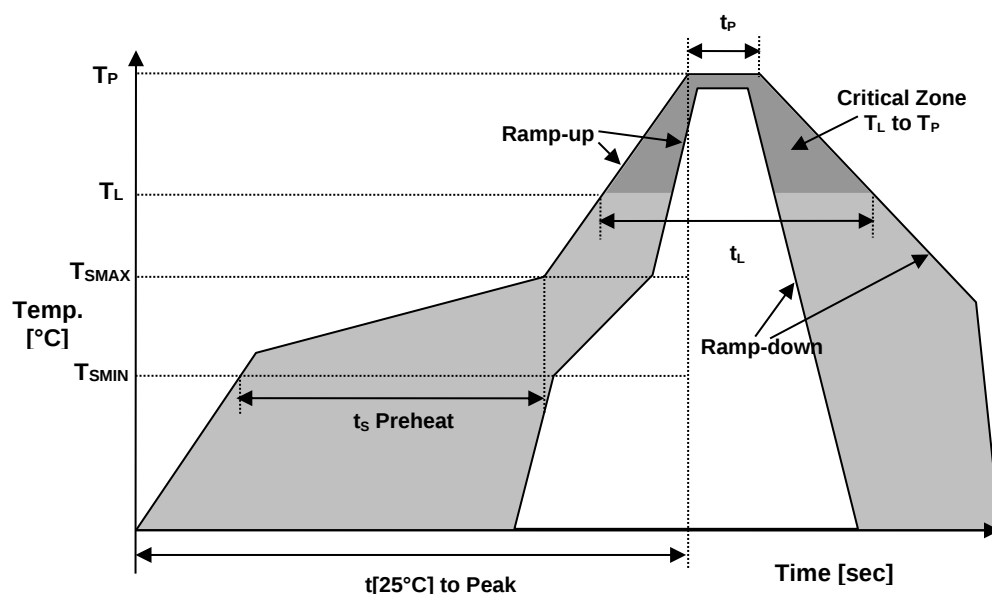

Recommended Solder Reflow Profile		
Temperature Min Preheat	T _{SMIN}	150°C
Temperature Max Preheat	T _{SMAX}	175°C
Time (T _{SMIN} to T _{SMAX})	t _s	60-180 sec.
Temperature	T _L	217°C
Peak Temperature	T _P	260°C
Ramp-up rate	R _{UP}	3°C/sec max.
Ramp-down rate	R _{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t _p	10-20 sec max.
Time t[25°C] to Peak Temperature	t[25°C] to Peak	480 sec.
Time	t _L	60-150 sec.

APPROVALS		
Eng. approval, date:	CP	05/10/2021
Created by, date:	AR	05/10/2021
Revision: A		

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ View [RQRA-1000-2000](#) on WIN SOURCE
- ⊖ [Raltron Electronics Corporation](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management