



**THE DATASHEET OF  
REC6-2415DRW/R10/A**



# Features

## Regulated Converters

- 8kVDC & 10kVDC Reinforced Isolation
- Industry Standard DIP24 Package
- 6W Regulated Output
- Continuous Short Circuit Protection
- Wide Input 2:1
- Medical Approved
- EN, CSA and CB Certificates
- 2 Pinout Options
- Control Pin Option
- Efficiency to 86%

### Description

The REC6 series uses a reinforced isolation transformer to offer exceptionally high isolation of 8kVDC (4kVAC/1 minute) or 10kVDC (5kVAC/1minute) making it suitable for HT monitoring circuits, mains power meters, IGBT isolated power supplies and other sophisticated industrial and medical applications. The isolation capacitance of only 20pF makes them also suitable for low leakage applications. The isolation transformer is recognized by CSA as reinforced isolated with a minimum internal clearance of 2.4mm and a minimum internal creepage clearance of 4.6mm. The REC6 is available in two industry-standard pinouts (= "/A" or "/C"). Remote on/off control is possible with the /CTRL option (A pinning only) and an optional undervoltage lockout function is also available (= "/X1"). The converters can deliver 140% rated power for short periods of time to cope with applications with large capacitive loads or high start up currents.

### Selection Guide

Part Number DIP24	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (%)	Max Capacitive Load <sup>(1)</sup>
REC6-xx05SRW/R*	9 - 18, 18 - 36, 36 - 75 4.5 - 9	5	1000	80, 81, 82 77	6800µF
REC6-xx09SRW/R*	9 - 18, 18 - 36, 36 - 75 4.5 - 9	9	667 555	81, 82, 83 80	6800µF
REC6-xx12SRW/R*	9 - 18, 18 - 36, 36 - 75 4.5 - 9	12	500 417	82, 83, 84 82	6800µF
REC6-xx15SRW/R*	9 - 18, 18 - 36, 36 - 75 4.5 - 9	15	400 333	84, 85, 86 83	6800µF
REC6-xx24SRW/R*	9 - 18, 18 - 36, 36 - 75 4.5 - 9	24	250 208	83, 84, 85 82	4700µF
REC6-xx05DRW/R*	9 - 18, 18 - 36, 36 - 75 4.5 - 9	±5	±500	80, 81, 82 77	±2200µF
REC6-xx09DRW/R*	9 - 18, 18 - 36, 36 - 75 4.5 - 9	±9	±335 ±278	81, 82, 83 80	±2200µF
REC6-xx12DRW/R*	9 - 18, 18 - 36, 36 - 75 4.5 - 9	±12	±250 ±208	81, 82, 83 82	±2200µF
REC6-xx15DRW/R*	9 - 18, 18 - 36, 36 - 75 4.5 - 9	±15	±200 ±167	82, 83, 84 80	±2200µF

R\* = R8 or R10 for 8kVDC or 10kVDC isolation.

Note 1: Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter.

\* add suffix "/A" or "/C" for pinning options, see next page for details.

\* add suffix "/CTRL" for control pin option (A Pinning only)

\* add suffix "/X1" for Undervoltage Lockout

#### 2:1 Input

(REC6-S\_DRW/R8(R10))

xx = 4.5-9Vin = 05

xx = 9-18Vin = 12

xx = 18-36Vin = 24

xx = 36-75Vin = 48

#### Ordering Examples:

REC6-0512DRW/R8/A/CTRL= 5V Vin, ±12V Vout, 8kVDC isolation, pinout "A", control pin

REC6-4805SRW/R10/A = 48V Vin, 5V Vout, 10kVDC isolation, pinout "A"

REC6-1212DRW/R8/C/X1 = 12V Vin, ±12V Vout, 8kVDC isolation, pinout "C", UVL

REC6-0505SRW/R10/A/CTRL/X1 = 5V Vin, 5V Vout, 10kVDC isolation, pinout "A", control pin, UVL

# ECONOLINE

DC/DC-Converter

with 3 year Warranty

# RECOM


## 6 Watt DIP24 Reinforced Single & Dual Output



**C22.2-No. 60950 Certified**  
**C22.2-601.1 Certified**  
**UL-60601.1 Certified**

# REC6/R

## Derating-Graph (Ambient Temperature)

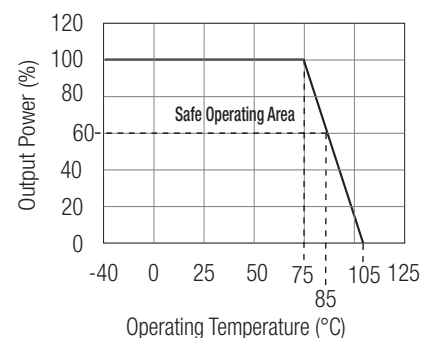

Refer to Application Notes

### Specifications (measured at $T_A = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)


Input Voltage Range			2:1	
Output Voltage Accuracy			$\pm 2\%$ max.	
Line Regulation	(HL-LL)		$\pm 0.3\%$ max.	
Load Regulation	(for output load current change from 20% to 100%)		$\pm 0.6\%$ max.	
Input Surge	(1 minute)	5V types	16V max.	
		12V types	25V max.	
		24V types	50V max.	
		48V types	100V max.	
Undervoltage Lockout	(X1 Versions)	5V types	3.5V typ. ( $\pm 20\%$ )	
		12V types	7V typ. ( $\pm 20\%$ )	
		24V types	15V typ. ( $\pm 10\%$ )	
		48V types	32V typ. ( $\pm 10\%$ )	
Output Ripple and Noise	(0, 1 $\mu\text{F}$ capacitor on output, 20MHz BW limited)		200mVp-p max.	
Transient Response	(25% step change)		1ms typ.	
Switching Frequency	(Full load and nominal input voltage)		100kHz min. / 350kHz max.	
Input Filter			Pi Network	
Capacitors	All types		MLCC capacitors only	
Minimum Load	(Operation under no-load will not damage the converter, but it may not meet all specifications)		20% Full Load	
No Load Power Consumption			400mW max.	
Isolation Voltage	R8-Suffix	(tested for 1 second)	8000VDC	
		(rated for 1 minute**)	4000VAC / 60Hz	
Isolation Voltage	R10-Suffix	(tested for 1 second)	10000VDC	
		(rated for 1 minute**)	5000VAC / 60Hz	
Isolation Capacitance			20pF typ.	
Isolation Resistance			10 G $\Omega$ min.	
Short Circuit Protection	(Max operating temp. = $50^\circ\text{C}$ during short circuit conditions)		Continuous, Auto Restart	
Operating Temperature Range	(free air convection)		$-40^\circ\text{C}$ to $+75^\circ\text{C}$ (see Graph)	
Case Temperature			$105^\circ\text{C}$ max.	
Storage Temperature Range			$-55^\circ\text{C}$ to $+125^\circ\text{C}$	
Relative Humidity			95% RH	
Case Material			Non-Conductive Plastic	
Potting Material			Silicone	
Thermal Impedance	Natural convection		$20^\circ\text{C}/\text{W}$	
Package Weight			14g	
Packing Quantity			15 pcs per Tube	
MTBF ( $+25^\circ\text{C}$ )	} <i>Detailed Information see</i>	using MIL-HDBK 217F	$953 \times 10^3$ hours	
		using MIL-HDBK 217F	$234 \times 10^3$ hours	
( $+75^\circ\text{C}$ )	} <i>Application Notes chapter "MTBF"</i>			
EMC	Conducted Emissions	EN55022	Class A	
	Radiated Emissions	EN55022	Class A	
(with 470 $\mu\text{F}$ /0.1 $\mu\text{F}$ capacitors across input)				
Reinforced Isolation	Transformer Creepage	/R8 and /R10 Types	4.6 mm min.	
	Transformer Clearance	/R8 and /R10 Types	2.4 mm min.	
	PCB Creepage & Clearance	/R8 and /R10 Types	6.0 mm min.	
	Optocoupler Creepage	/R8 and /R10 Types	6.0 mm min.	
External Creepage and Clearance	Plastic Case	Input <> Output pins	14.2 mm min.	
Certifications	EN Medical Safety	Report: MDD1207051 + RM1207051	EN 60601-1 3rd Edition	
		Medical Report + ISO14971 Risk Assessment		
	IEC Medical Safety	CB-Report: CA-10168-A1-UL	IEC60601-1 3rd Edition	
	CSA	Medical Safety	Report: 2202478	C22.2 601-1 2nd Ed.
	UL	Medical Safety	E314885-A4	UL 60601-1 3rd Edition
	UL 60950-1 1st Ed.	General Safety	Report: 2219431	C22.2 No. 60950-1-03
		Recognised as Reinforced Isolation	Supplement to Report: 2219431	

\*\*Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.


### Typical Characteristics

#### Efficiency vs Load

REC6-xx05SRW/R\*  
REC6-xx05DRW/R\*

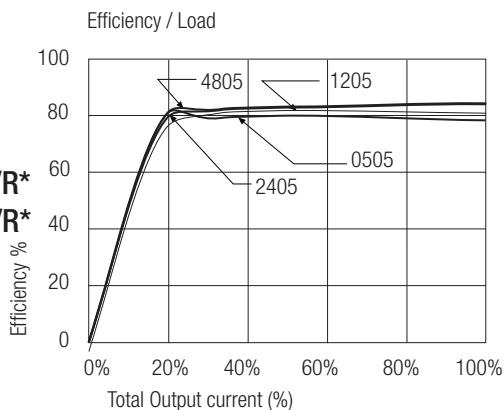


#### Efficiency vs Vin

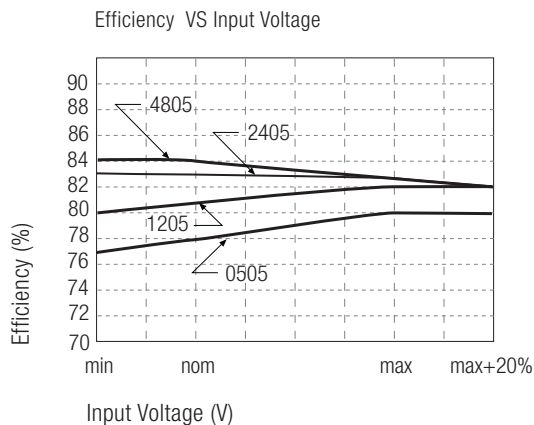


#### Efficiency / Load

REC6-xx12SRW/R\*

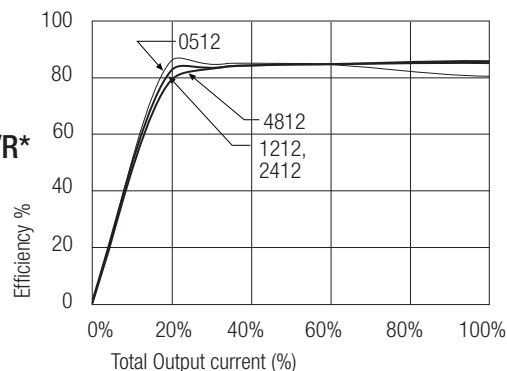


#### Efficiency VS Input Voltage

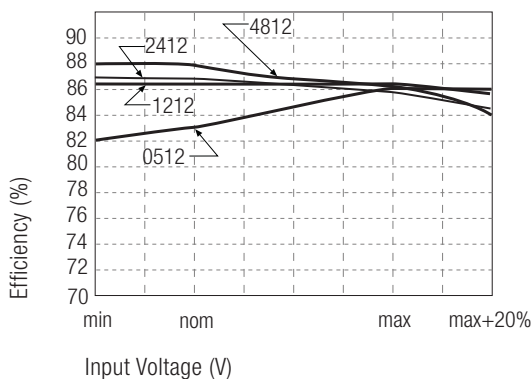


#### Efficiency / Load

REC6-xx24SRW/R\*  
REC6-xx12DRW/R\*

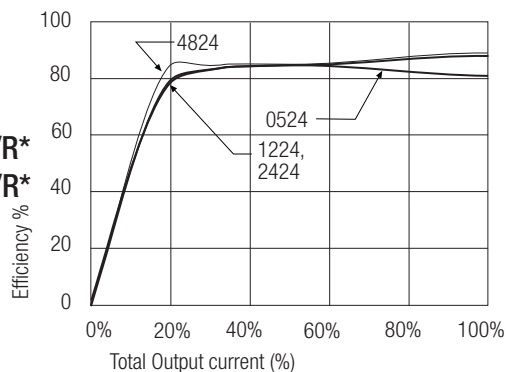


#### Efficiency VS Input Voltage

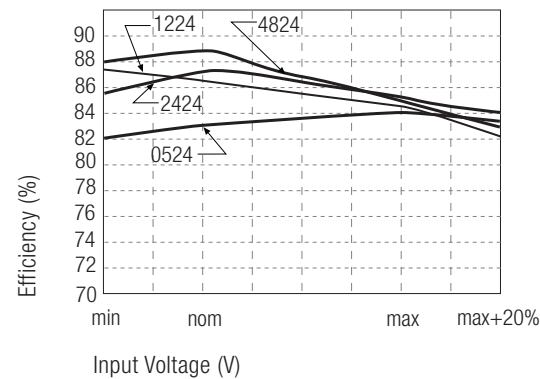


REC6/R

#### "A" Pinning /R8 & /R10

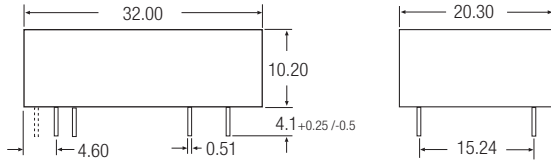

#### Recommended Footprint Details

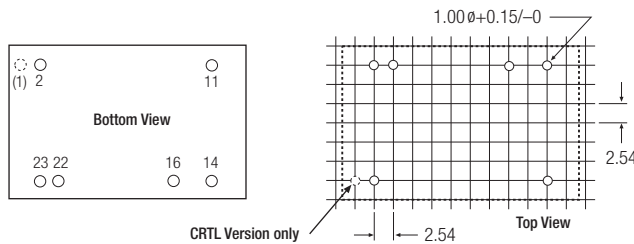

#### Pin Connections


Pin #	Single	Dual
1 (option)	CTRL	CTRL
2	-Vin	-Vin
11	NC	-Vout
14	+Vout	+Vout
16	-Vout	Com
22	+Vin	+Vin
23	+Vin	+Vin

NC = No Connection


XX.X ± 0.5 mm  
XX.XX ± 0.25 mm

#### CTRL Option


ON = Open or  $0V < V_{ctrl} < 1.2V$   
OFF =  $2.2V < V_{ctrl} < 12V$

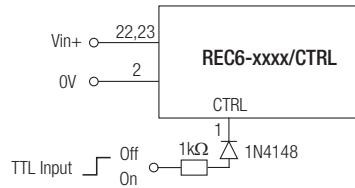

#### "C" Pinning /R8 & /R10

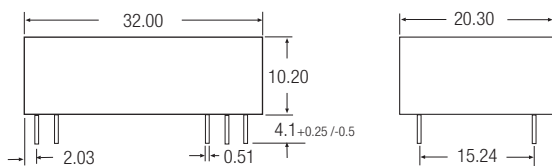

#### Recommended Footprint Details

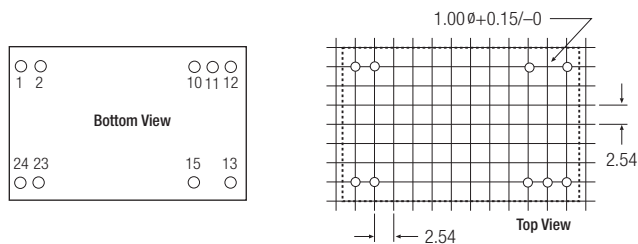

#### Pin Connections

Pin #	Single	Dual
1	+Vin	+Vin
2	+Vin	+Vin
10	NC	Com
11	NC	Com
12	-Vout	NC
13	+Vout	-Vout
15	NC	+Vout
23	-Vin	-Vin
24	-Vin	-Vin

NC = No Connection

XX.X ± 0.5 mm  
XX.XX ± 0.25 mm

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View REC6-2415DRW/R10/A on WIN SOURCE](#)
- ⊖ [Recom Power Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management