




**THE DATASHEET OF  
D\*C-20-24S-10000**



072240 SJ017240  
(DRAWING NO.)

版数 VER.	年月日 DATE	CN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.
10	12/NOV/2010	071025	Japanese-Bilingual ラベル貼り付け位置変更 其他	M. SHINOZAKI	K. KUGOU	O. TAKAGI	Y. OOTSUKA
11	04/MAR/2013	005585	誤記訂正		K. KUGOU	O. TAKAGI	T. MIYASHITA

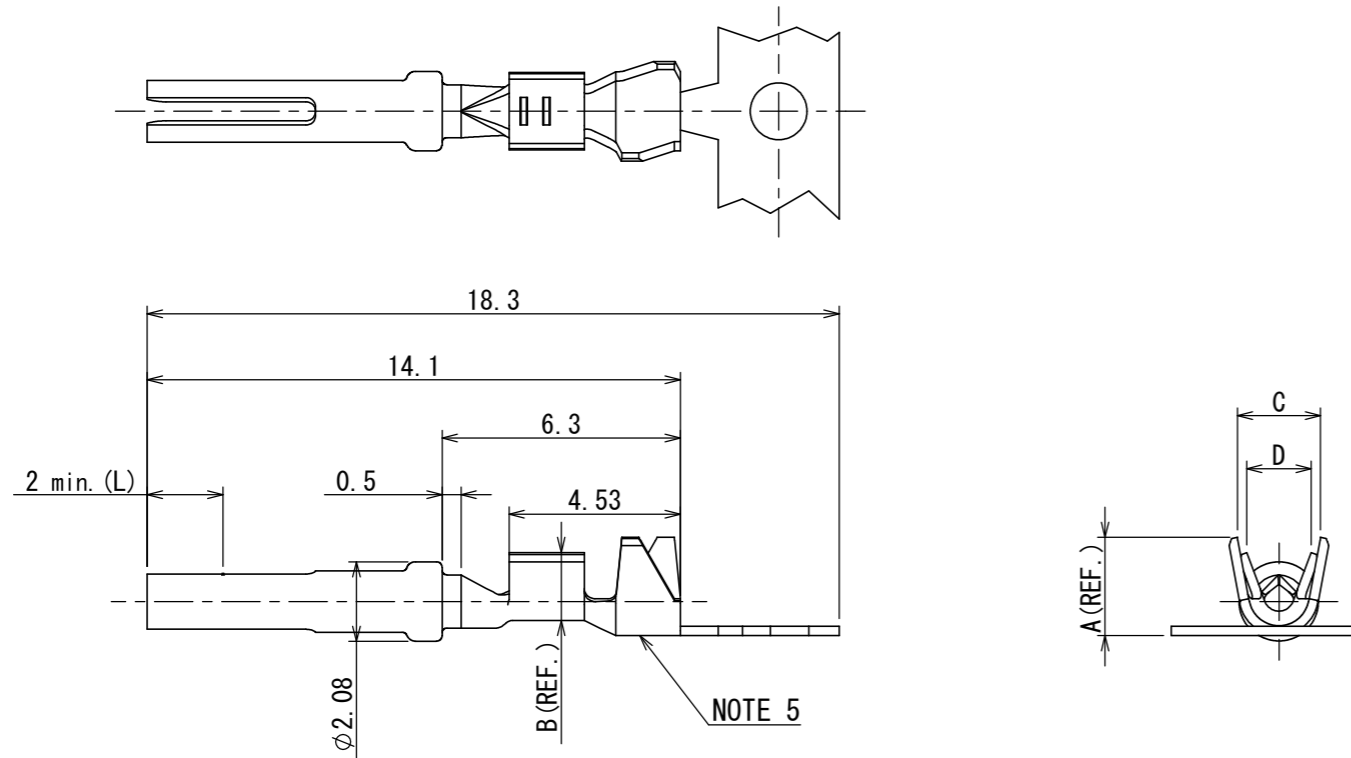

- NOTE 1. CONTACTS ARE SUPPLIED IN REELED FROM WITH 10000 CONTACTD PER REEL.  
 2. MARK TRADE PART No. AND No. OF CONTACTS.  
 3. CRIMP TOOL  
 TYPE: CT350-2C-D\*C (D\*C SEMI AUTOMATICH CRIMPING MACHINE AWG#22~#28)  
 CT350-2-D\*C30 (D\*C SEMI AUTOMATICH CRIMPING MACHINE AWG#28~#30)  
 4. CONTACT FILNISH


IN THE L DIMENSION	GOLD OVER NICKEL (AU 0.1 μM MIN, NI 1.50.1 μM MIN)
OTHER AREA	GOLD FLASH PLATING OVER NICKEL (GOLD FLASH, NI 1.5 μM MIN)

5. APPLICABLE WIRE IDENTIFICATION ARE MARKED AS INDICATED.  
 6. EXTRACTION TOOL JIET-D\*C-20 OR ET-20D IS USED.

PART NO.	D*C-20-22S-10000		D*C-20-24S-10000	
	AWG#22~24 (INSULATION DIA φ1.2~1.7)	AWG#24~28 (INSULATION DIA φ0.8~1.5)	AWG#30 (INSULATION DIA φ0.5~1.2)	
A	2.6		2.3	
B	1.8		1.55	
C	2.2		1.8	
D	1.7		1.5	
INDETIFICATION MARK (NOTE 5)	22		24	

- 注1. 本コンタクトは、リール状で供給され、10000本/リールとする。  
 2. 図示の位置に品名及び数量を記入した、ラベルが貼られている。  
 3. 下記の半自動圧着機に装着する。  
 型式：CT350-2C-D\*C (D\*C半自動圧着機AWG#22~#28圧着用)  
 CT350-2-D\*C30 (D\*C半自動圧着機AWG#28~#30圧着用)  
 4. コンタクト仕上

L寸法内	Ni上Auメッキ (Ni 1.5 μm以上、Au 0.1 μm以上)
その他	Ni上Auフラッシュ (Ni 1.5 μm以上 Auフラッシュ)

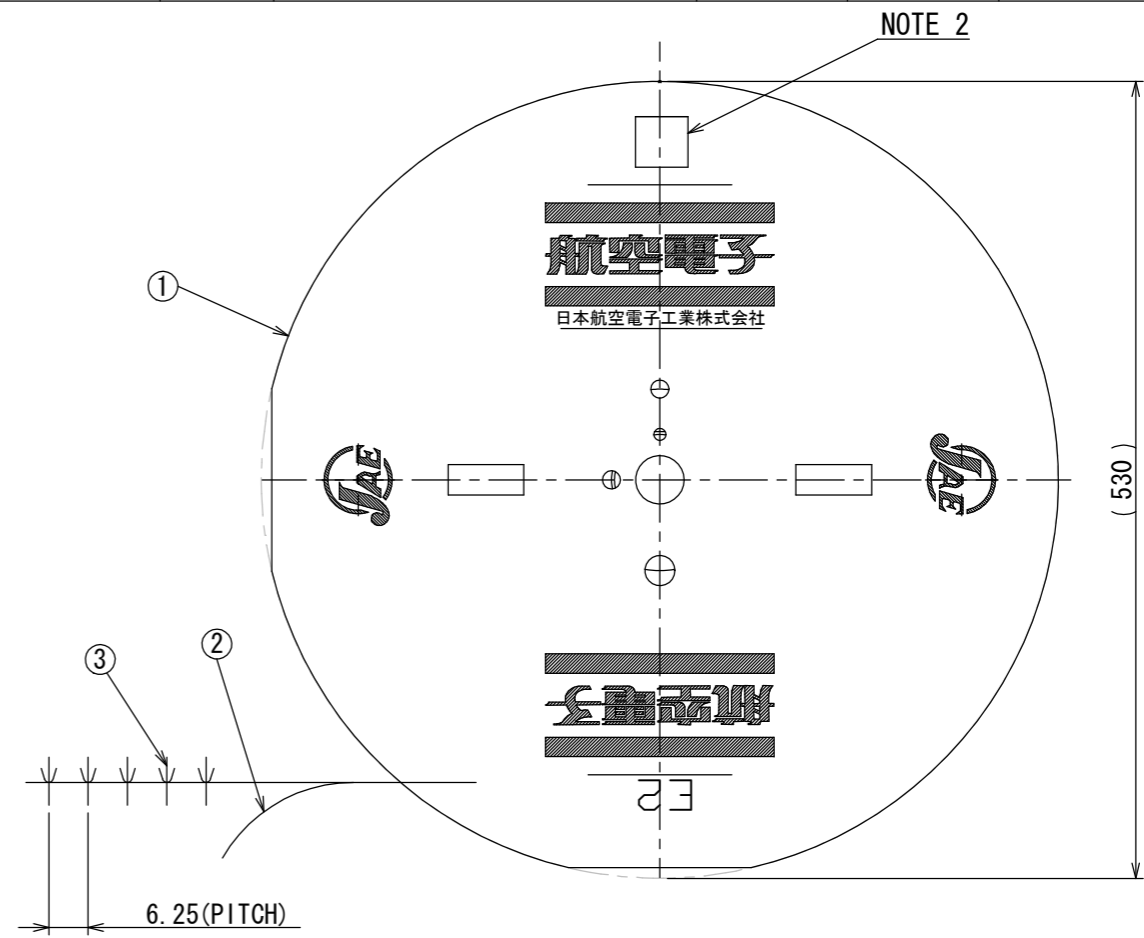


5. 図示の位置に適用電線識別マークが表示される。  
 6. 引抜工具はJIET-D\*C-20又は、ET-20Dを使用する。

品名	D*C-20-22S-10000		D*C-20-24S-10000	
	AWG#22~24 (仕上外径 φ1.2~1.7)	AWG#24~28 (仕上外径 φ0.8~1.5)	AWG#30 (仕上外径 φ0.5~1.2)	
A	2.6		2.3	
B	1.8		1.55	
C	2.2		1.8	
D	1.7		1.5	
識別マーク (注5)	22		24	

符号 NO.	名称 DESCRIPTION	個数 QTY.	材料 MATERIAL	仕上 FINISH	備考 REMARKS
3	SOCKET CONTACT	10000	COPPER ALLOY	NOTE 4	—
2	TAPE	1	PAPER	—	—
1	MAGAZINE	1	PAPER	—	—

仕様書 (SPECIFICATION)	第1版 (ORIGINAL DATE) 17/DEC/1981	尺度 (SCALE)	シリーズ (SERIES) Dsub	日本航空電子工業株式会社
一般公差 (GENERAL TOLERANCE)	製図 DR. K. KATOU	名称 (TITLE)		JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.
寸法 (DIMENSION)	担当 CHK. O. TAKAGI	D*C-20-22S-10000 D*C-20-24S-10000		
角度 (ANGLES)	査閲 APPD. Y. TAKEUCHI			
±0.8	承認 APPD. S. HASHIMOTO			
× ±0.4				
×× ±0.1				
××× ±				
単位 (UNIT) : mm		質量 (MASS)		図面番号 (DRAWING NO.) SJ017240

DCF-C-212H(12.08)



WISDOM承認 2013/03/04

SIZE A3  
版数 (VER.)  
11

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View D\\*C-20-24S-10000](#) on WIN SOURCE

 [JAE Electronics](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management