




**THE DATASHEET OF  
AS1E-2M-10-Z**



# AS

## Hyper-miniature Slide Switches



RoHS Compliant


### Features

- High Contact Reliability  
Twin-contact clip mechanism for high contact reliability.
- Gold-plated contacts suitable for low current applications
- For PC board mounting
- Improved operability  
The independent detent structure provides a light operating touch.

### Specifications


Rating	0.4VA AC/DC	Voltage range	20 mV~60 V
	Max.	Current range	1μA~50 mA
	Min.		50 mA 60 VAC/DC
			1μA 20 mVAC/DC
Initial contact resistance	50 mΩ max.		(1.5 mA 200 μVAC)
Dielectric strength	250 VAC 1 minute		
Initial insulation resistance	500 MΩ min.		(500 VDC)
Electrical life	10,000 cycles at max. rating.		
	50,000 cycles at min. rating or 0.4 VA		
Operating force	0.69~4.9N		
Operating temperature range	-20°C~+85°C		
Storage temperature range	-40°C~+85°C		

### Part Numbering

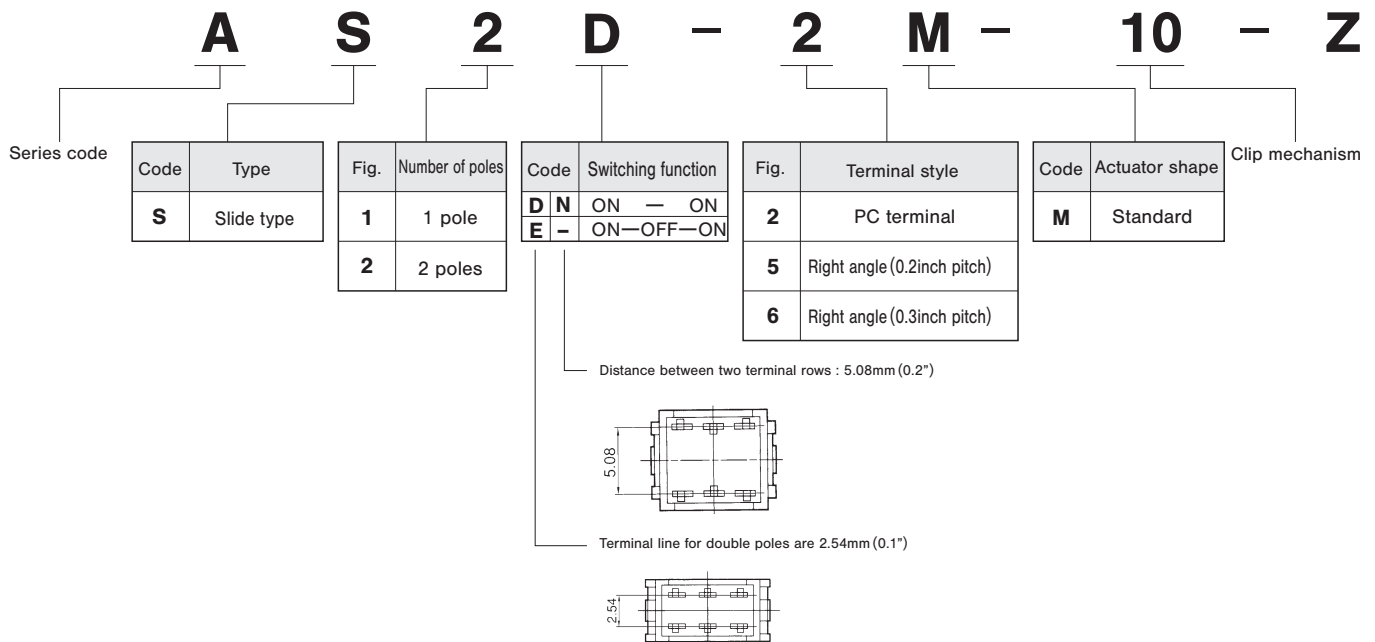


AS

**SPDT**




PC

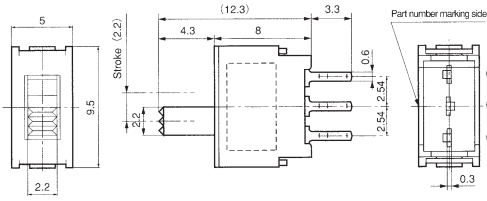


Switching function	Viewed from part No. marking side		
Part No.			
AS1D-2M-10-Z	ON	-	ON
☆AS1E-2M-10-Z	ON	OFF	ON
Connecting terminals	2-1	-	2-3

**DPDT**

Distance between two terminal rows : 2.54 mm




PC

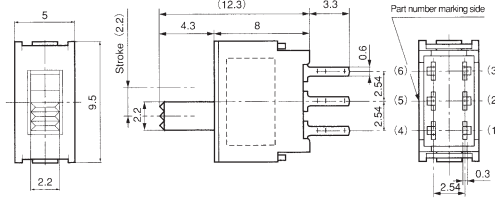


Switching function	Viewed from part No. marking side		
Part No.			
AS2D-2M-10-Z	ON	-	ON
Connecting terminals	2-1 5-4	-	2-3 5-6

**DPDT**

Distance between two terminal rows : 5.08 mm




PC

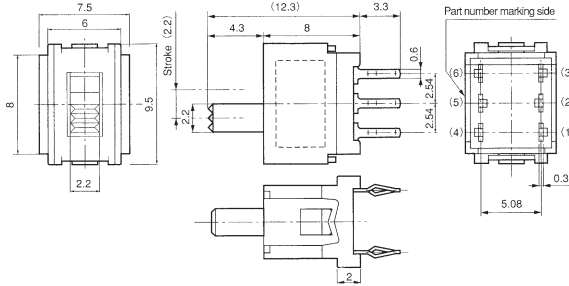


Switching function	Viewed from part No. marking side		
Part No.			
★AS2N-2M-10-Z	ON	-	ON
Connecting terminals	2-1 5-4	-	2-3 5-6

**SPDT**

※Mounting height : 3.1mm




0.2R/A

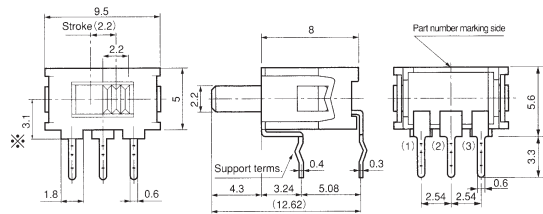


Switching function	Viewed from part No. marking side		
Part No.			
AS1D-5M-10-Z	ON	-	ON
AS1E-5M-10-Z	ON	OFF	ON
Connecting terminals	2-1	-	2-3

**DPDT**

※Mounting height : 3.1mm




0.2R/A

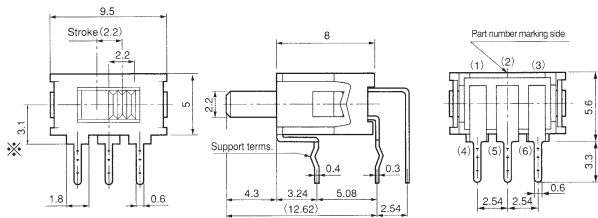


Switching function	Viewed from part No. marking side		
Part No.			
AS2D-5M-10-Z	ON	-	ON
Connecting terminals	2-1 5-4	-	2-3 5-6

**DPDT**

※Mounting height : 5.15mm



0.2R/A

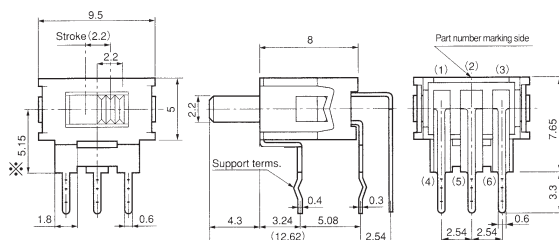


Switching function	Viewed from part No. marking side		
Part No.			
★AS2N-5M-10-Z	ON	-	ON
Connecting terminals	2-1 5-4	-	2-3 5-6


☆ : Semi-standard products. ★ : Made to order products. Terminal numbers are not shown on the switch. Non-marking : standard stock items.

**SPDT**

※Mounting height : 3.1mm




0.3R/A

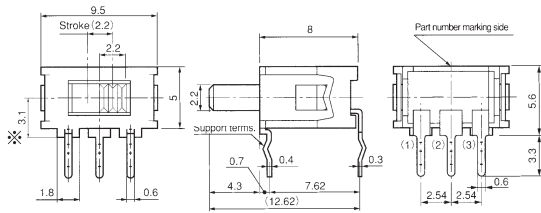


Switching function	Viewed from part No. marking side		
Part No.	<b>AS1D-6M-10-Z</b>	—	ON
Connecting terminals	2-1	—	2-3

**DPDT**

※Mounting height : 3.1mm




0.3R/A

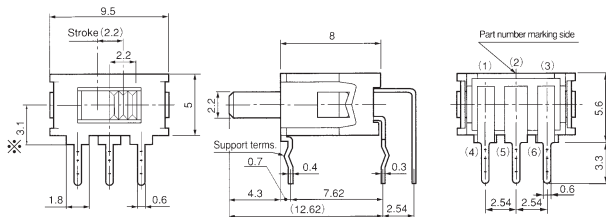


Switching function	Viewed from part No. marking side		
Part No.	☆ <b>AS2D-6M-10-Z</b>	—	ON
Connecting terminals	2-1 5-4	—	2-3 5-6

**DPDT**

※Mounting height : 5.15mm



0.3R/A

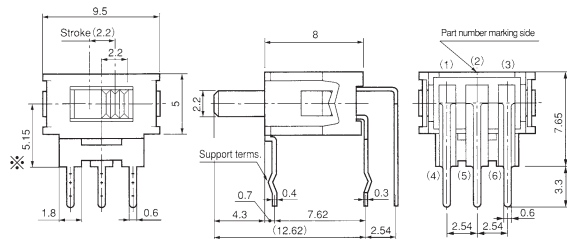



Switching function	Nimbus Sans		
Part No.	☆ <b>AS2N-6M-10-Z</b>	—	ON
Connecting terminals	2-1 5-4	—	2-3 5-6

■ Actuator Shape

■ Bracket Installation Procedure

■ Optional Accessories

(Sold separately)

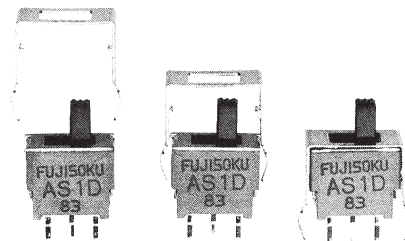

Part Name	Bracket
Part No.	<b>140000640324</b>
Dimensions	

■ PC Hole Layouts

Series	PC terminal		Right Angle terminal	
	Without bracket	With bracket	0.2inch pitch	0.3inch pitch
<b>AS1D</b> <b>AS1E</b>				
<b>AS2D</b>				
<b>AS2N</b>				


☆ : Semi-standard products.

: Optional Accessories.

## ■ Handling Precautions

### 1. Soldering Specifications

- (1) Manual Soldering  
Device : Soldering iron  
380°C, Max.; 3 seconds, Max.
- (2) Auto Soldering  
Device : Jet wave type or dip type  
275°C, Max.; 6 seconds, Max.  
• Pre-heating should be done at temperatures ranging from 80°C to 120°C and within 120 sec.




### 2. Flux Cleaning

- (1) Solvent : Fluorine or Alcohol type.
- (2) Cleaning after soldering should be done after the terminal temperature falls to 90°C or below, or after leaving the switch for five minutes or longer at room temperature.  
AS series are not process sealed and are not washable. If the PC board is to be cleaned, clean the soldering surface of substrate with a brush so that the switch is not exposed to the cleaning solution.
- (3) Do not use ultrasonic cleaning system.

### 3. Mounting of Switch

- (1) Use the PC boards of  $\phi 1$  holes.
- (2) Do not bend the terminals before mounting the switch on the PC board.
- (3) After mounting the switch, do not place the device in such a way that the device weight will be applied on the knob, etc. of the switch.
- (4) Do not apply load exceeding 12.7 N (1.3 kgf) to the knob. Use a bracket (optional accessory) if the load is expected to exceed 12.7 N (1.3 kgf). The strength of the knob will be reinforced to 29.4 N (3 kgf) max.


## ■ Packaging Specifications

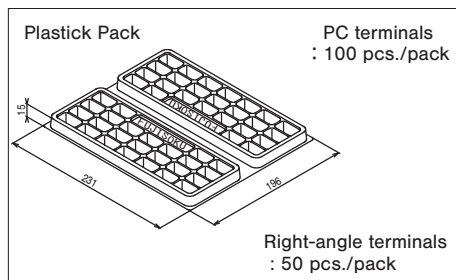

■ Shorting (Make-Before-Break)

A switch which momentarily connects both circuits when the actuator is moved from Point A to B in the below figure.

All switches which are not marked as "Shorting" are "Non-shorting" (Break-Before-Make).

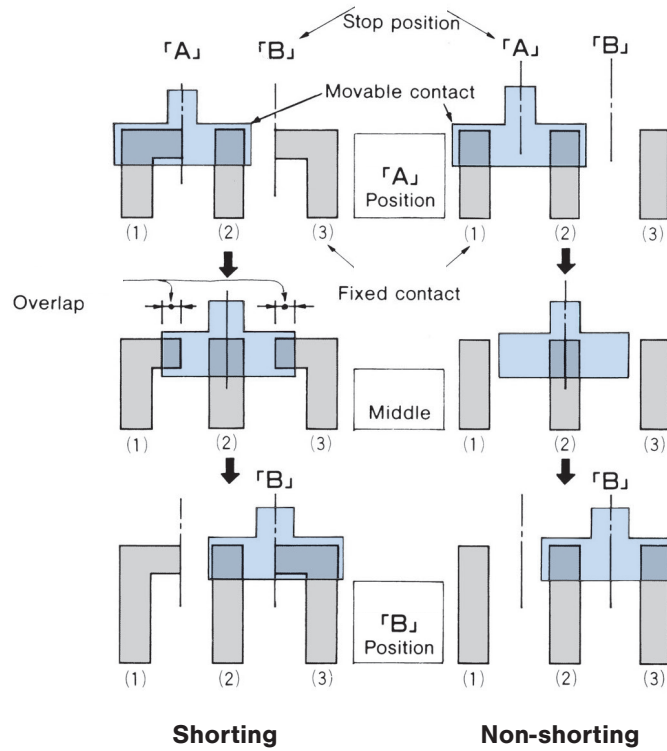

[Fig.1]

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View AS1E-2M-10-Z on WIN SOURCE](#)
- ⊖ [Nidec Copal Electronics Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management