



**THE DATASHEET OF
AH3740A-100K**






AH3740 Series



Halogen Free

1. Features of AH3740 Series:

- Ferrite based SMD inductor with lower core loss.
- Inductance range: 45.0 nH to 330.0 nH , custom values are welcomed.
- High current output chokes, up to 155.0 Amp with approx. 20% roll off.
- Low profile 10.00 mm Max. height (60nH,70nH,80nH and 90nH is 10.40mm Max. , 100nH is 10.20mm Max. , 120nH is 10.10mm Max.,45L,50L is 10.70mm Max.).
- 9.60 x 6.40 mm Foot Print.
- Perfect for high density designs with limited board space.
- Operating frequency of up to 5.0MHz.
- Operating temperature range of -55° C to + 130° C. RoHS & HF compliant.
- T & R Qty's: 500pcs, 13" Reel.

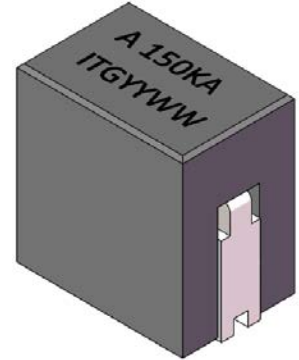


2. Electrical Characteristics of AH3740 Series:

ITG Part Number	OCL ¹ (nH) ± 10% or 15%	L @ Isat ² (nH) Min.	DCR ³ (mΩ) ± 5%	Isat1 ⁴ (A) @25°C	Isat2 ⁴ (A) @75°C	Isat3 ⁴ (A) @100°C	Irms ⁵ (A) @25°C	C (mm) Max.
AH3740A-45L	45.00 , 15%	32.40	0.145	240.00	205.00	200.00	78.00	10.70
AH3740A-50L	50.00 , 15%	36.00	0.145	210.00	200.00	180.00	78.00	10.70
AH3740A-60L	60.00 , 15%	43.20	0.145	155.00	150.00	140.00	78.00	10.40
AH3740A-70K	70.00 , 10%	50.40	0.145	124.00	120.00	115.00	78.00	10.40
AH3740A-80K	80.00 , 10%	57.60	0.145	118.00	110.00	102.00	78.00	10.40
AH3740A-90K	90.00 , 10%	64.80	0.145	106.00	98.00	92.00	78.00	10.40
AH3740A-100K	100.00 , 10%	72.00	0.145	95.00	88.00	82.00	78.00	10.20
AH3740A-120K	120.00 , 10%	86.40	0.145	78.00	71.00	67.00	78.00	10.10
AH3740A-150K	150.00 , 10%	108.00	0.145	60.00	54.00	52.00	78.00	10.00
AH3740A-180K	180.00 , 10%	129.60	0.145	49.00	45.00	43.00	78.00	10.00
AH3740A-220K	220.00 , 10%	158.40	0.145	38.00	36.00	34.00	78.00	10.00
AH3740A-270K	270.00 , 10%	194.40	0.145	30.00	29.00	27.00	78.00	10.00
AH3740A-300K	300.00 , 10%	216.00	0.145	27.00	24.00	23.00	78.00	10.00
AH3740A-330L	330.00 , 15%	237.60	0.145	20.00	19.00	17.00	78.00	10.00


3. Mechanical Dimension of AH3740 Series:

A	B	C	D	E	F	G
Max.	Max.	Max.	Max.	(Ref.)	± 0.20	± 0.30
6.40	9.50	See table above	9.60	6.60	2.20	1.50

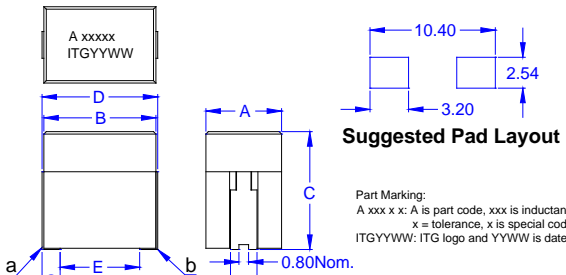

Notes:

Third Angle Projection:



1. Open Circuit Inductance (OCL) test condition: 500KHz , 0.25Vrms , 0A DC at 25°C.
2. L @ Isat and L @ Irms Test condition: 500KHz , 0.25Vrm (Ta=25°C).
3. The nominal DCR is measured from point "a" to point "b" as shown above in the mechanical drawing (Ta=25°C).
4. Isat1, Isat2 & Isat3: DC current that will cause inductance to drop approximately by 20%.
5. Irms: DC current for an approximate temperature rise of 40°C without core loss.
6. Derating is necessary for AC currents. Verify and check PCB pad layout, trace thickness, width, air-flow and proximity of other heat generating components as it will have an effect on the temperature rise.
7. It is recommended that the part temperature should not exceed 130° C under worst operating conditions.

● New York 1 914 347 2474 ● Taipei 886 2 2698 8669 ● Kaohsiung 886 7 350 2275
 ● Japan 81 568 85 2830 ● Shenzhen 86 755 8418 6263 ● Shanghai 86 21 5424 5141 ● Hong Kong 852 9688 9767
 ● sales@ITG-Electronics.com ● www.ITG-Electronics.com Revision E.2: January 19, 2021





*Due to continuous product improvement, all specifications are subject to change without prior notice. Kindly contact an ITG field application engineer or a sales representative prior to purchase.



AH3740 Series



4. Inductance Characteristics of AH3740 Series (Inductance vs Current):

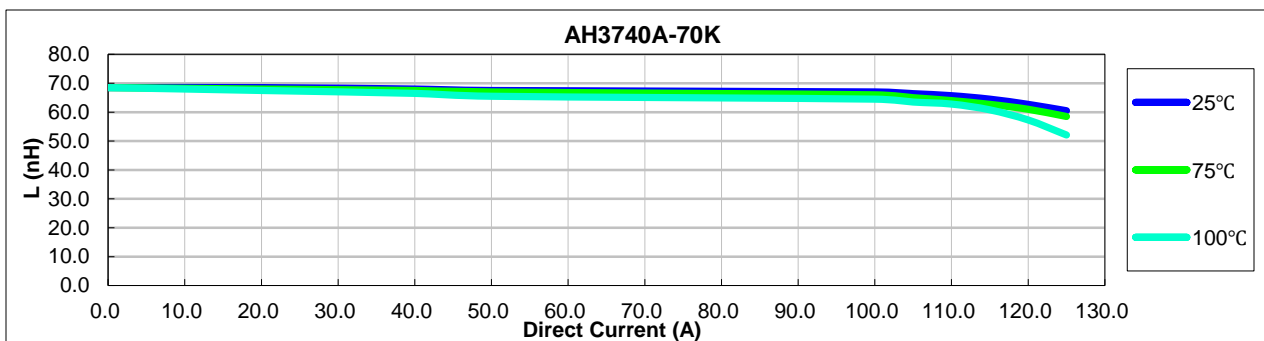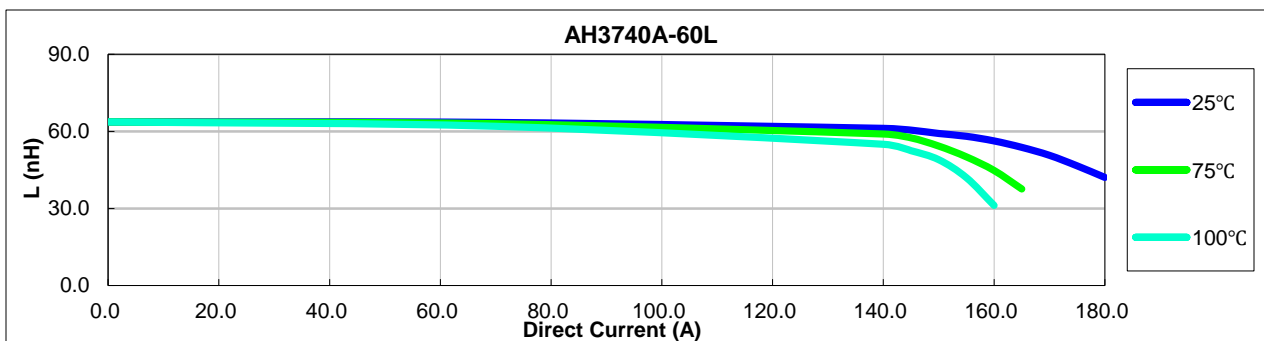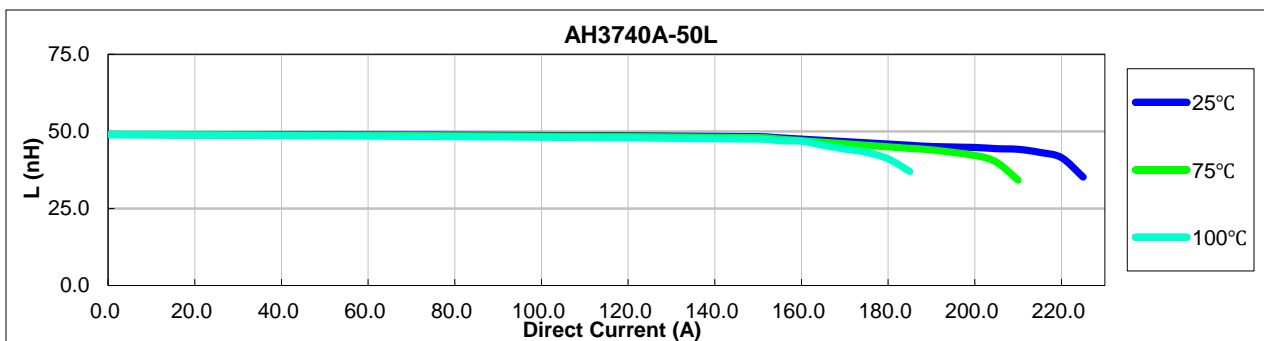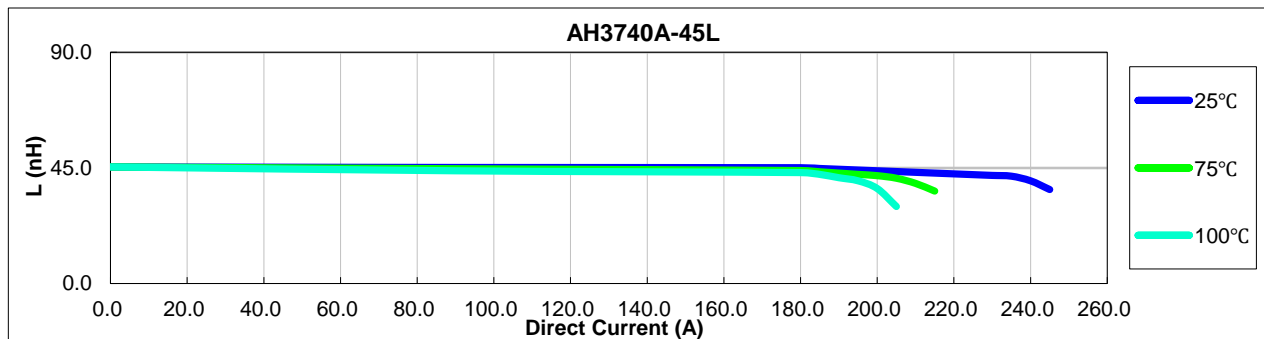





*Due to continuous product improvement, all specifications are subject to change without prior notice. Kindly contact an ITG field application engineer or a sales representative prior to purchase.



AH3740 Series



4. Inductance Characteristics of AH3740 Series (Inductance vs Current):

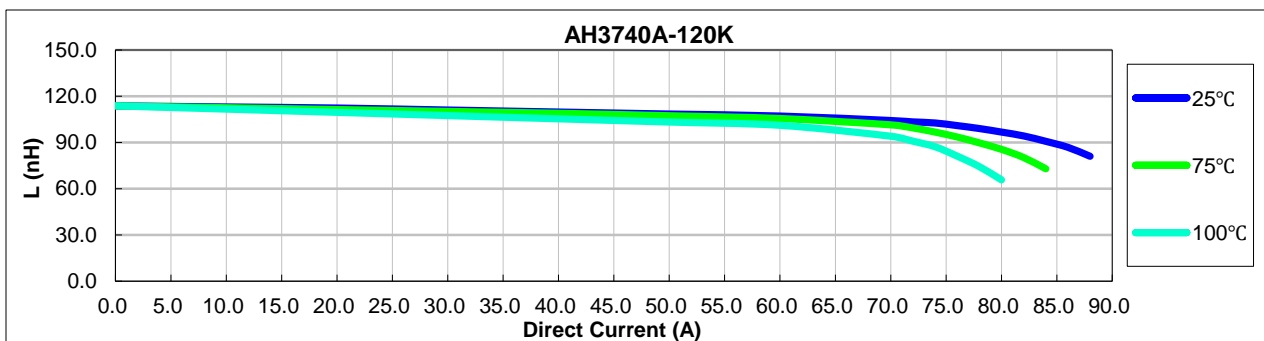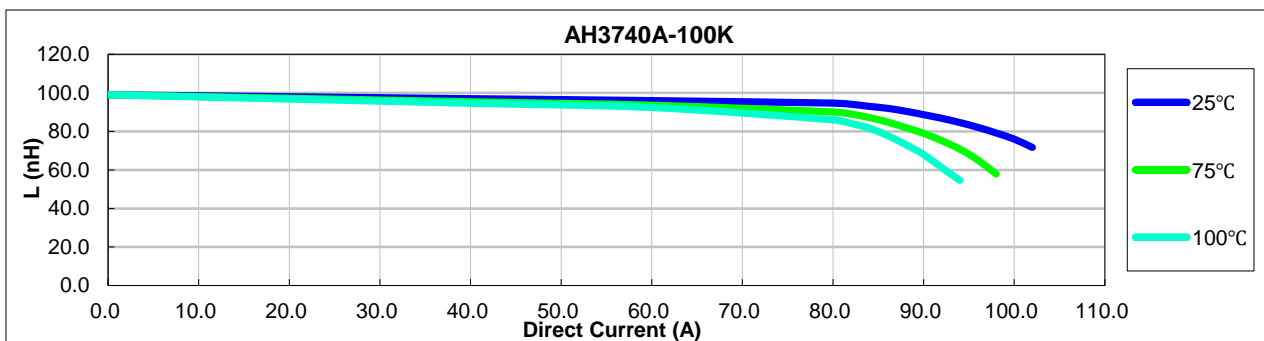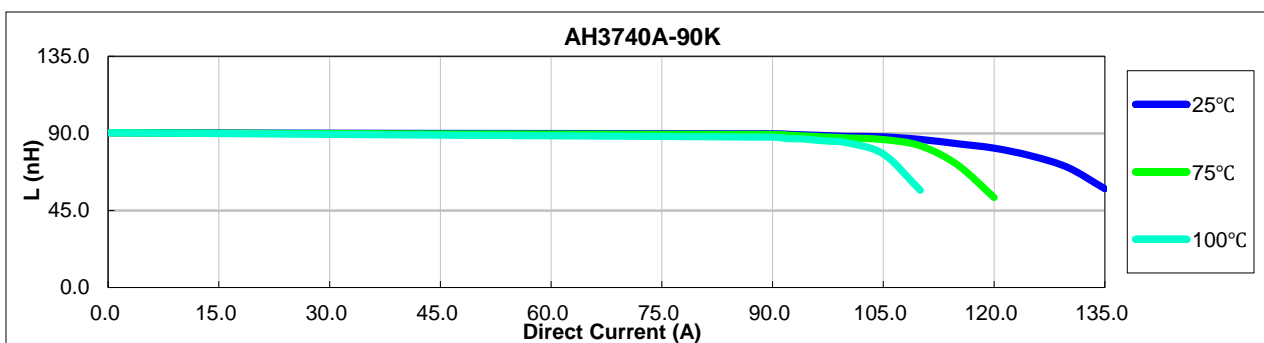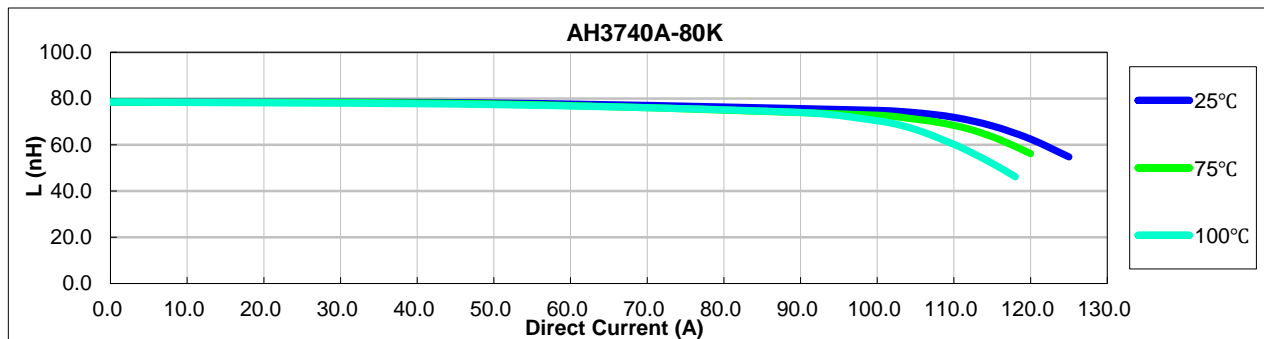





*Due to continuous product improvement, all specifications are subject to change without prior notice. Kindly contact an ITG field application engineer or a sales representative prior to purchase.



AH3740 Series



4. Inductance Characteristics of AH3740 Series (Inductance vs Current):

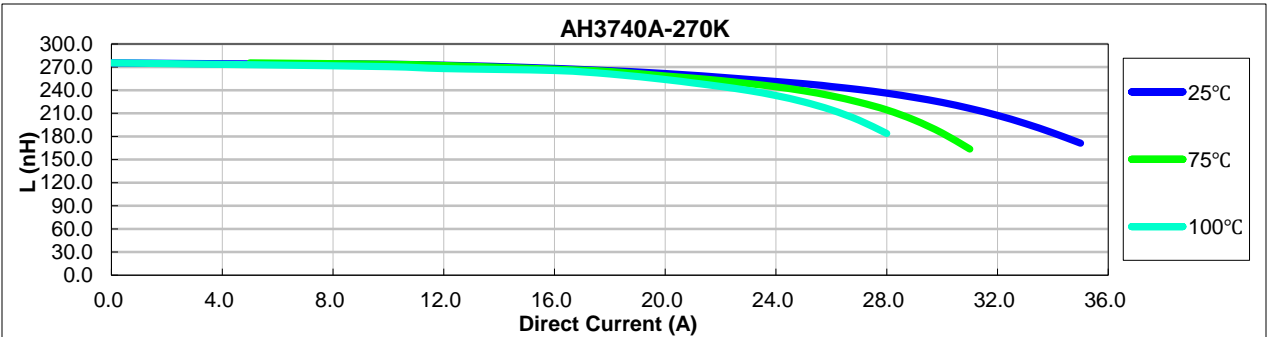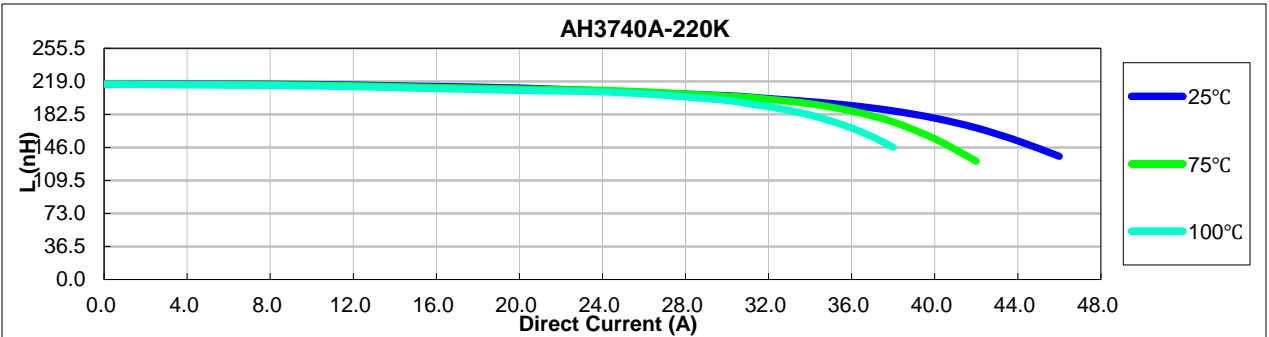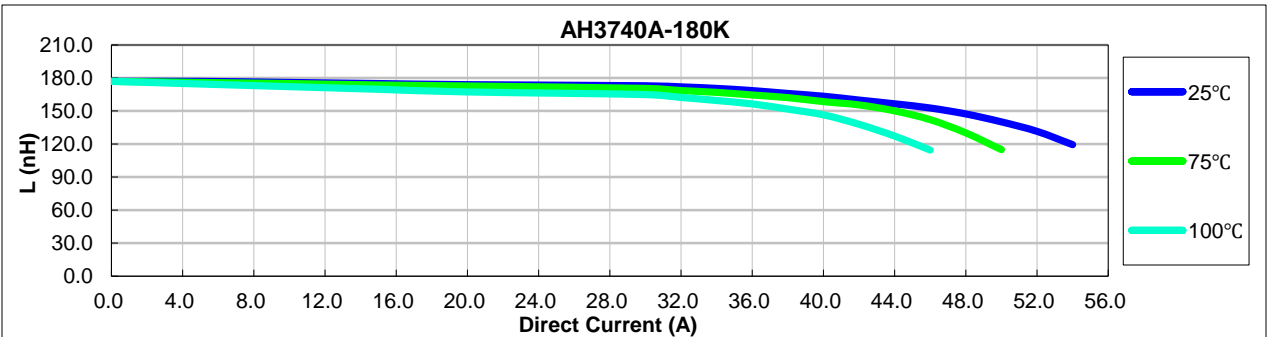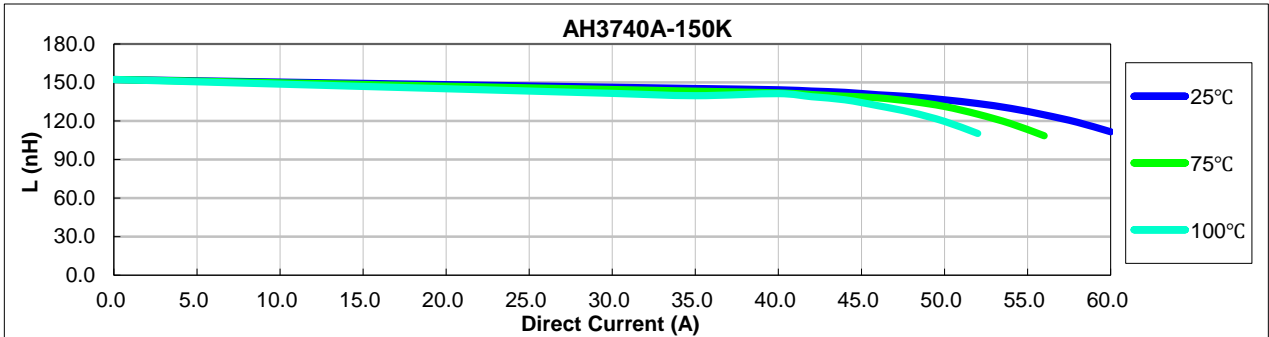

● New York 1 914 347 2474 ● Taipei 886 2 2698 8669 ● Kaohsiung 886 7 350 2275
● Japan 81 568 85 2830 ● Shenzhen 86 755 8418 6263 ● Shanghai 86 21 5424 5141 ● Hong Kong 852 9688 9767
● sales@ITG-Electronics.com ● www.ITG-Electronics.com Revision E.2: January 19, 2021



*Due to continuous product improvement, all specifications are subject to change without prior notice. Kindly contact an ITG field application engineer or a sales representative prior to purchase.



AH3740 Series



4. Inductance Characteristics of AH3740 Series (Inductance vs Current):

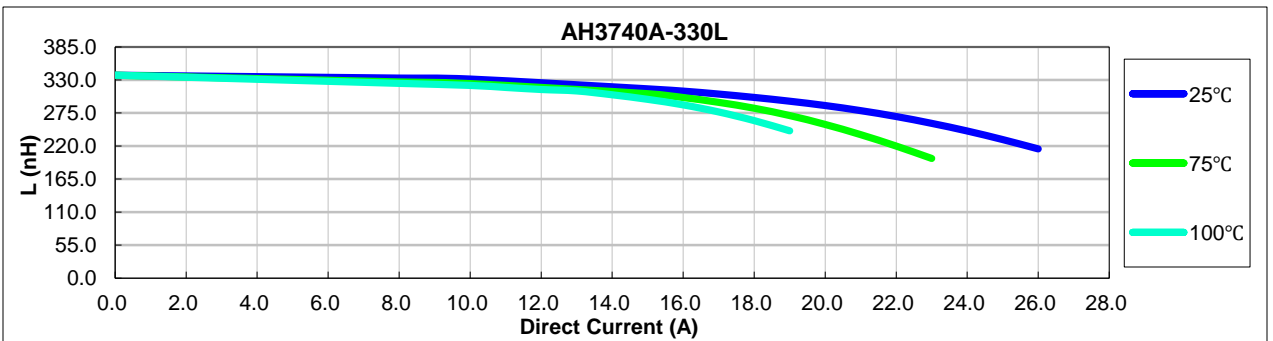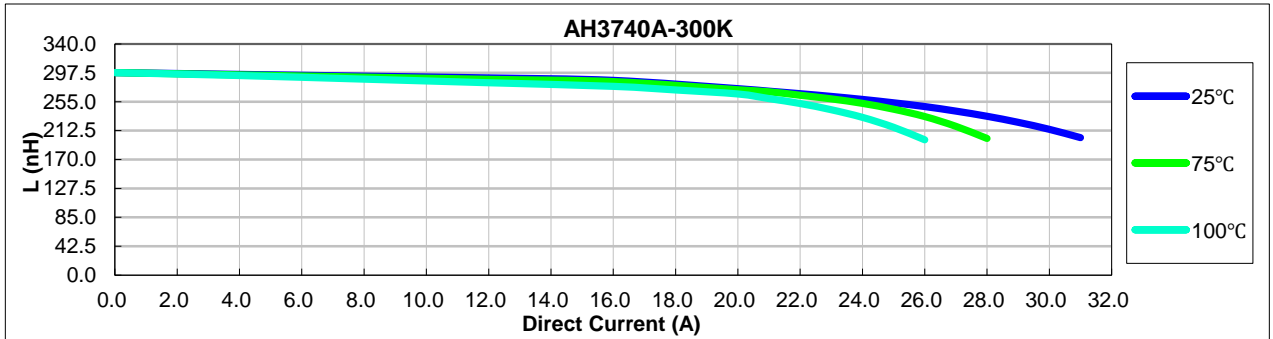







Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View AH3740A-100K on WIN SOURCE](#)

 [ITG Electronics, Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management