



**THE DATASHEET OF
P0K1.202.3K.A.010**





P0K1.202.3K.A.010


Platinum sensor with wires

For low to medium temperatures

Benefits & Characteristics

- Excellent long-term stability
- Low self-heating
- Optimal price/performance ratio


Illustration¹⁾

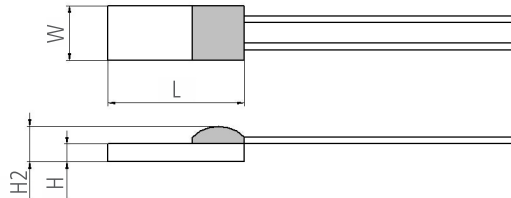

Technical Data

Operating temperature range:	-200 °C to +300 °C	
Nominal resistance:	100 Ω at 0 °C	
Characteristics curve:	3850 ppm/K	
Long-term stability:	< 0.04 % at 1000 h at maximal operating temperature	
Tolerance class (dependent on temperature range):	IEC 60751 F0.15	A (IST AG reference)
Connection:	Ni-wire Au-coated, Ø 0.2 mm, 10 mm long	
Dimensions:	2 x 2 x 0.65 / 1.3 (L x W x H / H2 in mm)	
Tolerance (chip):	L ±0.2 mm, W ±0.2 mm, H ±0.1 mm, H2 ±0.3 mm	

Product Photo

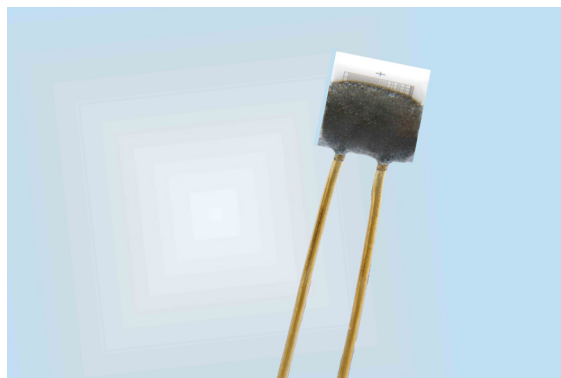



Order Information

Description:	Item number:	Former main reference:
POK1.202.3K.A.010	101156	010.02600

Additional Documents

Application Note:	Document name:
	ATP_E



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View P0K1.202.3K.A.010 on WIN SOURCE](#)
- [Innovative Power Products, Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management