



**THE DATASHEET OF
R114426000W**




SMB / SMB Lock / SMC series

R114 / R115 / R116 / R117 / R112

RADIALL 
The next conneXion

	Pages
SMB	
Introduction	7-4 to 7-5
Interface	7-6
Characteristics	7-7 to 7-8
Plugs	7-8 to 7-9
Jacks	7-10
Bulkhead jacks	7-11
Receptacles	7-12 to 7-13
PCB receptacles	7-14
Adapters	7-15
SMB LOCK	
Introduction	7-16
Interface	7-16
Characteristics	7-17
Plugs	7-17
SMB Limited detent (SMB-A)	
Receptacles	7-18
SMB Slide-on (SUBGLIS)	
Plugs	7-19
Receptacles	7-19
Panel drilling	7-20
Assembly instructions	7-20
SMC	
Introduction	7-21
Interface	7-21
Characteristics	7-22
Plugs	7-23
Jacks	7-23 to 7-24
Receptacles	7-24 to 7-25
Panel drilling	7-25

INTRODUCTION

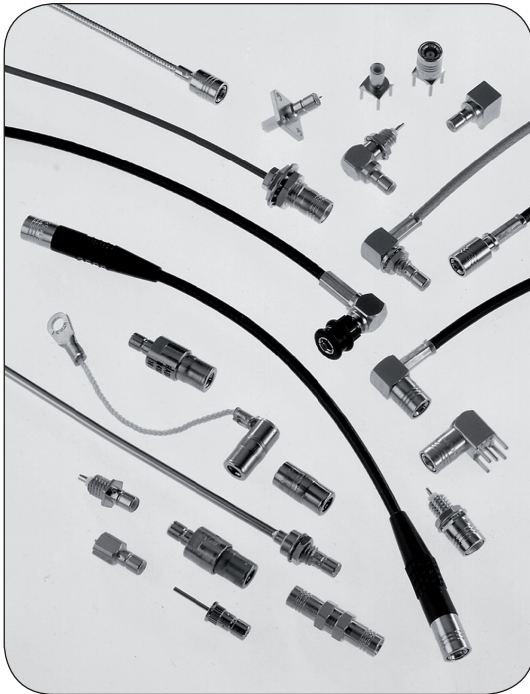

50Ω

DC - 4 GHz

GENERAL


- Subminiature coaxial connectors
- Snap-on coupling
- Plugs have female contacts
- Jacks have male contacts
- Low weight and reduced outline dimensions
- Captive contact (except contrary specification)

APPLICABLE STANDARDS

- SMB series MIL-C-39012
MIL-C-39012/67-72
- IEC 169-10
- CECC 22130
- BS 9210 N0007

APPLICATIONS

- Mobile communication systems
- Civil and military telecommunications
- Aeronautics
- Automotive

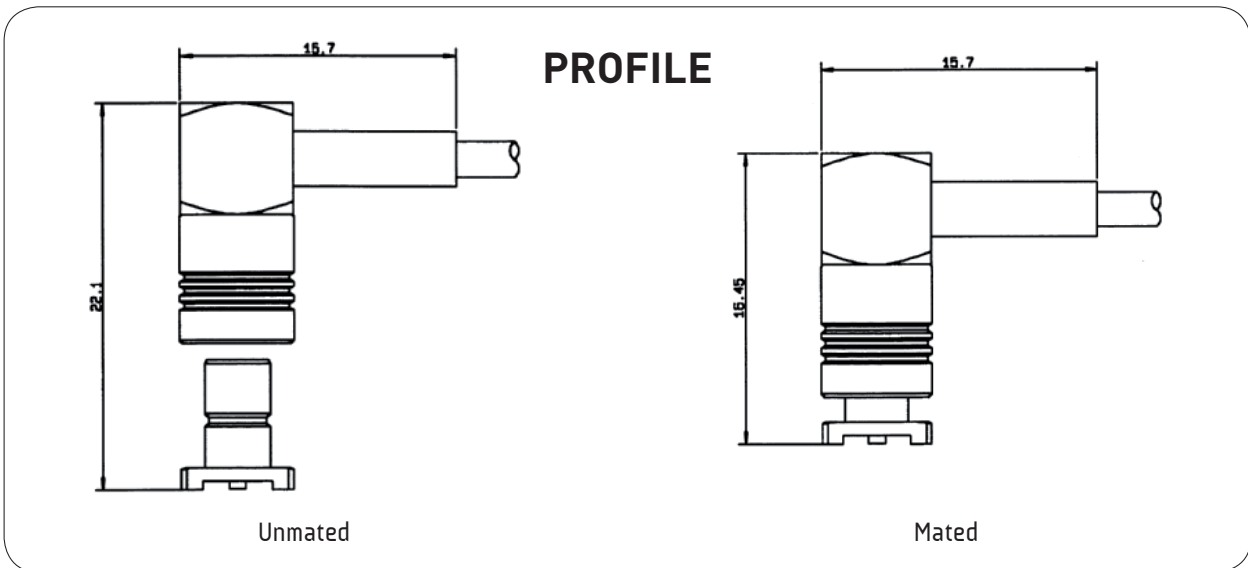

The SMB snap-on subminiature coaxial connectors provide a fast and reliable connection for high density packaging for applications up to 4 GHz.

Radiall offers a very large range of SMB connectors, including cable plugs and jacks with bulkhead and panel mount configurations, bulkhead and panel mount receptacles; through hole, SMT and edge card receptacles and in-series and between series adapters.

The SMB series also features versions with lower mating forces than standard. Four types of interconnection mechanisms are available:

- **SMB: standard** snap-on connection

The design permits quick engagement and disengagement.

- **SMB limited detent (SMB-A):** snap-on connection with **low mating force**

The design permits quick engagement and disengagement and is suitable for printed circuit boards. Radiall offers a range of PCB and bulkhead receptacles with female center contact.

The SMB-A receptacles are completely intermateable with standard SMB jacks.


- **SMB slide-on (SUBGLIS):** slide-on connection

The design is suitable for back plane and blind mate applications. In this case, we recommend the association of a mobile connector (floating jack / receptacle) with a fixed connector (panel plug / jack, receptacle).

The SUBGLIS connectors are completely intermateable with standard SMB and SMB-A connectors and for that, they can be used for test applications.



- **SMB Lock:**

Plugs (with female center contact) have a coupling nut allowing a reliable lock-on connection (50 N min). This range allows a visual control of the locking system.

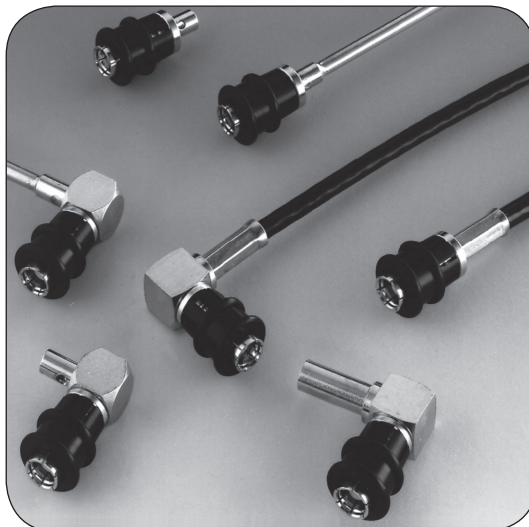

These four types of SMB connectors have the same electrical performances.

INTERFACE

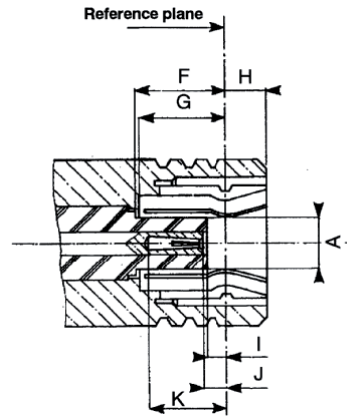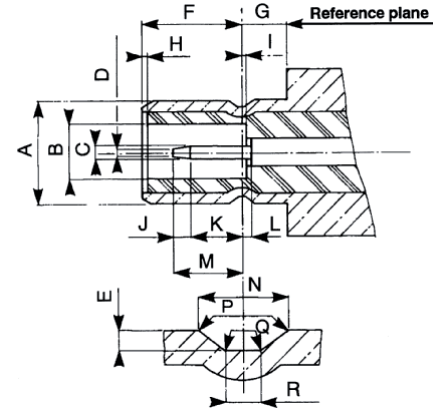PLUG (with female contact)**JACK** (with male contact)

Letter	mm		inch	
	min.	max.	min.	max.
A DIA		2.06		.081
F	3.58		.141	
G	3.58		.141	
H		1.63		.064
I	0.18		.007	
J	0.18	0.94	.007	.037
K	2.97		.117	

Letter	mm		inch	
	min.	max.	min.	max.
A DIA		3.71		.146
B DIA	2.08		.082	
C DIA	0.48	0.53	.019	.021
D DIA		0.25		.010
E	0.15	0.25	.006	.010
F	3.33	3.58	.131	.141
G	1.65		.065	
I		0.18		.007
J	0.25		.010	
K	1.32		.052	
L		0.18		.007
M		2.97		.117
N	0.69	0.94	.027	.037
P	0.05	0.15	.002	.006
Q		0.13		.005
R	0.28	0.38	.011	.015

CLAMP TYPE CONNECTORS: R 114 xxx 000 = braid retention with cylindrical gasket

R 114 xxx 133 = braid retention with V groove gasket

Test/characteristics	MIL-C-39012 A	Values/remarks
----------------------	---------------	----------------

ELECTRICAL CHARACTERISTICS

Impedance	50Ω				
Frequency range	DC - 4 GHz				
V.S.W.R. (typ.)	Frequency	3-14	1 GHz	2.5 GHz	4 GHz
Straight models	cable group: .085"	2	1.12	1.22	1.33
			2.6	1.10	1.22
Right angle models	.085"	2	1.12	1.22	1.35
			1.10	1.18	1.26
			1.10	1.20	1.25
Insertion loss (typ.) dB		3-27			
Straight models	cable group: .085"	2	0.05	0.07	0.15
			2.6	0.10	0.25
Right angle models	.085"	2	0.05	0.05	0.05
			0.05	0.07	0.12
RF leakage		3-26	-55 dB min from 2 to 3 GHz		
Insulation resistance		3-11	1000 MΩ min		
Contact resistance		3-16	Initial	After test	
• center contact (mΩ)			6	8	
• outer contact (mΩ)			1	1.5	
Working voltage					
• cable group			2/50	2.6/50	
• at sea level			250 V rms	335 V rms	
• at 70000 ft (21000 m)			60 V rms	85 V rms	
Dielectric withstanding voltage		3-17			
• cable group			2/50	2.6/50	
• at sea level			750 V rms	1000 V rms	
• at 70000 ft (21000 m)			185 V rms	250 V rms	
RF withstanding voltage (5 MHz sine wave)		3-23			
• cable group			2/50	2.6/50	
• at sea level			500 V rms	700 V rms	

MECHANICAL CHARACTERISTICS

Durability	3-15	500 matings	
Mating / unmating	3-5-1	Axial force: 62 N max (14 Lbf)	
Cabling retention force	cable group: • 2/50 • 2.6/50	3-24	58 N (13Lbf) 110 N (25Lbf)
Center contact retention			Axial: 10 N (2.25 Lbf)

ENVIRONMENTAL CHARACTERISTICS

Temperature range			-65°C / +165°C
standard models			-65°C / +165°C
hermetic sealed models			-65°C / +105°C
models for semi-rigid cables			
Combined climate tests			MIL-STD-202, method 102, condition C
Thermal shock	3-20		MIL-STD-202, method 107, condition B
High temperature endurance			MIL-STD-202, method 108
Corrosion (salt spray)	3-13		MIL-STD-202, method 101, condition B, 5%
Vibrations	3-18		MIL-STD-202, method 204, condition B, 15g
Shocks	3-19		MIL-STD-202, method 213, condition B, 75g
Low pressure	3-22		MIL-STD-202, method 105, condition C
Hermetic seal			Applied vacuum 10 ⁻⁶ mm of Hg (Torrs) Leakage rate < 10 ⁻⁶ atm/cm ² /s

MATERIALS AND PLATING


	Material	Plating
Body and center pin contact	Half hard brass as per QQ-B-626	Gold or nickel (Body)
Center socket contact	Beryllium copper as per QQ-C-530	Gold (Center contact)
Ferrules	Brass	
Insulators	PTFE teflon	
Gaskets	Silicone elastomer	

Standard packaging: 100 pieces.

All dimensions are given in mm

CHARACTERISTICS

POWER RATING

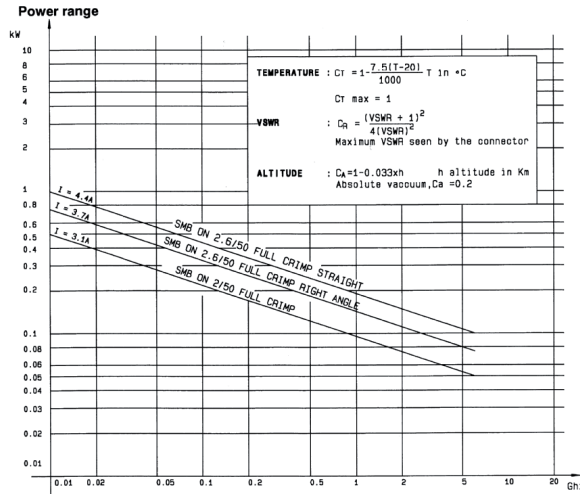

PLUGS

STRAIGHT PLUGS CRIMP TYPE FOR FLEXIBLE CABLES




Fig. 1




Fig. 2

Cable group	Cable group dia.	Part number	Fig	Dimensions mm				Captive center contact	Finish	Note
				A	B	C	D			
RG178/RG196	2/50/S	R114 073 000	1		2.55	0.95	5	yes	Gold	full crimp
RG174/RG316/RG179	2.6/50+75/S	R114 075 000								
		R114 082 000	2	19.8	3.25	1.7				
RD316	2.6/50/D	R114 083 000			18.8					

STRAIGHT PLUGS

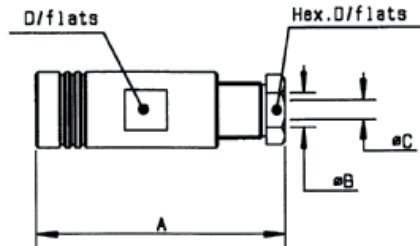


Fig. 1




Fig. 2

Cable group	Cable group dia.	Part number	Fig	Dimensions mm				Captive center contact	Finish	Note
				A	B	C	D			
RG178/RG196	2/50/S	R114 003 000	1	21.8	2.2	0.95	5	yes	Gold	clamp type for flexible cable
RG174/RG316/RG179	2.6/50+75/S	R114 005 000								
RG405	.085"	R114 053 000	2					no		solder type for semi rigid cable

RIGHT ANGLE PLUGS CRIMP TYPE FOR FLEXIBLE CABLES





Fig. 1




Fig. 2

Cable group	Cable group dia.	Part number	Fig	Dimensions mm				Captive center contact	Finish	Note
				A	B	C	D			
RG178/RG196	2/50/S	R114 183 000	1	13.8	15.7	2.55	0.95	yes	Gold	
RG174/RG316/RG179	2.6/50+75/S	R114 185 000	2							short version
		R114 186 000	1	13.8	15.7	3.25	1.7			
		R114 186 100			15.3		1.72			
		R114 187 000		15.1	15.7		1.7			
RD316	2.6/50/D	R114 182 000		13.8						
BT3002	3.6/75/D	R114 191 300		13.7	18.3	4.4	2.1			

RIGHT ANGLE PLUGS

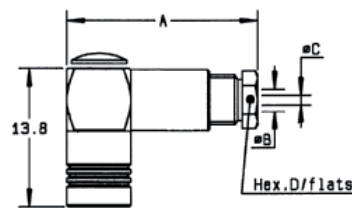


Fig. 1




Fig. 2

Cable group	Cable group dia.	Part number	Fig	Dimensions mm				Captive center contact	Finish	Note
				A	B	C	D			
RG178/RG196	2/50/S	R114 163 000	1	19	2.2	1	5	yes	Gold	clamp type for flexible cables
	2.2/50/D	R114 163 420		16.7	2.5		6			
RG174/RG316/RG179	2.6/50+75/S	R114 165 000		19	3	1.7	5			cable bending required solder type for semi rigid cable
RG405	.085"	R114 169 000	2							

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box. **Bold** part numbers represent products typically in stock & available for immediate shipment. See page 8 and 9 for packaging information.

JACKS

STRAIGHT JACKS CRIMP TYPE FOR FLEXIBLE CABLES

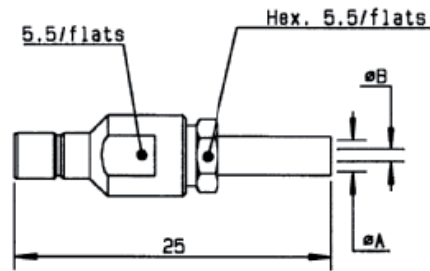


Fig. 1





Fig. 2

Cable group	Cable group dia.	Part number	Fig	Dimensions mm			Captive center contact	Finish	Note
				A	B	C			
RG178/RG196	2/50/S	R114 237 000	1	2.55	0.95		yes	Gold	
RG174/RG316/RG179	2.6/50+75/S	R114 238 000	2						full crimp
		R114 239 000	1	3.25	1.7				

STRAIGHT JACKS CLAMP TYPE FOR FLEXIBLE CABLES

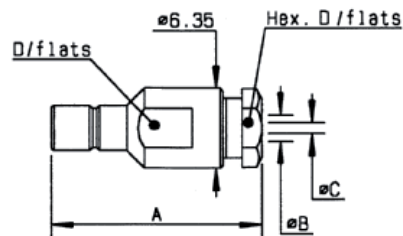

Cable group	Cable group dia.	Part number	Dimensions mm				Captive center contact	Finish
			A	B	C	D		
RG178/RG196	2/50/S	R114 203 000	21	2.2	1	5	yes	Gold
RG174/RG316/RG179	2.6/50+75/S	R114 205 000		3	1.7			

STRAIGHT BULKHEAD JACKS CRIMP TYPE FOR FLEXIBLE CABLES

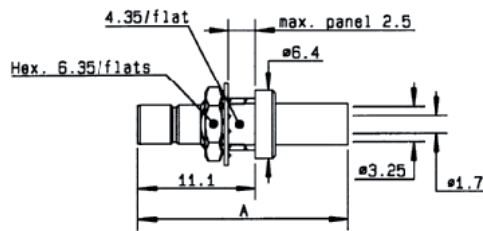


Fig. 1

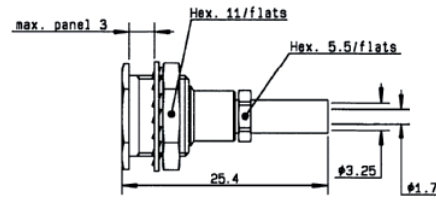


Fig. 2

Cable group	Cable group dia.	Part number	Fig	Dimensions mm		Captive center contact	Panel drilling	Finish	Note
				A	B				
RG174/RG316/RG179	2.6/50+75/S	R114 313 000	1	22		yes	P08	Gold	back mount/full crimp
		R114 316 000	2				P07		recessed/front mount

STRAIGHT BULKHEAD JACKS CLAMP TYPE FOR FLEXIBLE CABLES

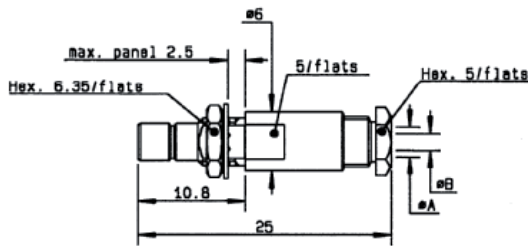


Fig. 1


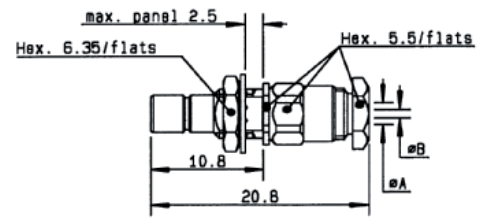


Fig. 2

Cable group	Cable group dia.	Part number	Fig	Dimensions mm		Captive center contact	Panel drilling	Finish	Note
				A	B				
RG178/RG196	2/50/S	R114 303 000	1	2.2	1	yes	P08	Gold	
		R114 303 133	2						conical braid clamp
RG174/RG316/RG179	2.6/50+75/S	R114 305 000	1	3	1.7				

STRAIGHT BULKHEAD JACK SOLDER TYPE FOR SEMI-RIGID CABLE



Cable group	Cable group dia.	Part number	Captive center contact	Panel drilling	Finish
RG405	.085"	R114 222 000	yes	P08	Gold

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box. **Bold** part numbers represent products typically in stock & available for immediate shipment. See page 8 and 9 for packaging information.

RECEPTACLES

STRAIGHT FLANGE RECEPTACLES (male center contact)

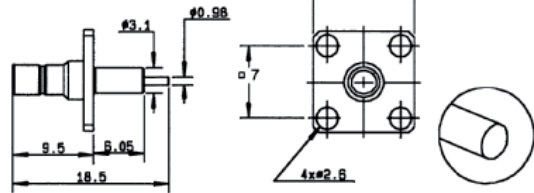



Fig. 1

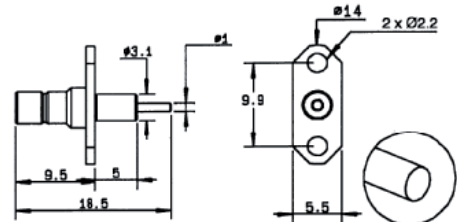


Fig. 2

Part number	Fig	Captive center contact	Panel drilling	Finish	Note
R114 413 000	1	no	P01	Gold	square flange / extended dielectric
R114 450 000	2		P06		2 hole flange / extended dielectric / unit packaging

STRAIGHT BULKHEAD RECEPTACLES (male center contact)

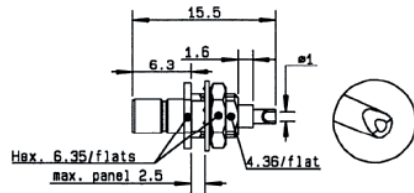


Fig. 1

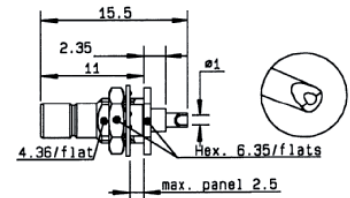


Fig. 2


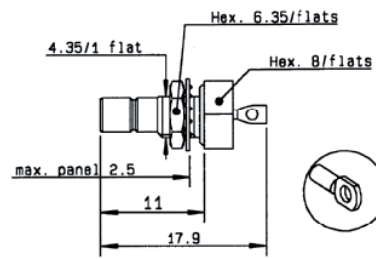


Fig. 3


Part number	Fig	Captive center contact	Panel drilling	Finish	Note
R114 553 000	1	yes	P08	Gold	front mount
R114 554 000	2				rear mount
R114 603 000	3				hermetically sealed

STRAIGHT PRESS IN RECEPTACLE (male)




Part number	Captive center contact	Panel drilling	Finish
R114 504 225	yes	P10	Nickel

RIGHT ANGLE BULKHEAD RECEPTACLES (male center contact)

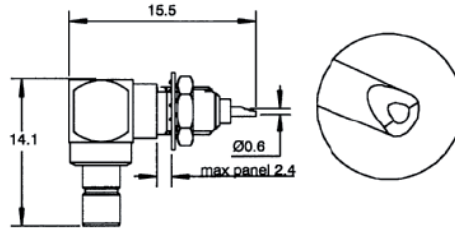

Part number	Captive center contact	Panel drilling	Finish
R114 670 000	yes	P08	Gold

STRAIGHT PCB RECEPTACLES

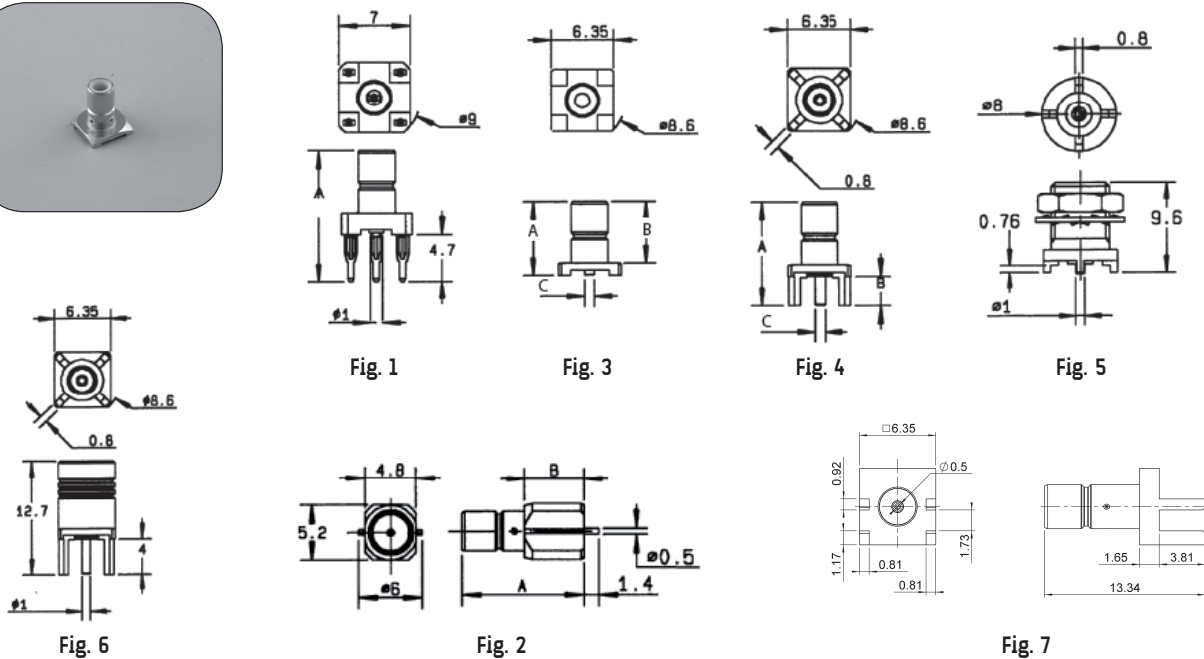

Part number	Fig	Dimensions mm			Captive center contact	Assembly instructions	Panel drilling	Finish	Note
		A	B	C					
R114 416 000	1	12.1			yes		P02	Gold	press fit pins
R114 416 020		12.85						Nickel	
R114 423 000	2	11.5	5.5			M01	Gold	SMT edge card	
R114 423 120		7						SMT	
R114 424 000	3	7.4	6.15	0.96		M01		SMT / packaging 100 reel	
R114 424 100		7.4	6.15	0.96		M01		SMT / packaging 500 reel	
R114 424 120		7.4	6.15	0.96					
R114 425 000	6							P05	female
R114 426 000	4	11.4	4	0.8				P03	
R114 560 200	5							P05	rear mount

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.
Bold part numbers represent products typically in stock & available for immediate shipment.
 See page 8 and 9 for packaging information.

PCB RECEPTACLES

RIGHT ANGLE PCB RECEPTACLES (male center contact)

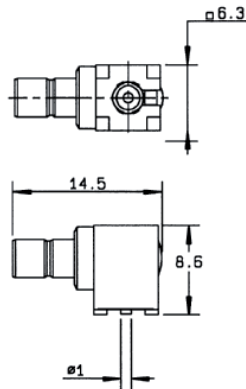



Fig. 1

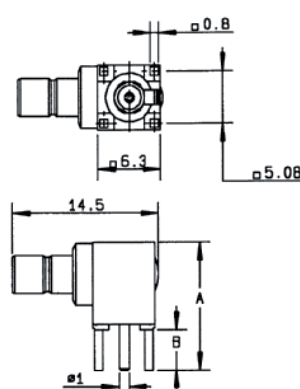


Fig. 2

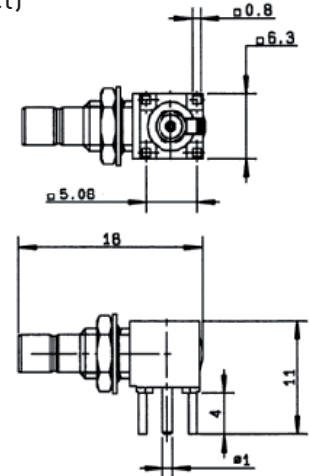


Fig. 3

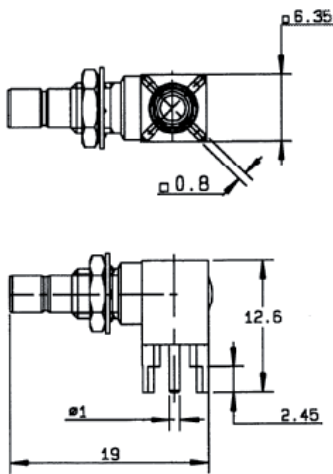


Fig. 4




Fig. 5

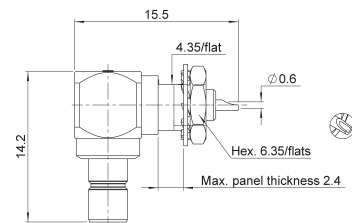


Fig. 6




Fig. 7

Part number	Fig	Dimensions mm		Captive center contact	Assembly instructions	Panel drilling	Finish	Note
		A	B					
R114 664 000	1			yes	M01	Gold	SMT / packaging 100p reel	
R114 664 120							SMT / packaging 500p reel	
R114 665 000	2	12.6	4		yes	P03	Nickel	packaging unit rear mount
R114 665 020								
R114 673 020	3					P08	Gold	packaging 400 pieces
R114 673 120	4							packaging 100 pieces
R114 665 420	5					P09	Gold	packaging 200 pieces
R114 670 000	6							
R114 673 823	7							

IN SERIES ADAPTERS




Fig. 1




Fig. 2

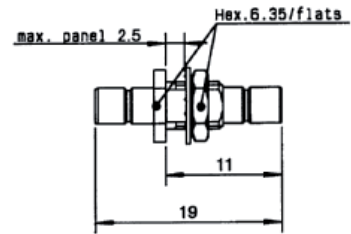


Fig. 3




Fig. 4




Fig. 5




Fig. 6

Part number	Fig	Captive center contact	Panel drilling	Finish	Note
R114 703 000	1	yes	P08	Gold	male - male
R114 704 000	2				female - female
R114 720 000	3				bulkhead male - male
R114 753 000	4				hermetically sealed male - male
R114 780 000	5				tee female / male - male
R114 781 000	6				tee male / male - male

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box. **Bold** part numbers represent products typically in stock & available for immediate shipment. See page 8 and 9 for packaging information.

INTRODUCTION




RADIALL proposes new **SMB LOCK** plugs with a 2 step connection system:

- 1 **Snap** the plug on the male connector (fig. 1),
- 2 **Lock** the couple by pushing down the coupling nut (fig. 2).

This new range

- is **totally intermateable** with the standard SMB male connectors,
- benefits from a low intermodulation,
- replace the standard SMB and screw-on connectors in all applications requiring:
 - a fast connection
 - a reliable lock-on connection
 - long durability

- Possibility to visually control the locking system.

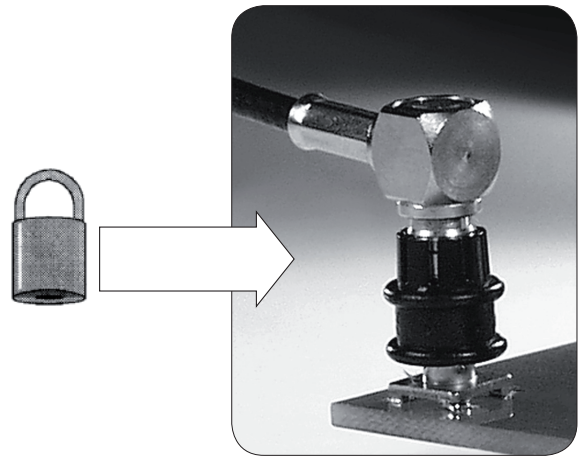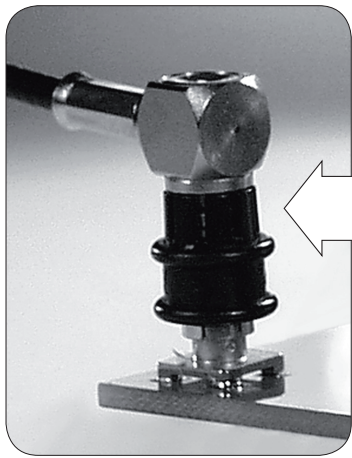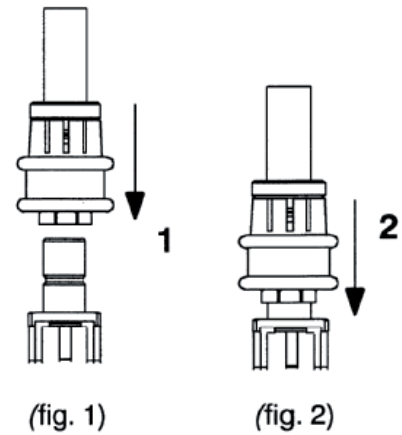


- The connector allows a 360° cable rotation.
- Coupling nut.

The coupling nut is made with POM (halogen free). Its standard color is black.

INTERFACE

PLUG (with female contact)

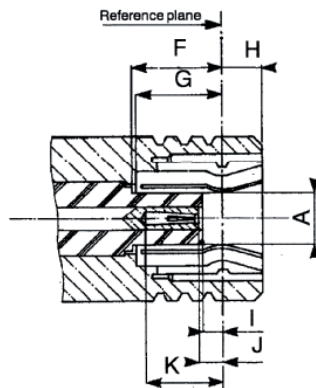

Letter	mm		inch	
	min.	max.	min.	max.
A DIA		2.06		.081
F	3.58		.141	
G	3.58		.141	
H		1.63		.064
I	0.18		.007	
J	0.18	0.94	.007	.037
K	2.97		.117	

CHARACTERISTICS

SMB LOCK

Test/characteristics	Values/remarks
----------------------	----------------

ELECTRICAL CHARACTERISTICS

Impedance	50Ω		
Operating frequency	DC to 4 GHz		
Typical V.S.W.R.	2 GHz	4 GHz	
Straight models	.085" ∅ 2.6/50	1.15	1.20
Right angle models	.085" ∅ 2.6/50	1.05	1.15
RF Insertion loss	0.20VF (GHz)		
Straight models	.085" ∅ 2.6/50	0.25VF (GHz)	
Right angle models	.085" ∅ 2.6/50	0.25VF (GHz)	
Testing voltage (V RMS)	.085" ∅ 2.6/50	750	
Working voltage (V RMS)	.085" ∅ 2.6/50	335	
Insulation resistance (MΩ)	1000		

MECHANICAL CHARACTERISTICS

Life	500 matings min		
Cable retention force	.085" ∅ 2.6/50 ∅ 5/50/S	220 N 110 N 110 N	
Coupling nut retention force	50 N min		
Vibrations	MIL STD 202 F method 240D, condition B		

ENVIRONMENTAL CHARACTERISTICS

Temperature range	-35°C / + 125°C
-------------------	-----------------


MATERIALS AND PLATING

	Material	Plating
Bodies	Brass	BBR
Center contact	Beryllium copper	Gold
Outer contact	Bronze	
Insulator	PTFE	
Coupling nut	POM (halogen free)	

Standard packaging: 100 pieces. For unit packaging, add "W" after the P/N


PLUGS

STRAIGHT PLUG FULL CRIMP TYPE FOR FLEXIBLE CABLES



Cable group	Cable group dia	Part number	Dimensions A (mm)	Captive center contact
RG174/RG188/RG316	2.6/50/S	R117 082 807	3.25	yes

RIGHT ANGLE PLUG CRIMP TYPE FOR FLEXIBLE CABLES



Cable group	Cable group dia	Part number	Dimensions A (mm)	Captive center contact
RG174/RG188/RG316	2.6/50/S	R117 186 807	3.25	yes

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.
Bold part numbers represent products typically in stock & available for immediate shipment.
 See page 8 and 9 for packaging information.


7-17

RECEPTACLES

- Lower mating/unmating force (from 2.5 N to 6N).
- Receptacles intermateable with SMB connectors.
- Gold finish.



The SMB limited detent connectors have the same electrical characteristics as standard SMB connectors.

BULKHEAD PLUG RECEPTACLE (rear fixing)





Part number	Panel drilling	Finish
R115 556 000	P08	Gold

STRAIGHT PCB RECEPTACLES (female center contact)



Part number	Fig	Captive center contact	Panel drilling	Finish	Packaging
R115 427 000	1	yes	P05	Gold	Unit

RIGHT ANGLE PCB RECEPTACLE (female center contact)



Part number	Captive center contact	Panel drilling	Finish	Packaging
R115 666 000	yes	P04	Gold	Unit

PLUGS AND RECEPTACLES

SMB Slide-on (SUBGLIS)

Slide on connectors (mating/unmating force: 2.2 N to 4.9 N).

The SMB slide-on connectors are completely intermateable with standard SMB and SMB limited detent connectors and in this regard, they can be used for **test applications**.

The SMB slide-on connectors have the same electrical characteristics as standard SMB connectors.

STRAIGHT BULKHEAD PLUGS

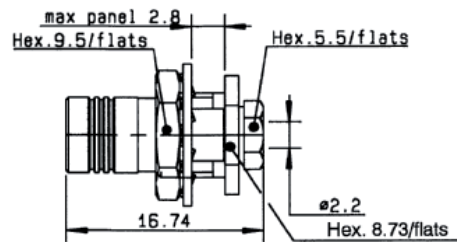



Fig. 1




Fig. 2

Cable group	Cable group dia	Part number	Fig	Captive center contact	Panel drilling	Finish	Packaging	Note
RG178/RG196	2/50/S	R116 003 900	1	yes	P12	Gold	Unit	clamp type for flexible cable conical braid clamp
RG405	.085"	R116 056 000	2	no	P08			solder type for semi-rigid cable

PCB RECEPTACLES





Fig. 1






Fig. 2



Part number	Fig	Captive center contact	Panel drilling	Finish	Packaging	Note
R116 426 000	1	yes	P03	Gold	unit	male center contact
R116 666 030	2		P04			female center contact

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box. **Bold** part numbers represent products typically in stock & available for immediate shipment. See page 8 and 9 for packaging information.

PANEL DRILLING

P01




MM		
	maxi	mini
A	3.3	3.2
B	2.3	2.1
C	7.05	6.95

P02



MM		
	maxi	mini
A	2.565	2.515
B	1.09	0.94
C	5.105	5.055

P03




MM		
	maxi	mini
A	1.4	1.3
B	5.13	5.03

P04




MM		
	maxi	mini
A	1.29	1.19
B	1.8	1.7
C	5.13	5.03

P05



MM		
	maxi	mini
A	2.56	2.52
B	1.5	1.4
C	5.13	5.03

P06




MM		
	maxi	mini
A	3.25	3.2
B	2.4	2.2
C	9.95	9.85

P07




MM		
	maxi	mini
A	9.7	9.6

P08




MM		
	maxi	mini
A	5	4.9
B	4.58	4.46

P09



mm		
	Maxi	mini
A	2.59	2.49
B	1.4	1.3
C	5.16	5

P10




mm		
	Maxi	mini
A	4.02	3.98


ASSEMBLY INSTRUCTIONS

M01

Part number
R114 423 000




Part number
R114 424 000
R114 424 100
R114 664 000
R114 664 120




Video shadow:


Part number
R113 423 000



Part number
R114 424 000
R114 424 100




Part number
R114 664 000
R114 664 120



Vaccum nozzle dimensions:

Part number
R114 424 000





50Ω	DC - 10 GHz
-----	-------------

GENERAL

- Subminiature coaxial connectors
- Screw-on coupling
- Plugs have female contacts
- Jacks have male contacts
- Low weight
- Reduced outline dimensions

APPLICABLE STANDARDS


- MIL-C-39012

APPLICATIONS


- Civil and military telecommunications
- Aeronautics
- Missiles
- Edge mounting applications

INTERFACE

PLUG

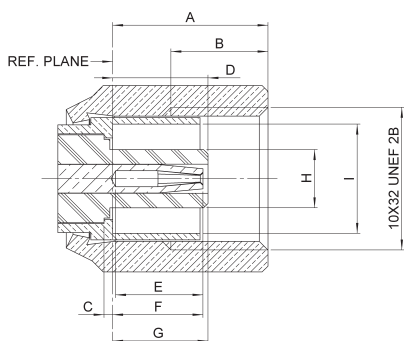

JACK



Letter	mm		inch	
	min.	max.	min.	max.
A	5.14	5.55	.202	.219
B	3.20	4.20	.126	.165
C	0.25	0.35	.010	.014
D	2.95	3.00	.116	.118
E	2.80	3.20	.110	.126
F	2.80	3.40	.110	.134
G	3.15	3.40	.124	.134
H	2.00	2.05	.079	.081
I	3.75	3.80	.148	.150

Letter	mm		inch	
	min.	max.	min.	max.
A	6.00	6.20	.236	.244
B	3.15	3.35	.124	.132
C	0.05	0.20	.002	.008
D	0.65	1.50	.026	.059
E	1.30	2.05	.051	.081
F	3.40	3.71	.134	.146
G	3.40	3.95	.134	.156
H	3.65	3.69	.144	.145
I	2.08	2.13	.082	.084
J	0.48	0.52	.019	.020
K	--	0.20	--	.008

CHARACTERISTICS

Test/characteristics	MIL-C-39012 paragraph	Values/remarks
ELECTRICAL CHARACTERISTICS		
Impedance		50Ω
Frequency range		DC - 10 GHz
V.S.W.R. (typ.)	cable	2/50
Straight	3-14	1.25 + 0.04 F (GHz)
Right angle		1.40 + 0.06 F (GHz)
		2.6/50
		1.20 + 0.04 F (GHz)
		1.30 + 0.04 F (GHz)
Insertion loss	3-27	0.25 dB max. at 4 GHz
Straight		0.5 dB max. at 4 GHz
Right angle		
RF leakage	3-26	-60 dB min between 2 and 3 GHz
Insulation resistance	3-11	1000 MΩ min
Contact resistance	3-16	Initial
• center contact (mΩ)		6
• outer contact (mΩ)		1
		After environment
		8
		1.5
Voltage rating (volts RMS)	cable	2/50
• at sea level		250 V rms
• at 70000 ft (21000 m)		60 V rms
		2.6/50
		335 V rms
		85 V rms
Dielectric withstanding voltage	cable	2/50
• at sea level	3-17	750 V rms
• at 70000 ft (21000 m)		185 V rms
		2.6/50
		1000 V rms
		250 V rms
RF high potential withstanding voltage (Frequency 5 MHz)	cable	2/50
• at sea level	3-23	500 V rms
		2.6/50
		700 V rms

MECHANICAL CHARACTERISTICS

Durability	3-15	500 matings
Force to engage and disengage	3-5-1	torque: 16 inch-ounces max - 11.3 Ncm
Mating torque		35 to 50 inch-ounces - 25 to 35 Ncm
Coupling nut proof torque		100 inch-ounces - 71 Ncm
Coupling nut retention force	3-25	35 lbs min - 156 N min
Cabling retention force	cable	2/50
	3-24	13 lbs - 58 N
		2.6/50
		25 lbs - 110 N
Contact captivation		Axial force: 4 lbs - 18 N torque: not applicable

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range		-65°C / +165°C
standard models and hermetic		-65°C / +105°C
models for semi-rigid cables		
Temperature cycling		MIL-STD-202, method 102, condition C
Thermal shock	3-20	MIL-STD-202, method 107, condition B
High temperature test		MIL-STD-202, method 108
Corrosion (salt spray)	3-13	MIL-STD-202, method 101, condition B, 5%
Vibration	3-18	MIL-STD-202, method 204, condition D, 20g
Shock	3-19	MIL-STD-202, method 213, condition C, 100g
Moisture resistance	3-21	not applicable
Barometric pressure	3-22	MIL-STD-202, method 105, condition C
Hermetic test		Down to 10 ⁻⁶ mm Hg (Torr)
		Leak rate <1 x 10 ⁻⁶ atm/cm ³ /sec

MATERIALS AND PLATING

	Material	Plating
Bodies and male contacts	Brass, half hard per QQ-B-626	Gold to satisfy the corrosion requirements (bodies)
Female contacts and interfaces	Beryllium copper per QQ-C-530	Gold (Center contact)
Ferrules	Brass	
Insulators	PTFE teflon	
Gaskets	Silicone rubber	

All dimensions are given in mm

STRAIGHT PLUGS




Fig. 1

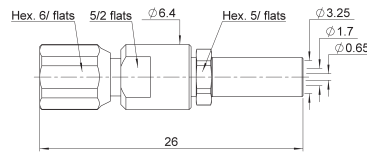


Fig. 2




Fig. 3

Cable group	Cable group dia	Part number	Fig	Dimensions mm		Note
				A dia	B dia	
RG178/RG196	2/50/S	R112 003 000	1	1	2.2	Clamp type
RG174/RG316/RG179	2.6/50+75/S	R112 005 000		1.7	3	
		R112 075 000	2			Crimp type
RG405	.085"	R112 053 000	3			Solder type

RIGHT ANGLE PLUGS




Fig. 1





Fig. 2

Cable group	Cable group dia	Part number	Fig	Dimensions mm		Note
				A dia	B dia	
RG178/RG196	2/50/S	R112 163 000	1	1	2.2	Clamp type
RG174/RG316/RG179	2.6/50+75/S	R112 165 000		1.7	3	
RG178/RG196/RD178	2/50	R112 183 000	2	0.95	2.55	Crimp type
RG174/RG316/RG179	2.6/50+75/S	R112 186 000		1.72	3.25	

STRAIGHT JACK

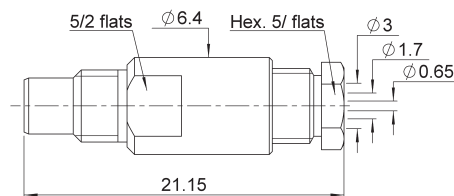


Cable group	Cable group dia	Part number	Note
RG174/RG316/RG179	2.6/50+75/S	R112 205 000	Clamp type

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.
Bold part numbers represent products typically in stock & available for immediate shipment.
 See page 8 and 9 for packaging information.

JACKS AND RECEPTACLES

BULKHEAD JACKS

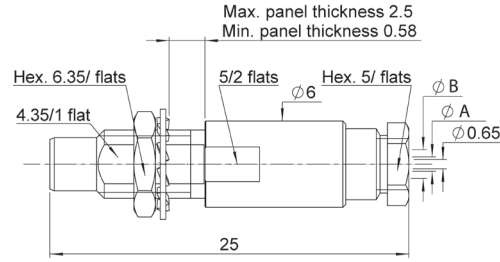

Cable group	Cable group dia	Part number	Dimensions mm		Panel drilling
			A dia	B dia	
RG178/RG196	2/50/S	R112 303 000	1	2	P04
RG174/RG316/RG179	2.6/50+75/S	R112 305 000	1.7	3	

SQUARE FLANGE RECEPTACLES

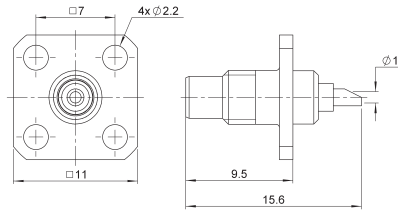


Fig. 1

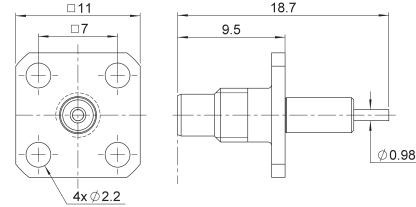


Fig. 2

Part number	Fig	Captive center contact	Panel drilling
R112 403 000	1		P01
R112 413 000	2	no + removable insulator	P02

BULKHEAD RECEPTACLES WITH SOLDER POT CONTACT




Fig. 1

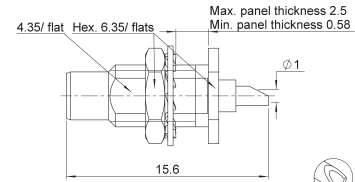


Fig. 2

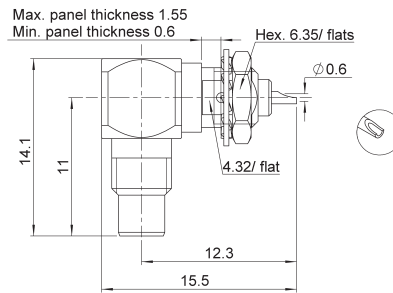


Fig. 3

Part number	Fig	Panel drilling	Note
R112 553 000	1	P04	rear nut fixing
R112 554 000	2		front nut fixing
R112 670 000	3		front mount

PCB RECEPTACLES

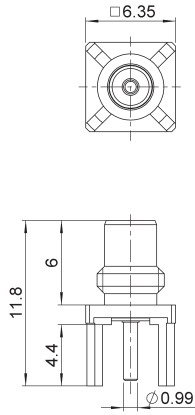



Fig. 1

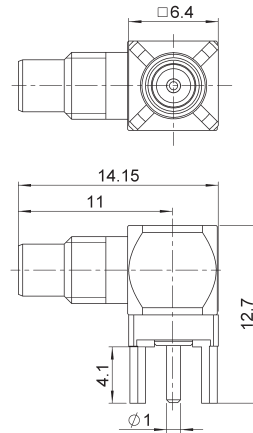


Fig. 2

Part number	Fig	Panel drilling	Note
R112 426 000	1	P03	Solder legs
R112 665 000	2		

IN SERIES ADAPTERS

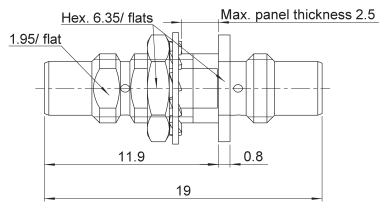


Fig. 1





Fig. 2


Part number	Fig	Panel drilling	Note
R112 720 000	1	P04	Male - male
R112 780 000	2		Tee male - male/female

PANEL DRILLING


P01




P02



P03



P04



To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.
Bold part numbers represent products typically in stock & available for immediate shipment.
 See page 8 and 9 for packaging information.

Cable designation	Cable Group	Imp. Ω	Cable dimensions mm (inch)					Radiall cable if applicable	
			Core type	Core ∅	Insulator ∅	Screen	Outer ∅	P/N	Remark
RG 174 A/U	2.6 / 50 S	50	7 x 0.16	0.48 [0.019]	1.52 [0.060]	S	2.79 [1.110]	C291 150 000	PVC jacket
RG 178 B/U	2 / 50 S	50	7 x 0.1	0.30 [0.012]	0.84 [0.033]	S	1.78 [0.070]	C291 145 007	FEP jacket
RG 178 B/U	2 / 50 S	50	7 x 0.1	0.30 [0.012]	0.84 [0.033]	S	1.83 [0.072]	C291 145 060	PVC jacket
RG 178 non m.	2 / 50 S	50	7 x 0.1	0.29 [0.011]	0.84 [0.033]	S	1.80 [0.071]	C291 140 087	non magnetic / FEP jacket
RG 179 B/U	2.6 / 75 S	75	7 x 0.1	0.30 [0.012]	1.60 [0.063]	S	2.54 [0.101]	C291 210 007	FEP jacket
RG 187 A/U	2.6 / 75 S	75	7 x 0.1	0.30 [0.012]	1.60 [0.063]	S	2.79 [1.110]	C291 211 006	PTFE jacket
RG 188 A/U	2.6 / 50 S	50	7 x 0.17	0.51 [0.020]	1.52 [0.060]	S	2.79 [1.110]	C291 160 006	PTFE jacket
RG 196 A/U	2 / 50 S	50	7 x 0.1	0.30 [0.012]	0.86 [0.034]	S	2.03 [0.080]	C291 110 006	PTFE jacket
RG 212 /U	8 / 50 D	50	solid	1.41 [0.056]	4.70 [1.851]	D	8.43 [3.311]	na	
RG 213 /U	10 / 50 S	50	7 x 0.75	2.26 [0.089]	7.24 [2.851]	S	10.30 [4.061]	C291 510 000	PVC jacket
RG 214 /U	11 / 50 D	50	7 x 0.75	2.25 [0.089]	7.24 [2.851]	D	10.80 [4.251]	C291 600 000	PVC jacket
RG 215	10 / 50 S	50	7 x 0.75	2.25 [0.089]	7.25 [2.851]	S	10.29 [4.051]	na	
RG 216 /U	11 / 75 D	75	7 x 0.4	1.21 [0.048]	7.24 [2.851]	D	10.80 [4.251]	C291 610 000	PVC jacket
RG 217 /U	14 / 50 D	50	solid	2.69 [1.061]	9.40 [3.701]	D	13.84 [5.451]	C291 620 000	PVC jacket
RG 218 /U	22 / 50 S	50	solid	4.95 [1.950]	17.27 [6.801]	S	22.10 [8.701]	C291 630 000	PVC jacket
RG 223 /U	5 / 50 D	50	solid	0.89 [0.035]	2.95 [1.161]	D	5.38 [2.121]	C291 330 000	PVC jacket
RG 225 /U	11 / 50 D	50	7 x 0.8	2.38 [0.094]	7.24 [2.851]	D	10.90 [4.291]	C291 605 007	glass fiber jacket
RG 303 /U	5 / 50 S	50	solid	0.94 [0.037]	2.95 [1.161]	S	4.32 [1.701]	na	
RG 316 /U	2.6 / 50 S	50	7 x 0.17	0.53 [0.021]	1.52 [0.060]	S	2.49 [0.098]	C291 170 007	FEP jacket
RD 316	2.6 / 50 D	50	7 x 0.17	0.53 [0.021]	1.52 [0.060]	D	2.80 [1.101]	C291 185 067	FEP jacket
RG 393	10 / 50 D	50	7 x 0.81	2.39 [0.094]	7.24 [2.851]	D	9.91 [3.901]	C291 511 007	FEP jacket
RG 400	5 / 50 / D	50	19 x 0.19	0.98 [0.039]	2.95 [1.161]	D	4.95 [1.951]	C291 324 007	FEP jacket
Flexible cable BT approved									
RD 179	2.6 / 75 D	75	7 x 0.10	0.30 [0.012]	1.6 [0.063]	D	3.07 [1.211]	C291 230 080	LSOH jacket
BT 3002	3.6 / 75 D	75	7 x 0.20	0.31 [0.012]	1.95 [0.077]	D	3.55 [1.401]	C291 246 046	FEP jacket
BT 2002	5 / 75 D	75	7 x 0.10	0.60 [0.024]	2.5 [0.098]	D	5.1 [2.001]	C291 333 080	FEP jacket
Semi rigid cables MIL-C-17 standard									
RG 401 /U	.250"	50	solid	1.63 [0.064]	5.31 [2.091]	--	6.35 [2.501]	C291 870 001	copper tubing
RG 401 alu	.250"	50	solid	1.63 [0.064]	5.31 [2.091]	--	6.35 [2.501]	C291 874 187	tinned alu tubing
RG 402 /U	.141"	50	solid	0.92 [0.036]	2.98 [1.171]	--	3.58 [1.411]	C291 860 001	copper tubing
RG 402 tin	.141"	50	solid	0.92 [0.036]	2.98 [1.171]	--	3.58 [1.411]	C291 862 005	tinned copper tubing
RG 402 silver	.141"	50	solid	0.92 [0.036]	2.98 [1.171]	--	3.58 [1.411]	C291 861 066	silvered copper tubing
RG 402 alu	.141"	50	solid	0.92 [0.036]	2.98 [1.171]	--	3.58 [1.411]	C291 864 187	tinned alu tubing
RG 402 non m.	.141"	50	solid	0.92 [0.036]	2.98 [1.171]	--	3.58 [1.411]	C291 861 061	non magnetic / copper tubing
RG 405 /U	.085"	50	solid	0.51 [0.020]	1.68 [0.066]	--	2.20 [0.871]	C291 850 001	copper tubing
RG 405 tin	.085"	50	solid	0.51 [0.020]	1.68 [0.066]	--	2.20 [0.871]	C291 850 005	tinned copper tubing
RG 405 alu	.085"	50	solid	0.51 [0.020]	1.68 [0.066]	--	2.20 [0.871]	C291 844 187	tinned alu tubing
RG 405 non m.	.085"	50	solid	0.51 [0.020]	1.68 [0.066]	--	2.20 [0.871]	C291 851 001	non magnetic / copper tubing
.047"	.047"	50	solid	0.29 [0.011]	0.94 [0.037]	--	1.19 [0.471]	C291 855 001	copper tubing
.047" tin	.047"	50	solid	0.29 [0.011]	0.94 [0.037]	--	1.19 [0.471]	C291 855 065	tinned copper tubing
Hand-formable cable									
Hand-formable	.085"	50	solid	0.51 [0.020]	1.63 [0.064]	--	2.21 [0.871]	C291 844 065	tin soaked braid
Hand-formable	.141"	50	solid	0.92 [0.036]	2.95 [1.161]	--	3.50 [1.381]	C291 864 065	tin soaked braid
Hand-formable	.141"	50	solid	0.92 [0.036]	2.98 [1.171]	--	4.05 [1.591]	C291 866 378	FEP jacket
Hand-formable	.141"	50	solid	0.92 [0.036]	2.98 [1.171]	--	4.50 [1.771]	C291 866 270	LSZH jacket
Corrugated cables (with helical or ringed/annular copper tube)									
Flexible	1/4"	50	solid	2.38 [0.094]	6.40 [2.521]	--	8.70 [3.431]	na	ringed/annular tube
Flexible	1/2"	50	solid	4.80 [1.891]	11.6 [4.571]	--	16.35 [6.441]	C291 972 085	ringed/annular tube
Flexible	7/8"	50	solid	9.13 [3.591]	22.5 [8.861]	--	27.7 [1.091]	na	ringed/annular tube
Flexible	1 1/4"	50	solid	12.7 [5.001]	32.5 [1.281]	--	39.5 [1.551]	na	ringed/annular tube
Flexible	1 5/8"	50	solid	17.3 [6.811]	43.5 [1.711]	--	50.5 [1.991]	na	ringed/annular tube
Super flexible	1/4"	50	solid	1.90 [0.075]	4.70 [1.851]	--	7.40 [2.911]	C291 993 080	helical tube
Super flexible	3/8"	50	solid	2.60 [1.021]	6.30 [2.481]	--	10.8 [4.251]	C291 996 070	helical tube
Super flexible	1/2"	50	solid	3.60 [1.421]	8.70 [3.431]	--	13.2 [5.201]	C291 994 080	helical tube
Super flexible	7/8"	50	solid	9.04 [3.561]	23.62 [9.301]	--	27.48 [1.082]	C291 996 580	helical tube

Note: S = single braid. D = dual braid. For more information about cables manufactured by Radiall, please consult our online catalog.

www.radiall.com



www.radiall.com

RADIALL
The next conneXion

COAXIAL, RF & MICROWAVE



EUROPE

France - RADIALL S.A.
101, Rue Ph. Hoffmann
93116 ROSNY sous BOIS (Paris)
Tel.: +33 1 49 35 35 35 - Fax: +33 1 48 54 63 63
E-Mail: info@radiall.com

Finland - RADIALL SF

P.O. Box 202 - 01010 OULU
Tel.: +358 407 522 412
E-Mail: infofi@radiall.com

Germany - RADIALL GmbH

Carl-Zeiss Str. 10 Postfach 200143
D63307 - RÖDERMARK (Frankfurt)
Tel.: +49 60 74 91 07 0 - Fax: +49 60 74 91 07 70
E-Mail: infode@radiall.com

Italy - RADIALL Elettronica S.R.L.

Via Concordia, 5 - 20090 ASSAGO MILANO
Tel.: +39 02 48 85 121 - Fax: +39 02 48 84 30 18
E-Mail: infoit@radiall.com
Regional office: Roma

Netherlands - RADIALL BV.

Hogebrinkerweg 15b - 3871 KM HOEVELAKEN
Tel.: +31 33 253 40 09 - Fax: +31 33 253 45 12
E-Mail: infonl@radiall.com

Sweden - RADIALL A.B.

Sjöängsvägen 2 - SE-192 72 SOLLENTUNA (Stockholm)
Tel.: +46 844 434 10 - Fax: +46 875 449 16
E-Mail: infose@radiall.com

U.K. - RADIALL Ltd.

Ground Floor, 6 The Grand Union Office Park,
Packet Boat Lane
UXBRIDGE Middlesex UB8 2GH (London)
Tel.: +44 1895 425 000 - Fax: +44 1895 425 010
E-Mail: infouk@radiall.com

NORTH AMERICA

USA - RADIALL USA, Inc.
6825 West Galveston Street
CHANDLER, Arizona 85226
Tel.: +1 480 682 9400 - Fax: +1 480 682 9403
E-Mail: infousa@radiall.com

ASIA

China - SHANGHAI RADIALL Electronic Co., Ltd.
N° 390 Yong He Road 200072 - SHANGHAI
Tel.: +86 21 66 52 37 88 - Fax: +86 21 66 52 11 77
E-Mail: infosh@radiall.com

Japan - NIHON RADIALL

Shibuya-ku Ebisu 1-5-2, Kougetsu Bldg 405
TOKYO 150-0013
Tel.: +81 3 3440 6241 - Fax: +81 3 3440 6242
E-Mail: infojp@radiall.com

Hong Kong - RADIALL Electronics Ltd.

Flat D, 6/F, Ford Glory Plaza,
37-39 Wing Hong Street
Cheung Sha Wan
KOWLOON HONG KONG
Tel.: +852-2959-3833 - Fax: +852-2959-2636
E-Mail: infohk@radiall.com

India - RADIALL India Pvt. Ltd.

25 D, II Phase, Peenya Industrial Area
BANGALORE 560058
Tel.: +91 80 83 95 271 - Fax: +91 80 83 97 228
E-Mail: infoin@radiall.com

ALSO REPRESENTED IN

- | | | |
|-----------|-------------|--------------|
| Australia | Hungary | Poland |
| Austria | Indonesia | Russia |
| Belgium | Israel | Singapore |
| Brazil | Korea | Spain |
| Czech | Latvia | Switzerland |
| Republic | Lithuania | Taiwan |
| Denmark | Malaysia | Thailand |
| Estonia | Norway | Vietnam |
| Greece | Philippines | South Africa |

For the above countries, please contact the local agent or RADIALL at info@radiall.com


Reference: 003.14.03.04.01

This information is intended as a guide only. To ensure a continuing policy of product improvement, Radiall reserves the right to modify its specifications without prior notification.

D10004XE - 2010 November Edition

2011

RADIALL
The next conneXion

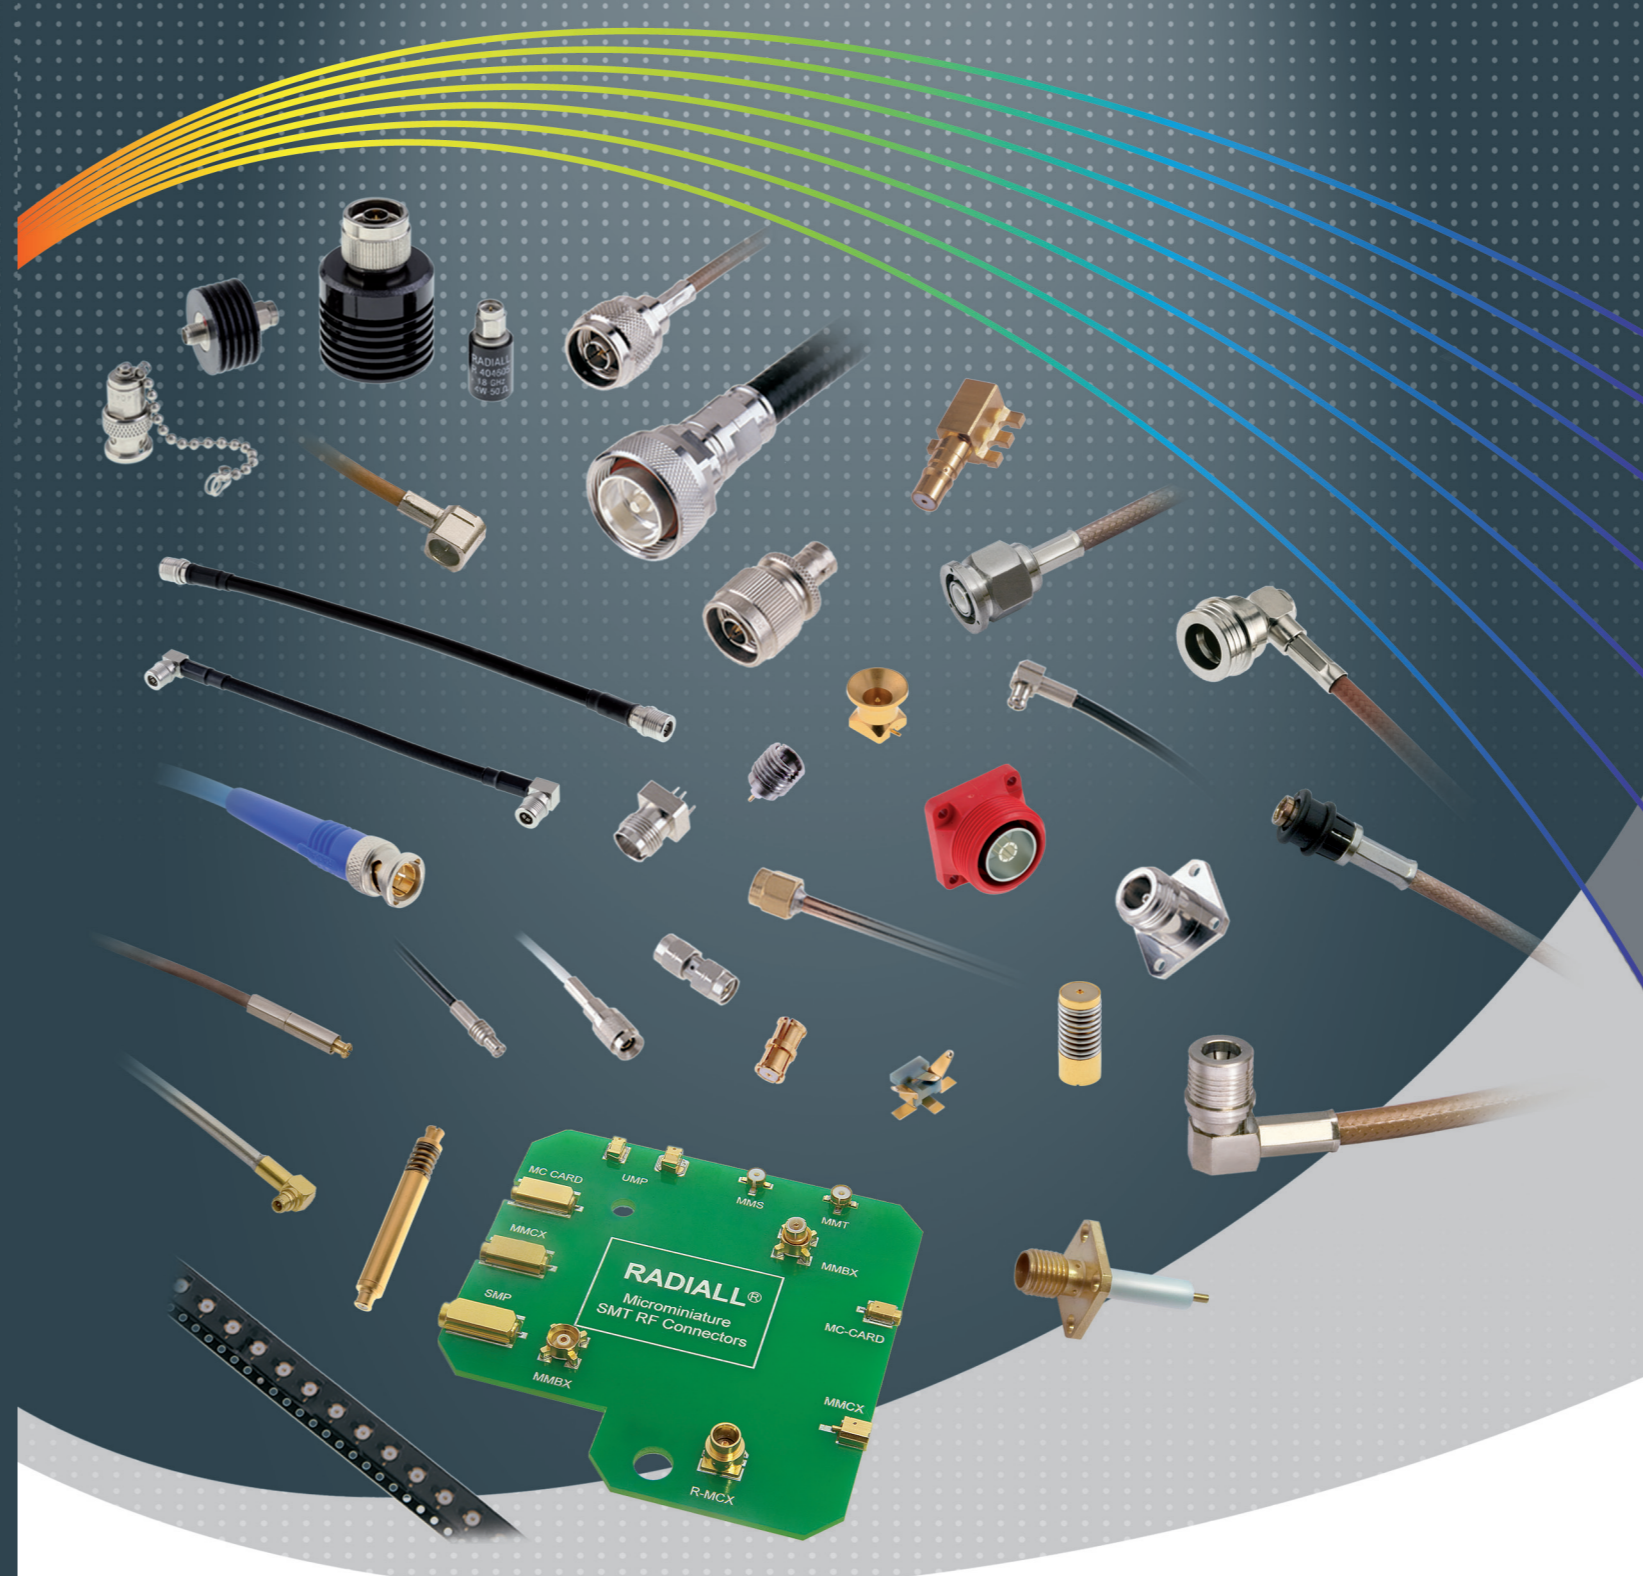

COAXIAL, RF & MICROWAVE
Full Line Catalog

RADIALL
The next conneXion

COMPANY PROFILE



Technical information and sales contacts are available at: www.radiall.com

Simply Your Best Connection

Radiall is a global leader in the design, development and manufacturing of leading edge interconnect solutions. Dedicated to understanding its customers' needs since 1952, Radiall has earned the reputation of being "the best of the best" in engineering ingenuity by providing a constant flow of creative system solutions serving the telecommunications, aerospace, defense, instrumentation, automotive, industrial, medical and broadcast markets.

The Best End-to-End Interconnect Solutions

We offer an extensive range of solutions that supports the most demanding signal transmission applications. 4G wireless infrastructure, active array radars, IED's detection, electrical wiring in aircrafts, soldier tactical radios, in-vehicle communications networks, and magnetic resonance imaging systems are just a few of the complex applications that we support.

- RF coaxial connectors
- Fiber optic connectors and transceivers
- Coaxial and fiber optic cable assemblies and harnesses
- High frequency microwave components
- Coaxial switches, including the smallest and most reliable SPDT relay
- Multipin rectangular connectors
- Rack and panel connectors
- Antennas for tactical networks, aerospace and instrumentation

Best Value-added Services

- **Collaboration:** We work closely with your engineers to understand your business, your technical needs, and your budgetary issues;
- **Wide Product Range:** We manage our product lines thru the entire lifecycle in order to offer you a wide selection of standard products at an affordable cost;
- **Custom Products:** We can tailor products to specific equipment and application needs;
- **Global Presence:** We're everywhere you need us, with worldwide sales, engineering support, R&D in North America, Europe, and Asia, and manufacturing facilities strategically located in the United States, Mexico, France, India, and China;
- **Responsive Support and Service:** From the design stage, planning to post-installation support, we're with you at every step, whether you need sales support or engineering expertise;
- **On-time Delivery:** We support your logistical needs so you get the products when and where you need them;
- **Warranty:** We proudly stand behind our products.



Certifications and Environmental

Radiall is ISO 9001:2008 certified and dedicated to continuous improvement programs that have resulted in also being AS9100, TS16949 and ISO 14001 certified. In addition, Radiall is committed to investing in its people, future technologies and the environment, such as being RoHS (Restriction of Hazardous Substances) and REACH (Registration, Evaluation, Authorization and Restriction of Chemical substances) compliant.

www.radiall.com

RADIALL
The next conneXion

Mouser Electronics

Authorized Distributor



Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

[R114003000W](#) [R114083000W](#) [R114426000W](#) [R114186000W](#) [R114305000W](#) [R114203000W](#) [R114163000W](#)
[R114005000W](#) [R114554000W](#) [R114183000W](#) [R114075000W](#) [R114239000W](#) [R11453000W](#) [R114186100W](#)
[R114165000W](#) [R114205000W](#) [R114665000W](#) [R114082000W](#) [R114424100W](#) [R114313000W](#)

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View R114426000W on WIN SOURCE](#)
-  [Radiall USA, Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management