




**THE DATASHEET OF
DSBT2-M-2D-DC12**



NAIS

4,000 V BREAKDOWN VOLTAGE DS RELAYS

DS-BT RELAYS



mm inch

FEATURES

- 4,000 V breakdown voltage
- Reinforced insulation between coil and contacts
- Surge voltage withstand: 1500 V FCC Parts 68

SPECIFICATIONS

Contact

Arrangement	2 Form C	2 Form D
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)	50 mΩ	
Contact material	Gold-clad silver	
Rating (resistive load)	Nominal switching capacity	2 A 30 V DC 1 A 30 V DC
	Max. switching power	60 W, 125 VA 30 W, 62.5 VA
	Max. switching voltage	220 V DC, 250 V AC
	Max. switching current	2 A 1 A
	Min. switching capacity**1	10 μA 10 mV DC
Electrical life (min. ope.)	Mechanical (at 180 cpm)	2×10 ⁷ 10 ⁶
	Electrical (at 20 cpm)	2×10 ⁵

**1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

Coil

Arrangement	2 Form C	2 Form D
Nominal operating power	360 mW	540 mW

Remarks


- * Specifications will vary with foreign standards certification ratings.
- **1 Measurement at same location as "Initial breakdown voltage" section
- **2 Detection current: 10mA
- **3 Excluding contact bounce time
- **4 Half-wave pulse of sine wave: 11ms, detection time: 10μs
- **5 Half-wave pulse of sine wave: 6ms
- **6 Detection time: 10μs
- **7 Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT in catalog

Characteristics

Arrangement	2 Form C	2 Form D	
Max. operating speed	60 cpm at rated load		
Initial insulation resistance*1	Min. 100 MΩ (at 500 V DC)		
Initial break- down voltage*2	Between open contacts	750 Vrms for 1 min.	500 Vrms for 1 min.
	Between contacts and coil	4,000 Vrms for 1 min.	
	Between contacts sets	750 V	500 V
FCC surge voltage between open contacts	1,500 V		
Operate time*3 (at nominal voltage)	Approx. 3 ms		
Release time (without diode)*3 (at nominal voltage)	Approx. 2 ms		
Temperature rise	Max. 65°C		
Vibration resistance	Functional*4	10 to 55 Hz at double amplitude of 3.3 mm	
	Destruction*5	10 to 55 Hz at double amplitude of 5 mm	
Shock resistance	Functional*6	Min. 294 m/s ² (30 G)	
	Destruction	Min. 980 m/s ² (100 G)	
Conditions for operation, transport and storage*7 (Not freezing and condensing at low temperature)	Ambient temp.	-40°C to +70°C -40°F to +158°F	-40°C to +60°C -40°F to +140°F
	Humidity	5 to 85%R.H.	
Unit weight	Approx. 4.0 g 0.14 oz		

TYPICAL APPLICATIONS ORDERING INFORMATION

Modem
Facsimile
Telecommunication equipment

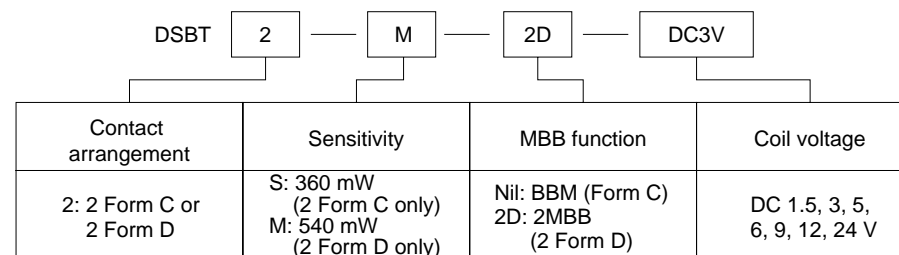

Note: Standard packing; Carton: 25 pcs. Case 1,000 pcs.

DS-BT

TYPES AND COIL DATA (at 20°C 68°F)

1) 2 Form C type

Operating function	Part No.	Coil voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (min.)	Nominal operating current, mA ($\pm 10\%$)	Coil resistance, Ω ($\pm 10\%$)	Nominal operating power, mW	Max. allowable voltage, V DC (at 50°C 122°F)
Single side stable	DSBT2-S-DC1.5V	1.5	1.125	0.15	240	6.25	360	1.95
	DSBT2-S-DC3V	3	2.25	0.3	120	25		3.9
	DSBT2-S-DC5V	5	3.75	0.5	72	69.4		6.5
	DSBT2-S-DC6V	6	4.5	0.6	60	100		7.8
	DSBT2-S-DC9V	9	6.75	0.9	40	225		11.7
	DSBT2-S-DC12V	12	9	1.2	30	400		15.6
	DSBT2-S-DC24V	24	18	2.4	15	1,600		31.2


2) 2 Form D type

Operating function	Part No.	Coil voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (min.)	Nominal operating current, mA ($\pm 10\%$)	Coil resistance, Ω ($\pm 10\%$)	Nominal operating power, mW	Max. allowable voltage, V DC (at 50°C 122°F)
Single side stable	DSBT2-M-2D-DC1.5V	1.5	1.125	0.15	360	4.2	540	1.8
	DSBT2-M-2D-DC3V	3	2.25	0.3	180	16.7		3.6
	DSBT2-M-2D-DC5V	5	3.75	0.5	108	46.3		6
	DSBT2-M-2D-DC6V	6	4.5	0.6	90	66.7		7.2
	DSBT2-M-2D-DC9V	9	6.75	0.9	60	150		10.8
	DSBT2-M-2D-DC12V	12	9	1.2	45	266.7		14.4
	DSBT2-M-2D-DC24V	24	18	2.4	22.5	1,066.7		28.8

Note: Standard packing Tube: 25 pcs. Case: 1,000 pcs.

DIMENSIONS

mm inch

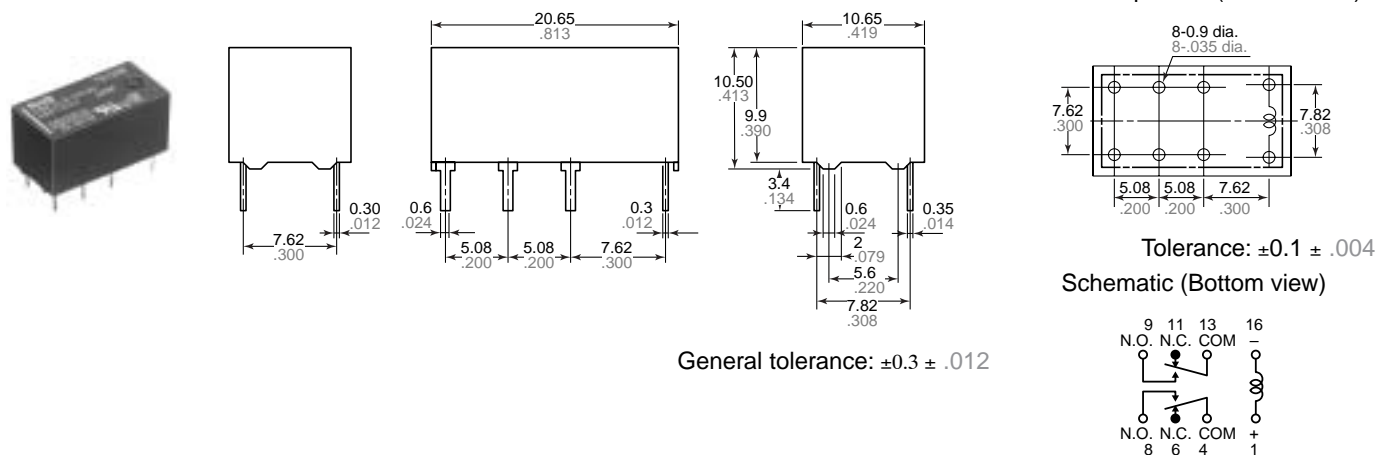


REFERENCE DATA


1. Mechanical life test

Tested sample: DSBT2-S-DC5V, 10 pcs.
Coil applied voltage: 5 V DC
Operating frequency: 30 cpm




Change of pick-up and drop-out voltage

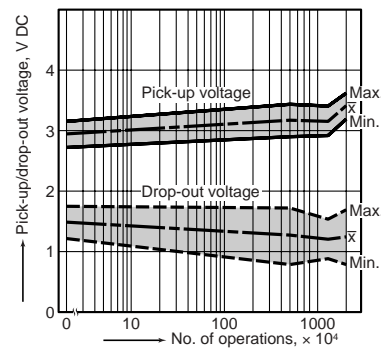


Change of contact resistance

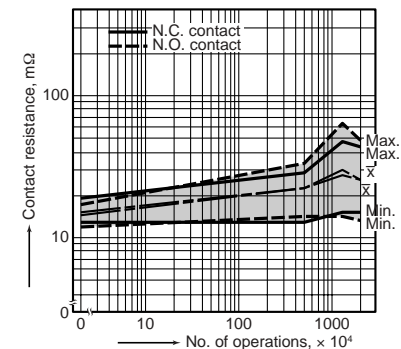


2. Electrical life test (resistive)
 Tested sample: DSBT2-S-DC12V, 6 pcs.
 Condition: 2 A 30 V DC resistive load, 30 cpm
 Circuit

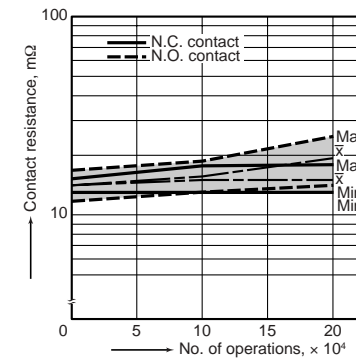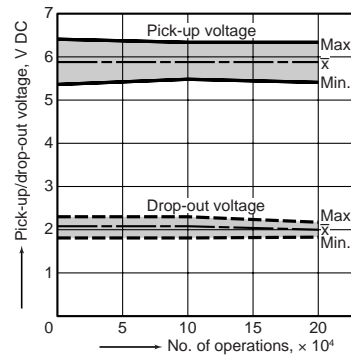


3. Coil temperature rise
 Tested sample: DSBT2-S-DC12V, 5 pcs.
 Measured portion: Inside the coil

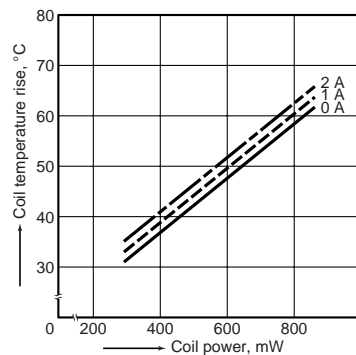


4. Operate and release time characteristics
 Tested sample: DSBT2-S-DC5V, 10 pcs.
 Ambient temperature: 23°C 73°F

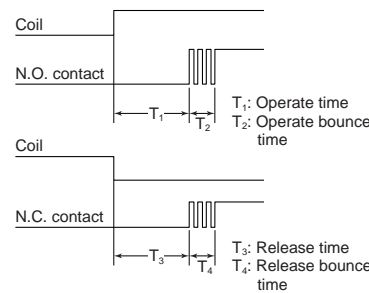


Without diode (T₁)

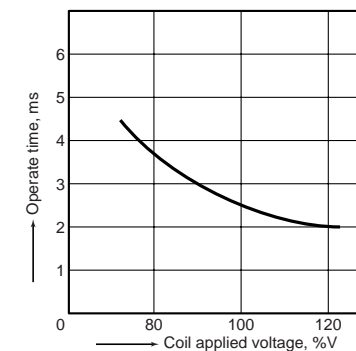


Without diode (T₂)

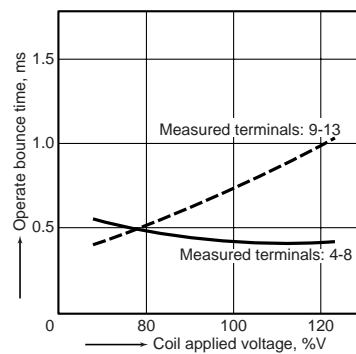


Without diode (T₃)

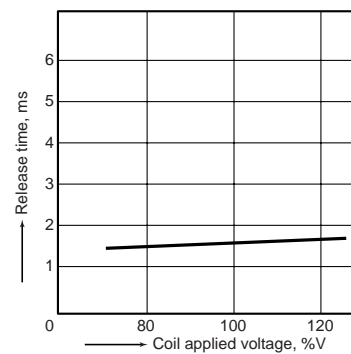


Without diode (T₄)

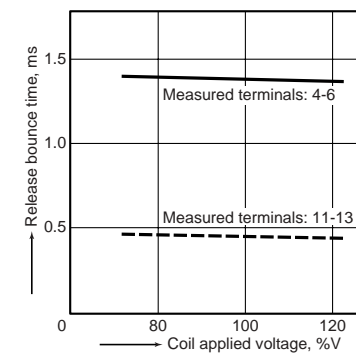


5. Distribution of pick-up and drop-out voltage
 Tested sample: DSBT2-S-DC5V, 50 pcs.
 Pick-up voltage

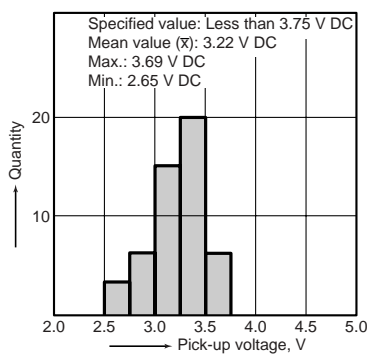

Drop-out voltage

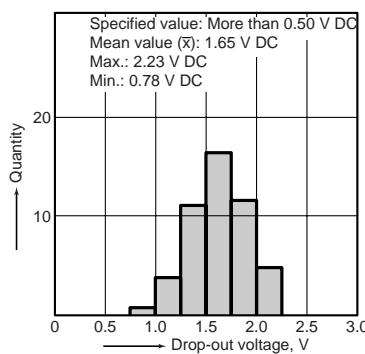

6. Distribution of breakdown voltage
 (between contacts and coil)
 Tested sample: DSBT2-S-DC5V, 100 pcs.

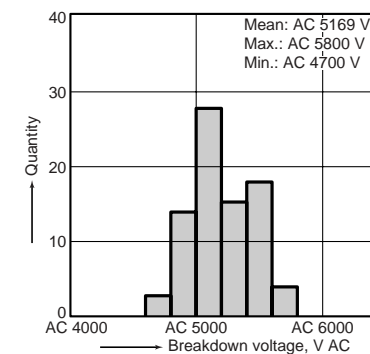

For Cautions for Use, see Relay Technical Information in catalog.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View DSBT2-M-2D-DC12 on WIN SOURCE](#)

 [Panasonic Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management