



**THE DATASHEET OF  
DZ23C12-7-F**



## Features

- Dual Zeners in Common Cathode Configuration
- 300mW Power Dissipation
- Ideally Suited for Automated Insertion
- $\Delta V_z$  For Both Diodes in One Case is  $\leq 5\%$
- Common Anode Style Available, See AZ Series
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **Qualified to AEC-Q101 Standards for High Reliability**
- **PPAP Capable (Note 4)**

## Mechanical Data

- Case: SOT23
- Case Material: Molded Plastic, "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Matte Tin Finish Annealed over Alloy 42 Lead Frame (Lead Free Plating). Solderable per MIL-STD-202, Method 208 ③
- Polarity: See Diagram
- Weight: 0.008 grams (Approximate)

SOT23



Top View



Device Schematic

## Ordering Information (Notes 5 and 6)

Part Number	Qualification	Packaging	Shipping
(Type Number)-7-F*	Commercial	SOT23	3000/Tape & Reel
(Type Number)Q-7-F*	Automotive	SOT23	3000/Tape & Reel

\*Add "-7-F" to the appropriate type number in Electrical Characteristics Table on Page 2. Example: 6.2V Zener = DZ23C6V2-7-F.

- Notes:
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
  2. See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
  3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
  4. Automotive products are AEC-Q101 qualified and are PPAP capable. Refer to <https://www.diodes.com/quality/>.
  5. Product manufactured with Date Code OW (week 42, 2009) and newer are built with Green Molding Compound. Product manufactured prior to Date Code OW are built with Non-Green Molding Compound and may contain Halogens or Sb<sub>2</sub>O<sub>3</sub> Fire Retardants.
  6. For packaging details, go to our website at <https://www.diodes.com/design/support/packaging/diodes-packaging/>.

## Marking Information



K = SAT (Shanghai Assembly / Test Site)  
 xx = Product Type Marking Code  
 See Electrical Characteristics Table  
 YM = Date Code Marking  
 Y = Year (ex: G = 2019)  
 M = Month (ex: 9 = September)



C = CAT (Chengdu Assembly / Test Site)  
 xx = Product Type Marking Code  
 See Electrical Characteristics Table  
 YM = Date Code Marking  
 Y = Year (ex: G = 2019)  
 M = Month (ex: 9 = September)

### Date Code Key

Year	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023
Code	A	B	C	D	E	F	G	H	I	J	K

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

## Thermal Characteristics



Characteristic	Symbol	Value	Unit
Power Dissipation (Note 7)	$P_D$	300	mW
Thermal Resistance, Junction to Ambient Air (Note 7)	$R_{\theta JA}$	417	$^{\circ}C/W$
Operating and Storage Temperature Range	$T_J, T_{STG}$	-65 to +150	$^{\circ}C$

Note: 7. Mounted on FR4 PC Board with recommended pad layout which can be found on our website at <http://www.diodes.com>.

## Electrical Characteristics (@ $T_A = +25^{\circ}C$ , unless otherwise specified.)

Type Number	Marking Code	Zener Voltage Range (Note 8)	Maximum Zener Impedance $f = 1kHz$		Typical Temperature Coefficient  TC (%/ $^{\circ}C$ )	Minimum Reverse Voltage (Note 8)
		@ $I_{ZT} = 5.0mA$	$Z_{ZT}$ @ $I_{ZT} = 5.0mA$	$Z_{ZK}$ @ $I_{ZK} = 1.0mA$		@ $I_R = 0.1\mu A$
		$V_Z$ (V)	$\Omega$	$\Omega$	$V_R$ (V)	
DZ23C2V7	V1	2.5 to 2.9	83	500	-0.065	—
DZ23C3V0	V2	2.8 to 3.2	95	500	-0.060	—
DZ23C3V3	V3	3.1 to 3.5	95	500	-0.055	—
DZ23C3V6	V4	3.4 to 3.8	95	500	-0.055	—
DZ23C3V9	V5	3.7 to 4.1	95	500	-0.050	—
DZ23C4V3	V6	4.0 to 4.6	95	500	-0.035	—
DZ23C4V7	V7	4.4 to 5.0	78	500	-0.015	—
DZ23C5V1	V8	4.8 to 5.4	60	480	+0.005	0.8
DZ23C5V6	V9	5.2 to 6.0	40	400	+0.020	1.0
DZ23C6V2	VA	5.8 to 6.6	10	200	+0.030	2.0
DZ23C6V8	VB	6.4 to 7.2	8.0	150	+0.045	3.0
DZ23C7V5	VC	7.0 to 7.9	7.0	50	+0.050	5.0
DZ23C8V2	VD	7.7 to 8.7	7.0	50	+0.055	6.0
DZ23C9V1	VE	8.5 to 9.6	10	50	+0.065	7.0
DZ23C10	VF	9.4 to 10.6	15	70	+0.065	7.5
DZ23C11	VG	10.4 to 11.6	20	70	+0.070	8.5
DZ23C12	VH	11.4 to 12.7	20	90	+0.075	9.0
DZ23C13	VI	12.4 to 14.1	25	110	+0.080	10.0
DZ23C15	VJ	13.8 to 15.6	30	110	+0.080	11.0
DZ23C16	VK	15.3 to 17.1	40	170	+0.090	12.0
DZ23C18	VL	16.8 to 19.1	50	170	+0.090	14.0
DZ23C20	VM	18.8 to 21.2	50	220	+0.090	15.0
DZ23C22	VN	20.8 to 23.3	55	220	+0.090	17.0
DZ23C24	VO	22.8 to 25.6	80	220	+0.090	18.0
DZ23C27	VP	25.1 to 28.9	80	250	+0.090	20.0
DZ23C30	VQ	28 to 32	80	250	+0.090	22.5
DZ23C33	VR	31 to 35	80	250	+0.090	25.0
DZ23C36	VS	34 to 38	90	250	+0.090	27.0
DZ23C39	VT	37 to 41	90	300	+0.110	29.0
DZ23C43	VU	40 to 46	100	700	+0.110	32.0
DZ23C47	VV	44 to 50	100	750	+0.110	35.0
DZ23C51	VW	48 to 54	100	750	+0.110	38.0


Note: 8. Short duration pulse test used to minimize self-heating effect.

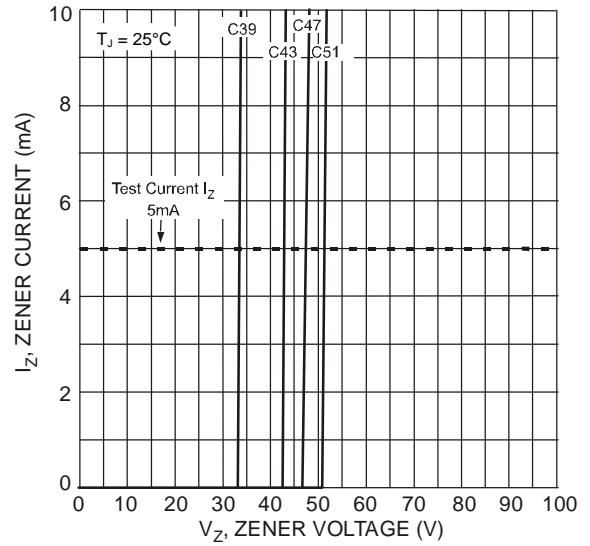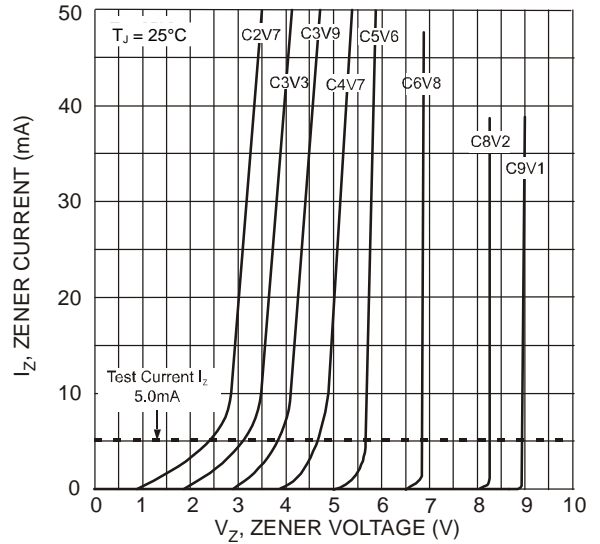

## Package Outline Dimensions

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

### SOT23

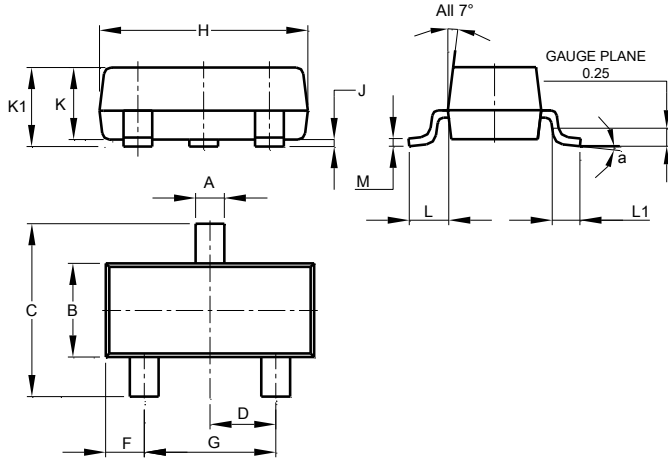

SOT23			
Dim	Min	Max	Typ
A	0.37	0.51	0.40
B	1.20	1.40	1.30
C	2.30	2.50	2.40
D	0.89	1.03	0.915
F	0.45	0.60	0.535
G	1.78	2.05	1.83
H	2.80	3.00	2.90
J	0.013	0.10	0.05
K	0.890	1.00	0.975
K1	0.903	1.10	1.025
L	0.45	0.61	0.55
L1	0.25	0.55	0.40
M	0.085	0.150	0.110
a	0°	8°	--
All Dimensions in mm			

## Suggested Pad Layout

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

### SOT23



Dimensions	Value (in mm)
C	2.0
X	0.8
X1	1.35
Y	0.9
Y1	2.9

**IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

**LIFE SUPPORT**

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.


Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2019, Diodes Incorporated

[www.diodes.com](http://www.diodes.com)

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View DZ23C12-7-F on WIN SOURCE](#)

 [Diodes Incorporated](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management