


## BR1225A

## BR Coin-type Lithium Battery for high temperature



## Features &amp; Benefits

In addition to the appeal of our BR series coin-type lithium batteries, poly-carbonmonofluoride cells can operate in the temperatures up to 125°C

## Applications

Automotive electronic components(TPMS, ETC), hot water and electricity meters, memory backup(host computers, FA equipment), etc.

## Specifications

Nominal voltage	3V	
Nominal capacity	48mAh	
Continuous drain	0.03mA	
Dimensions* <sup>1</sup>	Diameter(Max.)	12.5mm
	Height(Max.)	2.5mm
Weight* <sup>1</sup>	Approx. 0.8g	
Operating temperature	-40°C to +125°C	


\*<sup>1</sup> Without tabs.

## Terminal types

Please see the documents for the terminal and lead wire settings.

- [Line up of tab terminal types\(by shape\)](#)
- [Line up of tab terminal types\(by product number\)](#)

## Discharge temperature characteristics

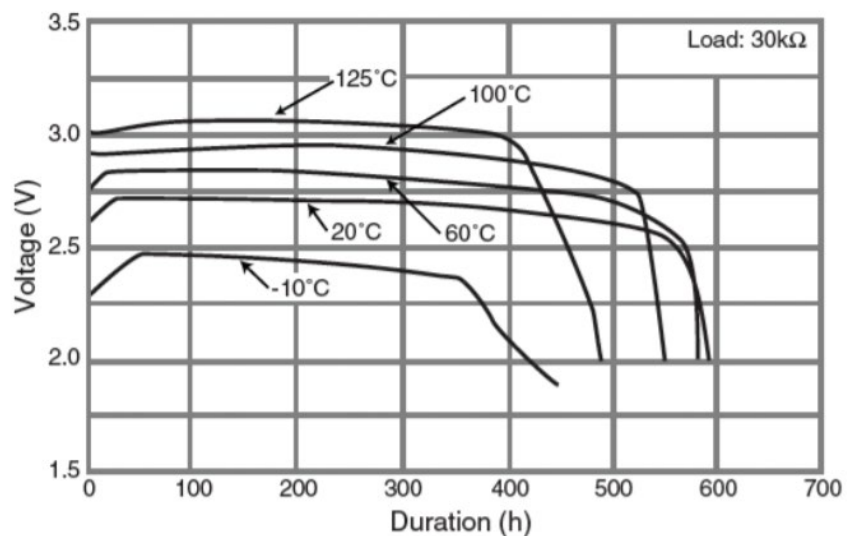

Panasonic Energy Co., Ltd.



<https://industrial.panasonic.com/ww/products/pt/lithium-batteries>

As of April, 2022. Panasonic offers batteries with tabs or lead wires. This data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty. The contents of this product information are subject to change without notice.








## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View BR-1225A/FAN on WIN SOURCE](#)
-  [Panasonic Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management