



**THE DATASHEET OF
TCOB1E226M8R-EB1**



TCO Series

Conductive Polymer Chip Capacitors (Standard)



FEATURES


- Ta-polymer technology
- High ripple capability
- High CV
- Surge robust
- J-lead LF

APPLICATIONS

- DC/DC
- Industrial
- Computers
- Telecom
- IoT
- Home applications



MARKING

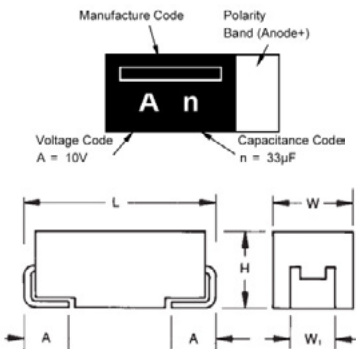

CASE DIMENSIONS:

millimeters (inches)

| Code | EIA Code | EIA Metric | L±0.20 (0.008) | W±0.20 (0.008) | H±0.20 (0.008) | W _i ±0.20 (0.008) | A±0.30 (0.012) |
|------|----------|------------|-------------------|-------------------|-------------------|---------------------------------|-------------------|
| B | 1210 | 3528-21 | 3.50 (0.138) | 2.80 (0.110) | 1.90 (0.075) | 1.90 (0.075) | 0.80 (0.031) |

HOW TO ORDER

TCO
Type

B
Case Size
See table
above

1A
Rated DC Voltage
0E = 2.5Vdc
0J = 6.3Vdc
1A = 10Vdc
1C = 16Vdc
1E = 25Vdc

336
Capacitance Code
pF code: 1st two digits
represent significant figures,
3rd digit represents multiplier
(number of zeros to follow)

M
Tolerance
M = ±20%

8R
Packaging
8 = Tape width
R = Positive electrode
on the side opposite to
sprocket hole

- □□□
Discrimination code

TECHNICAL SPECIFICATIONS

| | |
|------------------------|--|
| Technical Data: | All technical data relate to an ambient temperature of +25°C |
| Capacitance Range: | 15µF to 330µF |
| Capacitance Tolerance: | ±20% |
| Leakage Current DCL: | Please see the ratings and part number reference table below |
| Temperature Range: | -55°C to +105°C |

Note: Conductive Polymer Capacitors are designed to operate within the limits of the environmental conditions specified for each series. If operated continuously at their maximum temperature and / or humidity limit, or beyond these limits, capacitors may exhibit a parametric shift in capacitance and increases in ESR. These changes may occur earlier if the specified environmental conditions are exceeded. Similarly, their normal operational time period will be significantly extended if their general duty cycle includes operation below maximum temperature within humidity controlled environments. Careful attention should be paid to maximum temperature with associated high humidity environments as well as voltage derating, ripple current and current surges.

Please reference the KYOCERA AVX Conductive Polymer Capacitor Guidelines for more information or contact factory for application assistance

TCO Series

Conductive Polymer Chip Capacitors (Standard)

CAPACITANCE AND RATED VOLTAGE RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Rated Voltage DC (V _R) @ 105°C | | | | | Cap Code |
|-------------|------|--|---------|--------|--------|--------|----------|
| μF | Code | 2.5V(e) | 6.3V(j) | 10V(A) | 16V(C) | 25V(E) | |
| 15 | 156 | | | | | 100 | e |
| 22 | 226 | | | | | 90 | j |
| 33 | 336 | | | 150 | 100 | | n |
| 47 | 476 | | | 150 | | | s |
| 100 | 107 | | 35,45 | | | | ā |
| 150 | 157 | | 35,45 | | | | ē |
| 220 | 227 | 35 | 35 | | | | ī |
| 330 | 337 | 35,45 | | | | | ñ |

Released ratings, (ESR ratings in mOhms)

Note: Voltage ratings are minimum values. KYOCERA AVX reserves the right to supply higher voltage ratings in the same case size, to the same reliability standards.

RATINGS & PART NUMBER REFERENCE

| Part No. | Case Size | Capacitance (μF) | Rated Voltage (V) | Maximum Operating Temp. (°C) | DCL Max. (μA) | DF Max. (%) | ESR Max. @100kHz (mΩ) | 100kHz RMS Current (mA) 45°C | MSL |
|------------------|-----------|------------------|-------------------|------------------------------|---------------|-------------|-----------------------|------------------------------|-----|
| 2.5 Volt | | | | | | | | | |
| TCOB0E227M8R-EN1 | B | 220 | 2.5 | 105 | 55.0 | 8 | 35 | 1900 | 3 |
| TCOB0E337M8R-EN2 | B | 330 | 2.5 | 105 | 82.5 | 15 | 35 | 1900 | 3 |
| TCOB0E337M8R-ES2 | B | 330 | 2.5 | 105 | 82.5 | 15 | 45 | 1700 | 3 |
| 6.3 Volt | | | | | | | | | |
| TCOB0J107M8R-EN1 | B | 100 | 6.3 | 105 | 63.0 | 8 | 35 | 1900 | 3 |
| TCOB0J107M8R-ES1 | B | 100 | 6.3 | 105 | 63.0 | 8 | 45 | 1700 | 3 |
| TCOB0J157M8R-EN1 | B | 150 | 6.3 | 105 | 95.5 | 15 | 35 | 1900 | 3 |
| TCOB0J157M8R-ES2 | B | 150 | 6.3 | 105 | 94.5 | 15 | 45 | 1700 | 3 |
| TCOB0J227M8R-EN1 | B | 220 | 6.3 | 105 | 139.0 | 15 | 35 | 1900 | 3 |
| 10 Volt | | | | | | | | | |
| TCOB1A336M8R | B | 33 | 10 | 105 | 33.0 | 8 | 150 | 900 | 3 |
| TCOB1A476M8R | B | 47 | 10 | 105 | 47.0 | 8 | 150 | 900 | 3 |
| 16 Volt | | | | | | | | | |
| TCOB1C336M8R | B | 33 | 16 | 105 | 159.0 | 10 | 100 | 1100 | 3 |
| 25 Volt | | | | | | | | | |
| TCOB1E156M8R | B | 15 | 25 | 105 | 113.0 | 10 | 100 | 1100 | 3 |
| TCOB1E226M8R-EB1 | B | 22 | 25 | 105 | 55.0 | 10 | 90 | 1200 | 3 |

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.
All technical data relates to an ambient temperature of +25C.

Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 1.5 volts.
DCL is measured at rated voltage after 5 minutes.
ESR allowed to move up to 1.25 times catalog limit post mounting.

NOTE: KYOCERA AVX reserves the rights to supply higher voltage rating in the same case size, to the same reliability standards.

TCO Series

Conductive Polymer Chip Capacitors (Standard)




QUALIFICATION TABLE

| TEST | TCO series (Temperature range -55°C to +105°C) | | | |
|-----------------------|--|---------------|--------------------|------------------------------------|
| | Condition | | Characteristics | |
| Endurance | Apply rated voltage (Ur) at 105°C for 1000hrs through a serial resistance of $\leq 3.0\Omega$. Stabilize at room temperature for 24 hours before measuring. | | Visual examination | no visible damage |
| | | | DCL | 2x initial limit |
| | | | $\Delta C/C$ | within $\pm 20\%$ of initial value |
| | | | DF | 1.5x initial limit |
| Humidity | Store at 60 \pm 2°C, 90-95% relative humidity for 500+12/0 hours. Stabilize at room temperature and humidity for 24 hours before measuring. | | Visual examination | no visible damage |
| | | | DCL | 1.5x initial limit |
| | | | $\Delta C/C$ | within +30/-20% of initial value |
| | | | DF | 1.5x initial limit |
| Temperature Stability | Step | Temperature°C | Duration(min) | |
| | 1 | -55 | 15 | |
| | 2 | +105 | 15 | |
| | | | | |
| Surge Voltage | Apply 1.3x rated voltage (Ur) at 85 \pm 2°C for 1000 cycles, 300sec charge and 30sec discharge resistance 1000 Ω . | | Visual examination | no visible damage |
| | | | DCL | initial limit |
| | | | $\Delta C/C$ | $\pm 20\%$ of initial limit |
| | | | DF | initial limit |
| Vibration | 4.17 JIS C 5101-1 Frequency: 10 to 55 to 10Hz/min. Amplitude: 1.5mm Time: 2hours each in X and Y directions | | Visual examination | no visible damage |
| | | | DCL | initial limit |
| | | | $\Delta C/C$ | within $\pm 5\%$ of initial value |
| | | | DF | initial limit |

*Initial Limit
For use outside of recommended conditions and special request, please contact KYOCERA AVX.
Initial measurement max. 1hr after the removal from dry pack or after pretreatment at 85°C for 24 hours.


PACKAGING SPECIFICATIONS

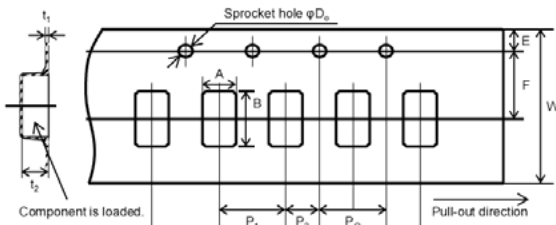

Unit (mm)

| Case | A ± 0.10 | B ± 0.10 | W ± 0.20 | E ± 0.10 | F ± 0.05 | P1 ± 0.10 | P2 ± 0.05 | PO ± 0.10 | DO $\pm 0.10/0$ | t1 ± 0.05 | t2 ± 0.10 | Standard packaging quantity |
|------|--------------|--------------|--------------|--------------|--------------|---------------|---------------|---------------|-----------------|---------------|---------------|-----------------------------|
| B | 3.30 | 3.80 | 8.00 | 1.75 | 3.50 | 4.00 | 2.00 | 4.00 | $\phi 1.50$ | 0.25 | 2.20 | 2,000 pcs |

REEL DIMENSIONS

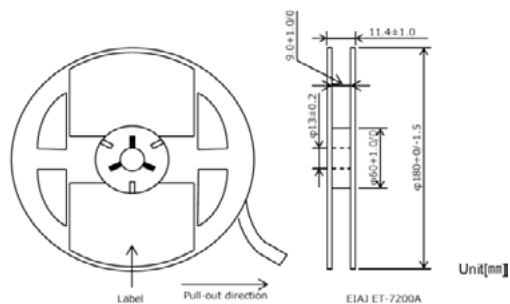

KYOCERA AVX The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.kyocera-avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

TDS-PTNO-0043 | Rev 1

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View TCOB1E226M8R-EB1 on WIN SOURCE](#)
- ⊖ [AVX Corp/Kyocera Corp Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management