




# THE DATASHEET OF 15KPA70CA



### 15KPA Series

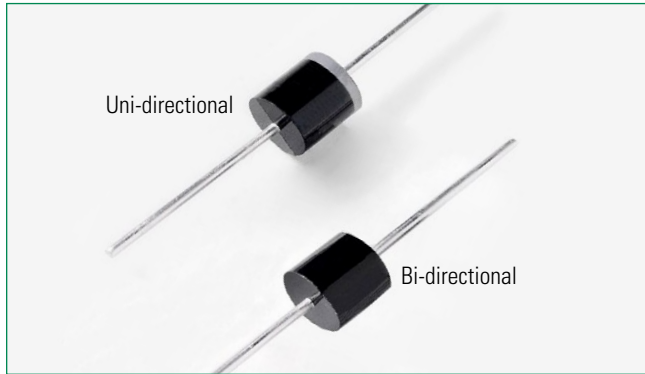

#### Agency Approvals

| Agency                                                                            | Agency File Number |
|-----------------------------------------------------------------------------------|--------------------|
|  | E230531            |


#### Maximum Ratings and Thermal Characteristics (T<sub>A</sub> = 25°C unless otherwise noted)

| Parameter                                                                            | Symbol                            | Value      | Unit |
|--------------------------------------------------------------------------------------|-----------------------------------|------------|------|
| Peak Pulse Power Dissipation by 10/1000µs Test Waveform (Fig.2)(Note 1)              | P <sub>PPM</sub>                  | 15         | kW   |
| Steady State Power Dissipation on Infinite Heat Sink at T <sub>L</sub> = 75°C        | P <sub>D</sub>                    | 8.0        | W    |
| Peak Forward Surge Current, 8.3ms Single Half Sine Wave Unidirectional Only (Note 2) | I <sub>FSM</sub>                  | 400        | A    |
| Operating Junction and Storage Temperature Range                                     | T <sub>J</sub> , T <sub>STG</sub> | -55 to 175 | °C   |
| Typical Thermal Resistance Junction to Lead                                          | R <sub>θJL</sub>                  | 8.0        | °C/W |
| Typical Thermal Resistance Junction to Ambient                                       | R <sub>θJA</sub>                  | 40         | °C/W |

**Notes:**

1. Non-repetitive current pulse, per Fig. 4 and derated above T<sub>J</sub> (initial) = 25°C per Fig. 3.
2. Measured on 8.3ms single half sine wave or equivalent square wave, duty cycle=4 per minute maximum.

#### Functional Diagram

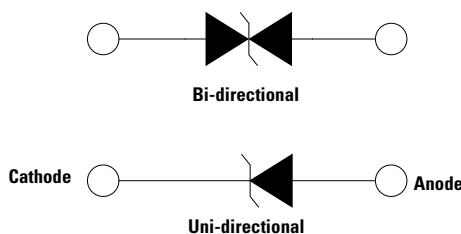

#### Descriptions

The 15KPA Series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

#### Features

- Glass passivated chip junction in P600 package
- 15kW peak pulse capability at 10/1000µs waveform, repetition rate (duty cycles):0.01 %
- Fast response time: typically less than 1.0ps from 0 Volts to BV min
- Excellent clamping capability
- Typical failure mode is short from over-specified voltage or current
- Whisker test is conducted based on JEDEC JESD201A per its table 4a and 4c
- IEC 61000-4-2 ESD 30kV(Air), 30kV (Contact)
- ESD protection of data lines in accordance with IEC 61000-4-2
- EFT protection of data lines in accordance with IEC 61000-4-4
- Low incremental surge resistance
- Typical I<sub>R</sub> less than 2µA when V<sub>BR</sub> min>36V
- High temperature to reflow soldering guaranteed: 260°C/40sec / 0.375", (9.5mm) lead length, 5 lbs., (2.3kg) tension
- V<sub>BR</sub> @ T<sub>J</sub> = V<sub>BR</sub> @ 25°C x (1 + α T x (T<sub>J</sub> - 25)) (α T: Temperature Coefficient, typical value is 0.1%)
- UL Recognized compound meeting flammability rating V-0
- Matte tin lead-free plated
- Halogen free and RoHS compliant
- Pb-free E3 means 2nd level interconnect is Pb-free and the terminal finish material is tin(Sn) (IPC/ JEDEC J-STD-609A.01)
- Recognized to UL 497B

#### Applications

TVS components are ideal for the protection of I/O interfaces, V<sub>CC</sub> bus and other vulnerable circuits used in telecom, computer, industrial and consumer electronic applications.

#### Additional Information



Datasheet




Resources



Samples

### Electrical Characteristics (T<sub>A</sub>=25°C unless otherwise noted)

| Part Number (Uni) | Part Number (Bi) | Reverse Stand off Voltage V <sub>R</sub> (Volts) | Breakdown Voltage V <sub>BR</sub> (Volts) @ I <sub>T</sub> |       | Test Current I <sub>T</sub> (mA) | Maximum Peak Pulse Current I <sub>PP</sub> (A) | Maximum Reverse Leakage I <sub>R</sub> @ V <sub>R</sub> (μA) | Maximum Clamping Voltage V <sub>C</sub> @ I <sub>PP</sub> (V) | Agency Recognition  |
|-------------------|------------------|--------------------------------------------------|------------------------------------------------------------|-------|----------------------------------|------------------------------------------------|--------------------------------------------------------------|---------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
|                   |                  |                                                  | MIN                                                        | MAX   |                                  |                                                |                                                              |                                                               |                                                                                                        |
| 15KPA17A          | 15KPA17CA        | 17                                               | 18.99                                                      | 20.79 | 50                               | 515.4                                          | 5000                                                         | 29.3                                                          | X                                                                                                      |
| 15KPA18A          | 15KPA18CA        | 18                                               | 20.11                                                      | 22.01 | 50                               | 488.7                                          | 5000                                                         | 30.9                                                          | X                                                                                                      |
| 15KPA20A          | 15KPA20CA        | 20                                               | 22.34                                                      | 24.46 | 20                               | 440.2                                          | 1500                                                         | 34.3                                                          | X                                                                                                      |
| 15KPA22A          | 15KPA22CA        | 22                                               | 24.57                                                      | 26.91 | 10                               | 407.0                                          | 500                                                          | 37.1                                                          | X                                                                                                      |
| 15KPA24A          | 15KPA24CA        | 24                                               | 26.81                                                      | 29.35 | 5                                | 371.0                                          | 150                                                          | 40.7                                                          | X                                                                                                      |
| 15KPA26A          | 15KPA26CA        | 26                                               | 29.04                                                      | 31.80 | 5                                | 343.2                                          | 50                                                           | 44.0                                                          | X                                                                                                      |
| 15KPA28A          | 15KPA28CA        | 28                                               | 31.28                                                      | 34.24 | 5                                | 317.9                                          | 25                                                           | 47.5                                                          | X                                                                                                      |
| 15KPA30A          | 15KPA30CA        | 30                                               | 33.51                                                      | 36.70 | 5                                | 297.8                                          | 15                                                           | 50.7                                                          | X                                                                                                      |
| 15KPA33A          | 15KPA33CA        | 33                                               | 36.9                                                       | 40.4  | 5                                | 276.1                                          | 2                                                            | 54.7                                                          | X                                                                                                      |
| 15KPA36A          | 15KPA36CA        | 36                                               | 40.2                                                       | 44.0  | 5                                | 252.5                                          | 2                                                            | 59.8                                                          | X                                                                                                      |
| 15KPA40A          | 15KPA40CA        | 40                                               | 44.7                                                       | 48.9  | 5                                | 229.5                                          | 2                                                            | 65.8                                                          | X                                                                                                      |
| 15KPA43A          | 15KPA43CA        | 43                                               | 48.0                                                       | 52.6  | 5                                | 216.3                                          | 2                                                            | 69.8                                                          | X                                                                                                      |
| 15KPA45A          | 15KPA45CA        | 45                                               | 50.3                                                       | 55.0  | 5                                | 207.4                                          | 2                                                            | 72.8                                                          | X                                                                                                      |
| 15KPA48A          | 15KPA48CA        | 48                                               | 53.6                                                       | 58.7  | 5                                | 194.3                                          | 2                                                            | 77.7                                                          | X                                                                                                      |
| 15KPA51A          | 15KPA51CA        | 51                                               | 57.0                                                       | 62.4  | 5                                | 182.1                                          | 2                                                            | 82.9                                                          | X                                                                                                      |
| 15KPA54A          | 15KPA54CA        | 54                                               | 60.3                                                       | 66.0  | 5                                | 172.2                                          | 2                                                            | 87.7                                                          | X                                                                                                      |
| 15KPA58A          | 15KPA58CA        | 58                                               | 64.8                                                       | 70.9  | 5                                | 161.0                                          | 2                                                            | 93.8                                                          | X                                                                                                      |
| 15KPA60A          | 15KPA60CA        | 60                                               | 67.0                                                       | 73.4  | 5                                | 155.0                                          | 2                                                            | 97.4                                                          | X                                                                                                      |
| 15KPA64A          | 15KPA64CA        | 64                                               | 71.5                                                       | 78.3  | 5                                | 144.9                                          | 2                                                            | 104.2                                                         | X                                                                                                      |
| 15KPA70A          | 15KPA70CA        | 70                                               | 78.2                                                       | 85.6  | 5                                | 132.9                                          | 2                                                            | 113.6                                                         | X                                                                                                      |
| 15KPA75A          | 15KPA75CA        | 75                                               | 83.8                                                       | 91.7  | 5                                | 123.8                                          | 2                                                            | 122.0                                                         | X                                                                                                      |
| 15KPA78A          | 15KPA78CA        | 78                                               | 87.1                                                       | 95.4  | 5                                | 119.7                                          | 2                                                            | 126.1                                                         | X                                                                                                      |
| 15KPA85A          | 15KPA85CA        | 85                                               | 94.9                                                       | 104.0 | 5                                | 109.7                                          | 2                                                            | 137.6                                                         | X                                                                                                      |
| 15KPA90A          | 15KPA90CA        | 90                                               | 100.5                                                      | 110.1 | 5                                | 103.7                                          | 2                                                            | 145.6                                                         | X                                                                                                      |
| 15KPA100A         | 15KPA100CA       | 100                                              | 111.7                                                      | 122.3 | 5                                | 93.6                                           | 2                                                            | 161.3                                                         | X                                                                                                      |
| 15KPA110A         | 15KPA110CA       | 110                                              | 122.9                                                      | 134.5 | 5                                | 84.5                                           | 2                                                            | 178.6                                                         | X                                                                                                      |
| 15KPA120A         | 15KPA120CA       | 120                                              | 134.0                                                      | 146.8 | 5                                | 78.5                                           | 2                                                            | 192.3                                                         | X                                                                                                      |
| 15KPA130A         | 15KPA130CA       | 130                                              | 145.2                                                      | 159.0 | 5                                | 72.5                                           | 2                                                            | 208.3                                                         | X                                                                                                      |
| 15KPA150A         | 15KPA150CA       | 150                                              | 167.6                                                      | 183.5 | 5                                | 62.4                                           | 2                                                            | 241.9                                                         | X                                                                                                      |
| 15KPA160A         | 15KPA160CA       | 160                                              | 178.7                                                      | 195.7 | 5                                | 58.4                                           | 2                                                            | 258.6                                                         | X                                                                                                      |
| 15KPA170A         | 15KPA170CA       | 170                                              | 189.9                                                      | 207.9 | 5                                | 55.4                                           | 2                                                            | 272.7                                                         | X                                                                                                      |
| 15KPA180A         | 15KPA180CA       | 180                                              | 201.1                                                      | 220.1 | 5                                | 52.3                                           | 2                                                            | 288.5                                                         | X                                                                                                      |
| 15KPA200A         | 15KPA200CA       | 200                                              | 223.4                                                      | 244.6 | 5                                | 47.3                                           | 2                                                            | 319.1                                                         | X                                                                                                      |
| 15KPA220A         | 15KPA220CA       | 220                                              | 245.7                                                      | 269.1 | 5                                | 42.4                                           | 2                                                            | 356.0                                                         | X                                                                                                      |
| 15KPA240A         | 15KPA240CA       | 240                                              | 268.1                                                      | 293.5 | 5                                | 39.3                                           | 2                                                            | 384.6                                                         | X                                                                                                      |
| 15KPA260A         | 15KPA260CA       | 260                                              | 290.4                                                      | 318.0 | 5                                | 36.2                                           | 2                                                            | 416.7                                                         | X                                                                                                      |
| 15KPA280A         | 15KPA280CA       | 280                                              | 312.8                                                      | 342.4 | 5                                | 33.2                                           | 2                                                            | 454.5                                                         | X                                                                                                      |

For bidirectional type having V<sub>R</sub> of 30 volts and less, the I<sub>R</sub> limit is double.

For parts without A, the V<sub>BR</sub> is ±10% and V<sub>C</sub> is 5% higher than with A parts, the parts without A are currently available, but not recommended for new designs. The parts with A are preferred.


**I-V Curve Characteristics**




- $P_{PPM}$**  Peak Pulse Power Dissipation – Max power dissipation
- $V_R$**  Stand-off Voltage – Maximum voltage that can be applied to the TVS without operation
- $V_{BR}$**  Breakdown Voltage – Maximum voltage that flows through the TVS at a specified test current ( $I_T$ )
- $V_C$**  Clamping Voltage – Peak voltage measured across the TVS at a specified  $I_{ppm}$  (peak impulse current)
- $I_R$**  Reverse Leakage Current – Current measured at  $V_R$
- $V_F$**  Forward Voltage Drop for Uni-directional

**Ratings and Characteristic Curves ( $T_A=25^\circ\text{C}$  unless otherwise noted)**

**Figure 1 - TVS Transients Clamping Waveform**

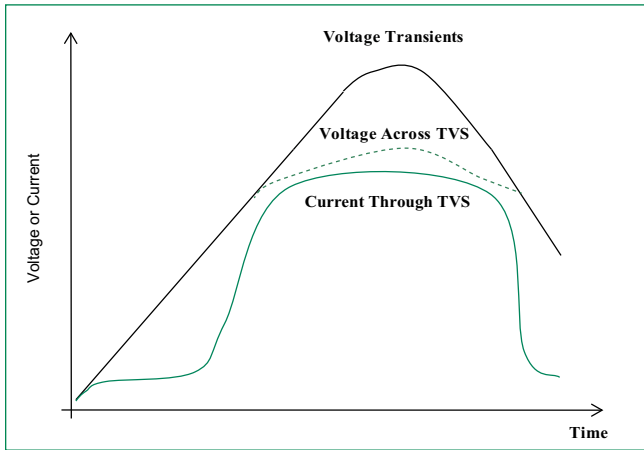


**Figure 2 - Peak Pulse Power Rating Curve**

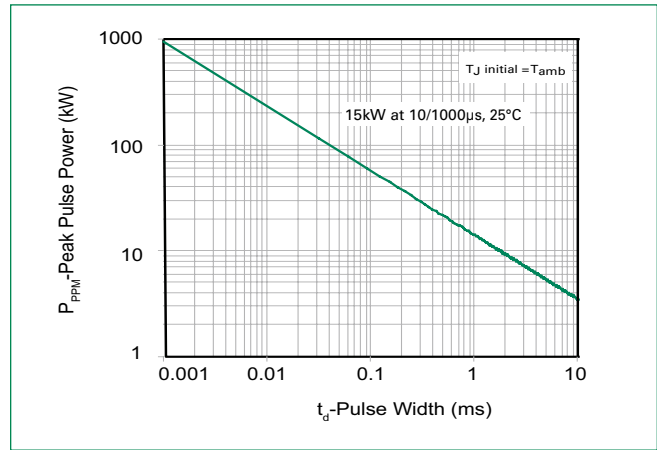


**Ratings and Characteristic Curves** ( $T_A=25^\circ\text{C}$  unless otherwise noted) (Continued)


**Figure 3 - Peak Pulse Power Derating Curve**

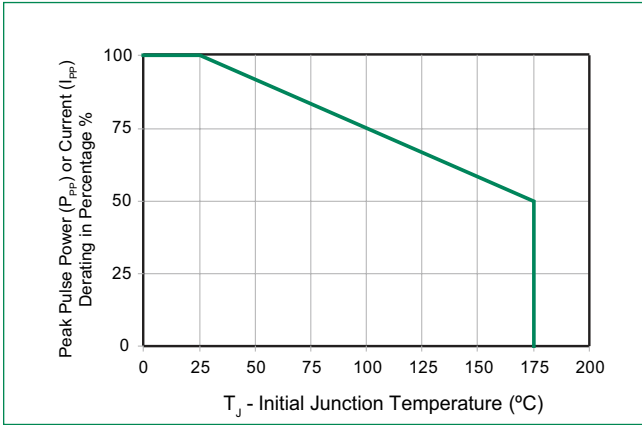


**Figure 4 - Test Pulse Waveform**

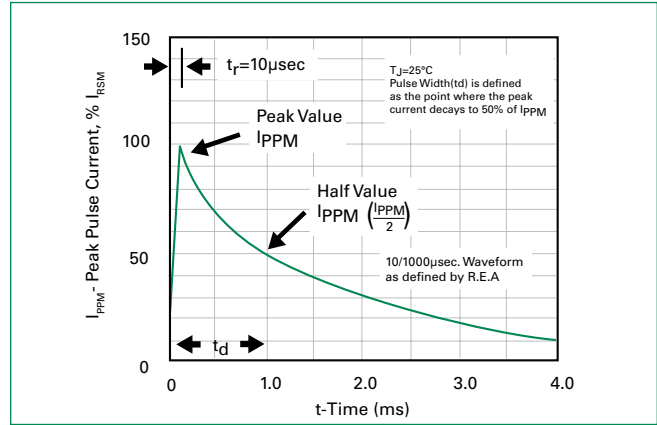


**Figure 5 - Typical Junction Capacitance**

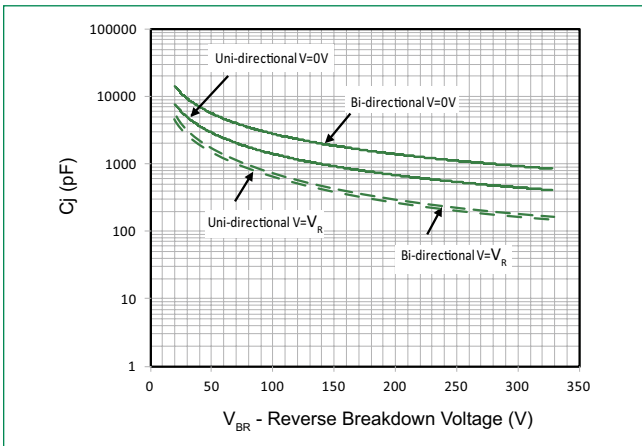


**Figure 6 - Typical Transient Thermal Impedance**

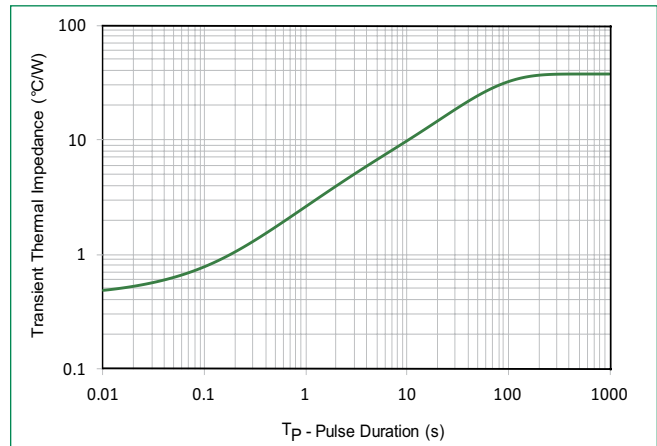

**Figure 7 - Maximum Non-Repetitive Peak Forward Surge Current Uni-Directional Only**

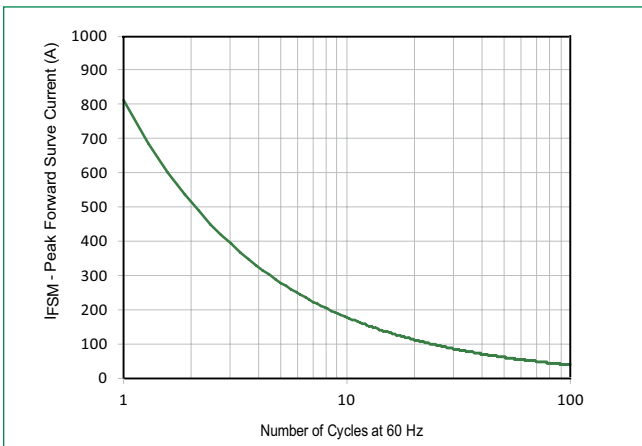


**Figure 8 - Peak Forward Voltage Drop vs Peak Forward Current (Typical Values)**

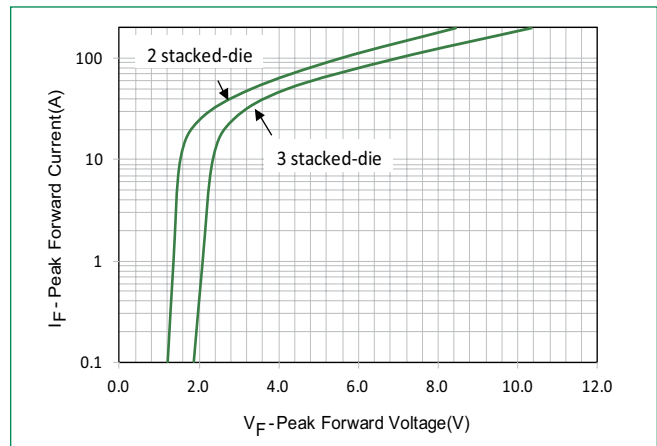

### Soldering Parameters

|                                                                        |                                    |                         |
|------------------------------------------------------------------------|------------------------------------|-------------------------|
| <b>Reflow Condition</b>                                                |                                    | Lead-free assembly      |
| <b>Pre Heat</b>                                                        | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|                                                                        | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|                                                                        | - Time (min to max) ( $t_s$ )      | 60 – 180 secs           |
| <b>Average ramp up rate (Liquidus Temp (<math>T_A</math>) to peak)</b> |                                    | 3°C/second max          |
| <b><math>T_{s(max)}</math> to <math>T_A</math> - Ramp-up Rate</b>      |                                    | 3°C/second max          |
| <b>Reflow</b>                                                          | - Temperature ( $T_A$ ) (Liquidus) | 217°C                   |
|                                                                        | - Time (min to max) ( $t_s$ )      | 60 – 150 seconds        |
| <b>Peak Temperature (<math>T_p</math>)</b>                             |                                    | 260 <sup>+0/-5</sup> °C |
| <b>Time within 5°C of actual peak Temperature (<math>t_p</math>)</b>   |                                    | 20 – 40 seconds         |
| <b>Ramp-down Rate</b>                                                  |                                    | 6°C/second max          |
| <b>Time 25°C to peak Temperature (<math>T_p</math>)</b>                |                                    | 8 minutes Max.          |
| <b>Do not exceed</b>                                                   |                                    | 260°C                   |

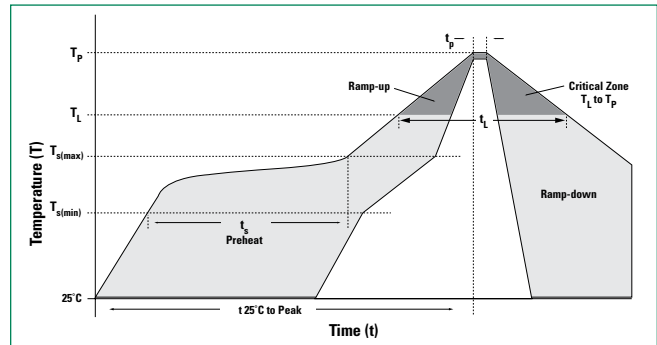

### Flow/Wave Soldering (Solder Dipping)

|                           |            |
|---------------------------|------------|
| <b>Peak Temperature :</b> | 265°C      |
| <b>Dipping Time :</b>     | 10 seconds |
| <b>Soldering :</b>        | 1 time     |


### Physical Specifications

|                 |                                                    |
|-----------------|----------------------------------------------------|
| <b>Weight</b>   | 0.07oz., 2.5g                                      |
| <b>Case</b>     | P600 molded plastic body over passivated junction. |
| <b>Polarity</b> | Color band denotes the cathode except Bipolar.     |
| <b>Terminal</b> | Matte Tin axial leads, solderable per JESD22-B102. |

### Environmental Specifications


|                            |             |
|----------------------------|-------------|
| <b>High Temp. Storage</b>  | JESD22-A103 |
| <b>HTRB</b>                | JESD22-A108 |
| <b>Temperature Cycling</b> | JESD22-A104 |
| <b>H3TRB</b>               | JESD22-A101 |
| <b>RSH</b>                 | JESD22-B106 |

### Dimensions

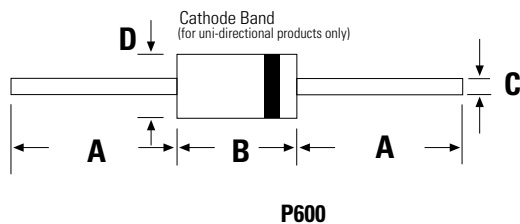


| Dimensions | Inches |       | Millimeters |      |
|------------|--------|-------|-------------|------|
|            | Min    | Max   | Min         | Max  |
| A          | 1.000  | -     | 25.40       | -    |
| B          | 0.340  | 0.360 | 8.60        | 9.10 |
| C          | 0.048  | 0.054 | 1.22        | 1.36 |
| D          | 0.340  | 0.360 | 8.60        | 9.10 |

### Part Numbering System

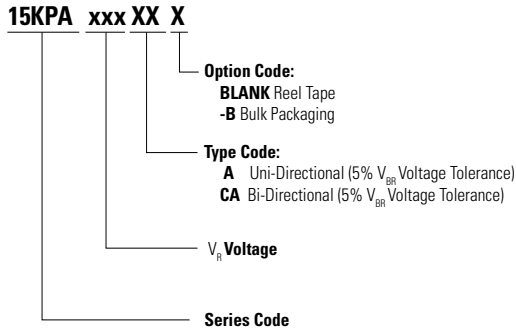


### Part Marking System

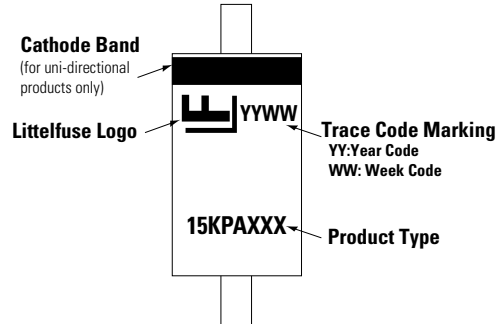

### Packing Options

| Part Number  | Component Package | Quantity | Packaging Option | Packaging Specification |
|--------------|-------------------|----------|------------------|-------------------------|
| 15KPAxxxXX   | P600              | 800      | Tape & Reel      | EIA STD RS-296          |
| 15KPAxxxXX-B | P600              | 100      | Bulk             | Littelfuse Spec.        |

### Tape and Reel Specification

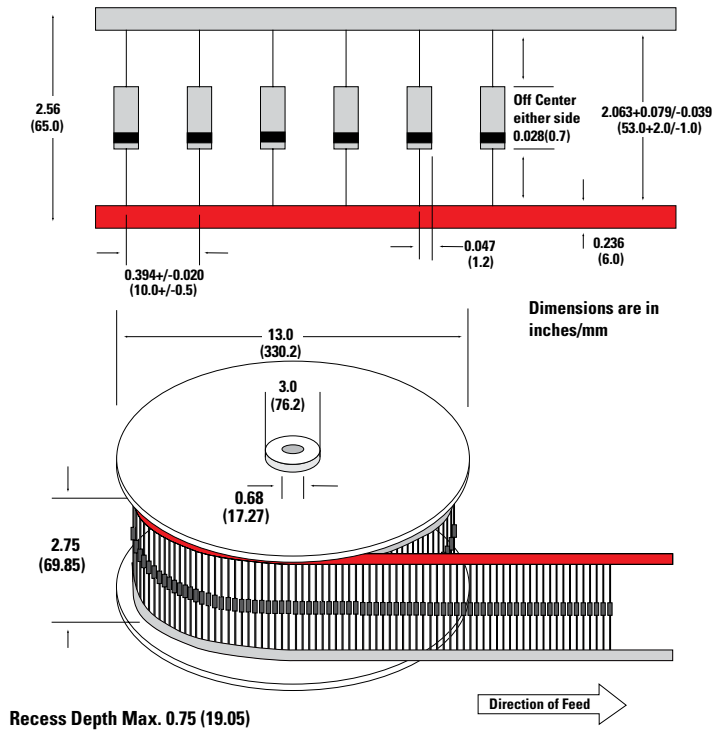

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 15KPA70CA on WIN SOURCE](#)

 [Littelfuse Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management