




THE DATASHEET OF 04025A2R7BAT2A



C0G (NP0) Dielectric, KGM Series

General Specifications



C0G (NP0) is the most popular formulation of the "temperature-compensating," EIA Class I ceramic materials. Modern C0G (NP0) formulations contain neodymium, samarium and other rare earth oxides.

C0G (NP0) ceramics offer one of the most stable capacitor dielectrics available. Capacitance change with temperature is $0 \pm 30 \text{ ppm}/^\circ\text{C}$ which is less than $\pm 0.3\%$ C from -55°C to $+125^\circ\text{C}$. Capacitance drift or hysteresis for C0G (NP0) ceramics is negligible at less than $\pm 0.05\%$ versus up to $\pm 2\%$ for films. Typical capacitance change with life is less than $\pm 0.1\%$ for C0G (NP0), one-fifth that shown by most other dielectrics.

HOW TO ORDER

KGM

Series

General Purpose
Tin/Nickel Finish

21

Size

02 = 0101 32 = 1210
03 = 0201 43 = 1812
05 = 0402 44 = 1825
15 = 0603 55 = 2220
21 = 0805 56 = 2225
31 = 1206

A

Thickness

See Cap Chart

CG

Dielectric

CG = C0G

2J

Voltage

0G = 4.0V 1H = 50V
0J = 6.3V 2A = 100V
1A = 10V 2D = 200V
1C = 16V 2E = 250V
1E = 25V 2H = 500V

102

Capacitance Code Code (in pF)

2 Significant Digits
+Number of zeros
eg. $10\mu\text{F} = 106$
 $10\text{nF} = 103$
 $47\text{pF} = 470$

F

Capacitance Tolerance

B = $\pm 10\text{pF}$ ($<10\text{pF}$)*
C = $\pm 25\text{pF}$ ($<10\text{pF}$)*
D = $\pm 50\text{pF}$ ($<10\text{pF}$)*
F = $\pm 1\%$ ($\geq 10\text{pF}$)*
G = $\pm 2\%$ ($\geq 10\text{pF}$)*
J = $\pm 5\%$ ($\geq 10\text{pF}$)*
K = $\pm 10\%$ ($\geq 10\text{pF}$)*
M = $\pm 20\%$

L

Packaging

See Table Below




PACKAGING CODES


Code	EIA (inch)	IEC(mm)	7" Paper	7" Embossed	13" Paper	13" Embossed
02	0101	0402	H		n/a	
03	0201	0603	H		N	
05	0402	1005	H		N	
15	0603	1608	T		M	
21	0805	2012	T	U	M	L
31	1206	3216	T	U	M	L
32	1210	3225		U		L
43	1812	4532		V		S
44	1825	4564		V		S
55	2220	5750		V		S
56	2225	5763		V		S

*thickness determines paper or plastic embossed packaging


Temperature Coefficient

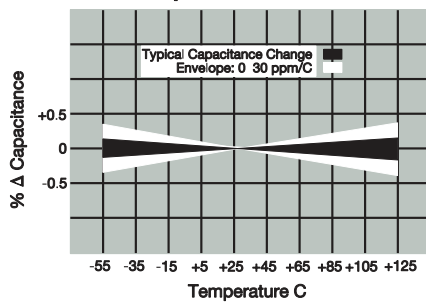


Delta Capacitance vs. Frequency

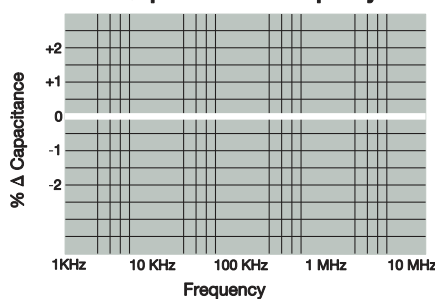


Insulation Resistance vs Temperature

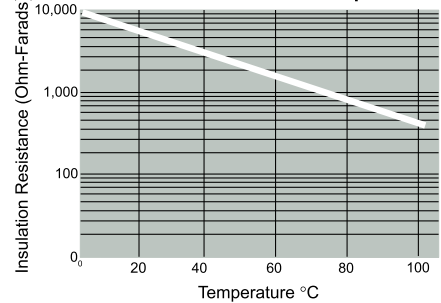


Variation of Impedance with Cap Value
Impedance vs. Frequency
0805 - C0G (NP0)
10 pF vs. 100 pF vs. 1000 pF



Variation of Impedance with Chip Size
Impedance vs. Frequency
1000 pF - C0G (NP0)

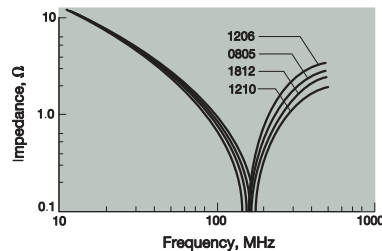

Variation of Impedance with Ceramic Formulation
Impedance vs. Frequency
1000 pF - C0G (NP0) vs X7R
0805

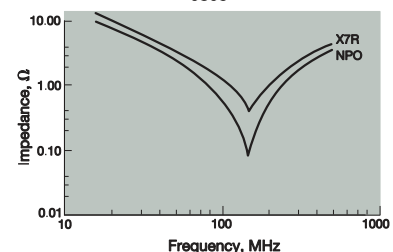


The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.kyocera-avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

TDS-SMDMLCC-0036 | Rev 2

- SURFACE MOUNT CERAMIC CAPACITOR PRODUCTS -

C0G (NP0) Dielectric, KGM Series

Specifications and Test Methods


Parameter/Test		NP0 Specification Limits	Measuring Conditions	
Operating Temperature Range		-55°C to +125°C	Temperature Cycle Chamber	
Capacitance		Within specified tolerance	Freq.: 1.0 MHz $\pm$ 10% for cap $\leq$ 1000 pF	
Q		<30 pF: Q $\geq$ 400+20 x Cap Value $\geq$ 30 pF: Q $\geq$ 1000	1.0 kHz $\pm$ 10% for cap > 1000 pF	
Insulation Resistance		10,000M Ω or 500M Ω - μ F, whichever is less	Voltage: 1.0Vrms $\pm$.2V	
Dielectric Strength		No breakdown or visual defects	Charge device with rated voltage for 60 $\pm$ 5 secs @ room temp/humidity	
Resistance to Flexure Stresses	Appearance	No defects	Deflection: 2mm Test Time: 30 seconds 1mm/sec 	
	Capacitance Variation	$\pm$ 5% or $\pm$.5 pF, whichever is greater		
	Q	Meets Initial Values (As Above)		
	Insulation Resistance	$\geq$ Initial Value x 0.3		
Solderability		$\geq$ 95% of each terminal should be covered with fresh solder	Dip device in eutectic solder at 230 $\pm$ 5°C for 5.0 $\pm$ 0.5 seconds	
Resistance to Solder Heat	Appearance	No defects, <25% leaching of either end terminal	Dip device in eutectic solder at 260°C for 60sec- onds. Store at room temperature for 24 $\pm$ 2 hours before measuring electrical properties.	
	Capacitance Variation	$\leq$ $\pm$ 2.5% or $\pm$.25 pF, whichever is greater		
	Q	Meets Initial Values (As Above)		
	Insulation Resistance	Meets Initial Values (As Above)		
	Dielectric Strength	Meets Initial Values (As Above)		
Thermal Shock	Appearance	No visual defects	Step 1: -55°C $\pm$ 2°	30 $\pm$ 3 minutes
	Capacitance Variation	$\leq$ $\pm$ 2.5% or $\pm$.25 pF, whichever is greater	Step 2: Room Temp	$\leq$ 3 minutes
	Q	Meets Initial Values (As Above)	Step 3: +125°C $\pm$ 2°	30 $\pm$ 3 minutes
	Insulation Resistance	Meets Initial Values (As Above)	Step 4: Room Temp	$\leq$ 3 minutes
	Dielectric Strength	Meets Initial Values (As Above)	Repeat for 5 cycles and measure after 24 hours at room temperature	
Load Life	Appearance	No visual defects	Charge device with twice rated voltage in test chamber set at 125°C $\pm$ 2°C for 1000 hours (+48, -0). Remove from test chamber and stabilize at room temperature for 24 hours before measuring.	
	Capacitance Variation	$\leq$ $\pm$ 3.0% or $\pm$.3 pF, whichever is greater		
	Q (C=Nominal Cap)	$\geq$ 30 pF: Q $\geq$ 350 $\geq$ 10 pF, <30 pF: Q $\geq$ 275 +5C/2 <10 pF: Q $\geq$ 200 +10C		
	Insulation Resistance	$\geq$ Initial Value x 0.3 (See Above)		
	Dielectric Strength	Meets Initial Values (As Above)		
Load Humidity	Appearance	No visual defects	Store in a test chamber set at 85°C $\pm$ 2°C/ 85% $\pm$ 5% relative humidity for 1000 hours (+48, -0) with rated voltage applied. Remove from chamber and stabilize at room temperature for 24 $\pm$ 2 hours before measuring.	
	Capacitance Variation	$\leq$ $\pm$ 5.0% or $\pm$.5 pF, whichever is greater		
	Q	$\geq$ 30 pF: Q $\geq$ 350 $\geq$ 10 pF, <30 pF: Q $\geq$ 275 +5C/2 <10 pF: Q $\geq$ 200 +10C		
	Insulation Resistance	$\geq$ Initial Value x 0.3 (See Above)		
	Dielectric Strength	Meets Initial Values (As Above)		

C0G (NP0) Dielectric, KGM Series

Capacitance Range



SIZE		0101*		0201		0402		0603				0805						1206								
Soldering		Reflow Only		Reflow Only		Reflow/Wave		Reflow/Wave				Reflow/Wave						Reflow/Wave								
Packaging		All Paper		All Paper		All Paper		All Paper				Paper/Embossed						Paper/Embossed								
(L) Length	mm	0.4 ± 0.02		0.60± 0.03		1.0± 0.10		1.60± 0.15				2.01±0.20						3.20±0.20								
	(in.)	(0.016±0.0008)		(0.024± 0.001)		(0.040±0.004)		(0.063± 0.006)				(0.079±0.008)						(0.126±0.008)								
W) Width	mm	0.20±0.02		0.30±0.03		0.50±0.10		0.81±0.15				1.25±0.20						1.60±0.20								
	(in.)	(0.008±0.0008)		(0.011±0.001)		(0.020±0.004)		(0.032±0.006)				(0.049±0.008)						(0.063±0.008)								
(t) Terminal	mm	0.10±0.04		0.15±0.05		0.25±0.15		0.35±0.15				0.50±0.25						0.50±0.25								
	(in.)	(0.004±0.0016)		(0.006±0.002)		(0.010±0.006)		(0.014±0.006)				(0.02±0.010)						(0.020±0.010)								
WVDC		16		25	50	16	25	50	16	25	50	100	200	16	25	50	100	200	250	16	25	50	100	200	250	500
Cap 0.5		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
(pF) 1.0		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
1.2		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
1.5		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
1.8		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
2.2		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
2.7		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
3.3		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
3.9		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
4.7		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
5.6		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
6.8		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
8.2		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
10		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
12		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
15		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
18		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
22		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
27		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
33		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
39		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
47		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
56		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
68		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
82		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
100		A		A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
120				A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	B	B
150				A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	E	B	B	B	B	B	B
180				A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	B	E	B	B	B	B	B	B
220				A	A	A	A	A	A	A	A	A	A	B	B	B	B	B	E	E	B	B	B	B	B	B
270							A	A	A	A	A	A	B	B	B	B	B	B	E	E	B	B	B	B	B	V
330							A	A	A	A	A	A	B	B	B	B	B	B	E	E	B	B	B	B	B	V
390							A	A	A	A	A	A	B	B	B	B	B	B	E	E	B	B	B	B	B	V
470							A	A	A	A	A	A	B	B	B	B	B	B	E	E	B	B	B	B	B	V
560							A	A	A	A	A	A	B	B	B	B	B	B	E	E	B	B	B	B	B	T
680							A	A	A	A	A	A	B	B	B	B	B	B	E	E	B	B	B	B	B	T
820							A	A	A	A	A	A	B	B	B	B	B	B	E	E	B	B	B	B	B	A
1000							A	A	A	A	A	A	B	B	B	B	B	B	E	E	B	B	B	B	B	A
1200										B	B	B	B		B	B	B	B	A	A	B	B	B	B	V	
1500										B	B	B	B		B	B	B	B	A	A	B	B	B	B	T	
1800										B	B	B	B	B	B	B	B	B	A	A	B	B	B	B	D	
2200										B	B	B			A	A	A	A	A	A	B	B	B	B	V	
2700										B	B	B			A	A	A	A	A	A	B	B	B	B	V	
3300										B	B	B			A	A	A	A	A	A	B	V	V	T	D	
3900										B	B	B			A	A	A	A	A	A	B	V	V	T	A	
4700										B	B	B			A	A	A	A	A	A	B	T	T	T	A	
5600															A	A	A	A			B	T	T	A		
6800															A	A	A	A			V	T	T	A		
8200															A	A	A	A			D	A	A	A		
0.010															A	A	A	A			D	A	A	A		
(μF) 0.012																					H	H	H	H		
0.015																					H	H	H	H		
0.018																					H	H	H	H		
0.022																					H	H	H	H		
0.027																					H	H	H	H		
0.033																					H	H	H	H		
0.039																					H	H	H	H		
0.047																					H	H	H	H		
0.068																					H	H	H	H		
0.082																					H	H	H	H		
0.100																					H	H	H	H		
WVDC		16		25	50	16	25	50	16	25	50	100	200	16	25	50	100	200	250	16	25	50	100	200	250	500
SIZE		0101*		0201		0402		0603				0805						1206								



Case Size	0101 (KGM 02)	0201 (KGM03)	0402 (KGM05)	0603 (KGM15)		0805 (KGM21)			1206 (KGM31)					
Thickness Letter	A	A	A	A	B	B	E	A	B	V	T	D	A	H
Max Thickness (mm)	0.22	0.33	0.55	0.90	0.95	0.94	1.35	1.45	0.94	1.22	1.35	1.45	1.80	1.90
Carrier Tape	PAPER	PAPER	PAPER	PAPER	PAPER	PAPER	EMB	EMB	PAPER	EMB	EMB	EMB	EMB	EMB
Packaging Code 7"reel	H	H	H	T	T	T	U	U	T	U	U	U	U	U
Packaging Code 13"reel	n/a	N	N	M	M	M	L	L	M	L	L	L	L	L
	PAPER					EMBOSS (EMB)								

KYOCERA AVX The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.kyocera-avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

TDS-SMDMLCC-0036 | Rev 2


– SURFACE MOUNT CERAMIC CAPACITOR PRODUCTS –

C0G (NP0) Dielectric, KGM Series

Capacitance Range



SIZE		1210					1812					1825			2220			2225		
Soldering		Reflow Only					Reflow Only					Reflow Only			Reflow Only			Reflow Only		
Packaging		All Embossed					All Embossed					All Embossed			All Embossed			All Embossed		
(L)	mm	3.20 ± 0.20					4.50 ± 0.30					4.50 ± 0.30			5.70 ± 0.40			5.72 ± 0.25		
Length	(in.)	(0.126 ± 0.008)					(0.177 ± 0.012)					(0.177 ± 0.012)			(0.225 ± 0.016)			(0.225 ± 0.010)		
(W)	mm	2.50 ± 0.20					3.20 ± 0.20					6.40 ± 0.40			5.00 ± 0.40			6.35 ± 0.25		
Width	(in.)	(0.098 ± 0.008)					(0.126 ± 0.008)					(0.252 ± 0.016)			(0.197 ± 0.016)			(0.250 ± 0.010)		
(t)	mm	0.50 ± 0.25					0.61 ± 0.36					0.61 ± 0.36			0.64 ± 0.39			0.64 ± 0.39		
Terminal	(in.)	(0.020 ± 0.010)					(0.024 ± 0.014)					(0.024 ± 0.014)			(0.025 ± 0.015)			(0.025 ± 0.015)		
WVDC	WVDC	25	50	100	200	500	25	50	100	200	500	50	100	200	50	100	200	50	100	200
	Cap 3.9																			
	(pF) 4.7																			
	5.6																			
	6.8																			
	8.2																			
	10	E	E	E	E	E	B	B	B	B	B									
	12	E	E	E	E	E	B	B	B	B	B									
	15	E	E	E	E	E	B	B	B	B	B									
	18	E	E	E	E	E	B	B	B	B	B									
	22	E	E	E	E	E	B	B	B	B	B									
	27	E	E	E	E	E	B	B	B	B	B									
	33	E	E	E	E	E	B	B	B	B	B									
	39	E	E	E	E	E	B	B	B	B	B									
	47	E	E	E	E	E	B	B	B	B	B									
	56	E	E	E	E	E	B	B	B	B	B									
	68	E	E	E	E	E	B	B	B	B	B									
	82	E	E	E	E	E	B	B	B	B	B									
	100	E	E	E	E	E	B	B	B	B	B									
	120	E	E	E	E	E	B	B	B	B	B									
	150	E	E	E	E	E	B	B	B	B	B									
	180	E	E	E	E	E	B	B	B	B	B									
	220	E	E	E	E	E	B	B	B	B	B									
	270	E	E	E	E	E	B	B	B	B	B									
	330	E	E	E	E	E	B	B	B	B	B									
	390	E	E	E	E	E	B	B	B	B	B									
	470	E	E	E	E	E	B	B	B	B	B									
	560	E	E	E	E	E	B	B	B	B	B									
	680	E	E	E	E	E	B	B	B	B	B									
	820	E	E	E	E	E	B	B	B	B	B									
	1,000	E	E	E	E	E	B	B	B	B	B	C	C	C	Z	Z	Z	D	D	D
	1200	E	E	E	E	E	B	B	B	B	B	C	C	C	Z	Z	Z	D	D	D
	1500	E	E	E	E	E	B	B	B	B	B	C	C	C	Z	Z	Z	D	D	D
	1800	E	E	E	E	E	B	B	B	B	B	C	C	C	Z	Z	Z	D	D	D
	2200	E	E	E	E	E	B	B	B	B	B	C	C	C	Z	Z	Z	D	D	D
	2700	E	E	E	E	E	B	B	B	B	B	C	C	C	Z	Z	Z	D	D	D
	3300	E	E	E	E	E	B	B	B	B	B	C	C	C	Z	Z	Z	D	D	D
	3900	E	E	E	E	E	B	B	B	B	B	C	C	C	Z	Z	Z	D	D	D
	4700	E	E	E	H	H	B	B	B	B	B	C	C	C	Z	Z	Z	D	D	D
	5600	E	E	E	H	H	B	B	B	B	B	C	C	C	Z	Z	Z	D	D	D
	6800	E	E	E	H	H	B	B	B	B	B	C	C	C	Z	Z	Z	D	D	D
	8200	E	E	E	H	H	B	B	B	B	B	C	C	C	Z	Z	Z	D	D	D
	Cap 0.010	E	E	H	J	J	B	B	B	B	B	C	C	C	Z	Z	Z	D	D	D
	(μF) 0.012	H	H	H	J	J	B	B	B	B	B	C	C	C	Z	Z	Z	D	D	D
	0.015	H	H	J	L	L	B	B	B	B	B	C	C	C	Z	Z	Z	D	D	D
	0.018	J	J	L	L		B	B	E	F	F	C	C	C	Z	Z	Z	D	D	D
	0.022	J	J	L	L		B	B	E	F	F	C	C	C	Z	Z	Z	D	D	D
	0.027	L	L	L	L		E	E	F	J		C	C	C	Z	Z	Z	D	D	D
	0.033	L	L	L	L		E	E	F			C	C	C	Z	Z	Z	D	D	D
	0.039	L	L	L			J	J	J			C	C	C	Z	Z	Z	D	D	D
	0.047	L	L	L			J	J	J			C	C	C	Z	Z	C	D	D	D
	0.068						J	J	J			C	C	F	Z	Z	C	D	D	G
	0.082						J	J	J			C	F		Z	C		D	D	G
	0.100						J	J	J			F	F		C	C		D	G	G
WVDC	WVDC	25	50	100	200	500	25	50	100	200	500	50	100	200	50	100	200	50	100	200
SIZE		1210					1812					1825			2220			2225		



Case Size	1210 (KGM 32)				1812 (KGM 43)					1825 (KGM 44)		2220 (KGM 55)			2225 (KGM 56)	
Thickness Letter	E	H	J	L	B	E	F	J	C	F	Z	C	D	G	E	G
Max Thickness (mm)	1.45	1.8	2.21	2.80	1.45	1.8	2.21	2.80	2.21	2.80	2.21	2.80	2.21	2.80	2.29	2.80
Carrier Tape	EMB	EMB	EMB	EMB	EMB	EMB	EMB	EMB	EMB	EMB	EMB	EMB	EMB	EMB	EMB	EMB
Packaging Code 7"reel	U	U	U	U	V	V	V	V	V	V	V	V	V	V	V	V
Packaging Code 13"reel	L	L	L	L	S	S	S	S	S	S	S	S	S	S	S	S
EMBOSSED (EMB)																

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

⊖ View [04025A2R7BAT2A](#) on WIN SOURCE

⊖ [AVX Corp/Kyocera Corp](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management