


BR2477A

BR Coin-type Lithium Battery for high temperature



Features & Benefits

- In addition to the appeal of our BR series coin-type lithium batteries, poly-carbonmonofluoride cells can operate in the temperatures up to 125°C

Applications

Automotive electronic components(TPMS, ETC), hot water and electricity meters, memory backup(host computers, FA equipment), etc.

Specifications


Nominal voltage	3V	
Nominal capacity	1000mAh	
Continuous drain	0.03mA	
Dimensions* ¹	Diameter(Max.)	24.5mm
	Height(Max.)	7.7mm
Weight* ¹	Approx. 7.9g	
Operating temperature	-40°C to +125°C	

*¹ Without tabs.

Terminal types



- Please see the documents for the terminal and lead wire settings.
- [Line up of tab terminal types\(by shape\)](#)
 - [Line up of tab terminal types\(by product number\)](#)

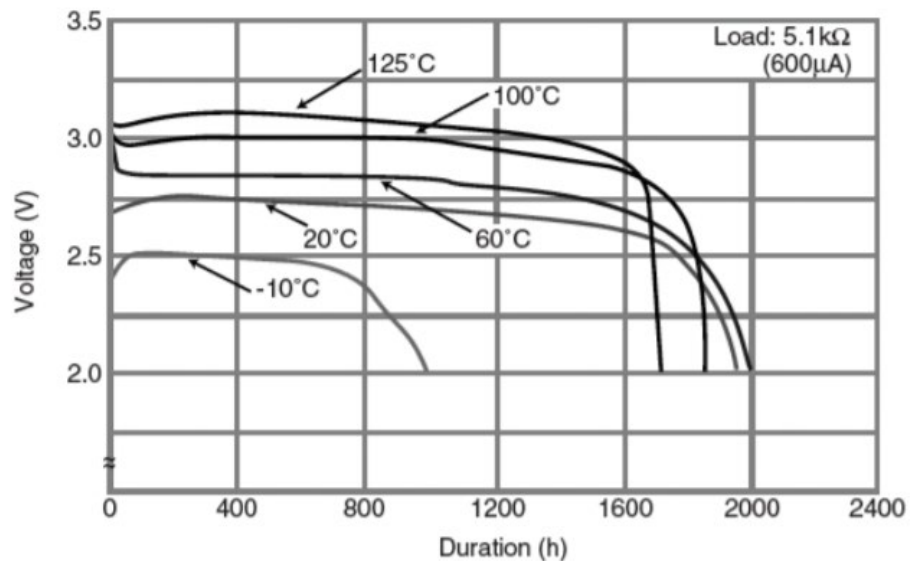Discharge temperature characteristics








Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View BR-2450A/FAN on WIN SOURCE](#)
-  [Panasonic Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management