

## 14 – 42V<sub>IN</sub> ZVS Buck Regulator

### Product Description

The PI332x-00 is a family of high-input-voltage, wide-input-range DC-DC ZVS Buck regulators integrating controller, power switches and support components all within a high-density System-in-Package (SiP).

The integration of a high-performance Zero-Voltage Switching (ZVS) topology, within the PI332x-00 series, increases point-of-load performance providing best-in-class power efficiency. The PI332x-00 requires only an external inductor, two voltage selection resistors and minimal capacitors to form a complete DC-DC switch-mode buck regulator.

Device	Output Voltage		I <sub>OUT</sub> Max
	Set	Range	
<a href="#">PI3323-00</a>	3.3V	2.2 – 4.0V	22A
<a href="#">PI3325-00</a>	5.0V	4.0 – 6.5V	20A



### Features & Benefits

- High-Efficiency HV ZVS Buck Topology
- Wide input voltage range of 14 – 42V
- Power-up into pre-biased load
- Parallel capable with single-wire current sharing
- Input Over/Undervoltage Lockout (OVLO/UVLO)
- Output Overvoltage Protection (OVP)
- Overtemperature Protection (OTP)
- Fast and slow current limits
- Differential amplifier for output remote sensing
- User-adjustable soft start & tracking
- –40 to 120°C operating range (T<sub>INT</sub>), -LGIZ models
- –55 to 120°C operating range (T<sub>INT</sub>), -LGMZ models

### Applications

- HV to PoL Buck Regulator Applications
- Computing, Communications, Industrial, Automotive Equipment

### Package Information

- 10 x 14 x 2.56mm LGA SiP

Note: Product images may not highlight current product markings and cosmetic features.

## Contents

<a href="#">Order Information</a>	<a href="#">3</a>	<a href="#">Application Description</a>	<a href="#">27</a>
<a href="#">Thermal, Storage and Handling Information</a>	<a href="#">3</a>	<a href="#">Output Voltage Set Point</a>	<a href="#">27</a>
<a href="#">Absolute Maximum Ratings</a>	<a href="#">3</a>	<a href="#">Soft Start Adjust and Tracking</a>	<a href="#">27</a>
<a href="#">Functional Block Diagram</a>	<a href="#">4</a>	<a href="#">Inductor Pairing</a>	<a href="#">28</a>
<a href="#">Pin Description</a>	<a href="#">5</a>	<a href="#">Parallel Operation</a>	<a href="#">28</a>
<a href="#">Package Pinout</a>	<a href="#">6</a>	<a href="#">Filter Considerations</a>	<a href="#">28</a>
<a href="#">Common Electrical Characteristics</a>	<a href="#">7</a>	<a href="#">VDR Bias Regulator</a>	<a href="#">29</a>
<a href="#">PI3323-00-LGMZ (3.3V<sub>OUT</sub>) Electrical Characteristics</a>	<a href="#">8</a>	<a href="#">Layout Guidelines</a>	<a href="#">30</a>
<a href="#">PI3325-00-LGIZ (5.0V<sub>OUT</sub>) Electrical Characteristics</a>	<a href="#">15</a>	<a href="#">LGA Recommended PCB Footprint and Stencil</a>	<a href="#">31</a>
<a href="#">Functional Description</a>	<a href="#">22</a>	<a href="#">LGA Package Drawings</a>	<a href="#">32</a>
<a href="#">ENABLE (EN)</a>	<a href="#">22</a>	<a href="#">Revision History</a>	<a href="#">33</a>
<a href="#">Remote Sensing</a>	<a href="#">22</a>	<a href="#">Warranty</a>	<a href="#">34</a>
<a href="#">Soft Start</a>	<a href="#">22</a>		
<a href="#">Output Voltage Selection</a>	<a href="#">22</a>		
<a href="#">Output Current Limit Protection</a>	<a href="#">22</a>		
<a href="#">Input Undervoltage Lockout</a>	<a href="#">22</a>		
<a href="#">Input Overvoltage Lockout</a>	<a href="#">23</a>		
<a href="#">Output Overvoltage Protection</a>	<a href="#">23</a>		
<a href="#">Overtemperature Protection</a>	<a href="#">23</a>		
<a href="#">Pulse Skip Mode (PSM)</a>	<a href="#">23</a>		
<a href="#">Variable Frequency Operation</a>	<a href="#">23</a>		
<a href="#">Thermal Characteristics</a>	<a href="#">23</a>		
<a href="#">SiP Power Dissipation as Percentage of Total System Losses</a>	<a href="#">26</a>		

## Order Information

Product	Nominal Output Voltage	Rated Output Current	Temperature Range	Package	Transport Media
PI3323-00-LGMZ	3.3V	22A	-55 to 120°C	10 x 14mm LGA	TRAY
PI3325-00-LGIZ	5.0V	20A	-40 to 120°C		

## Thermal, Storage and Handling Information


Name	Rating	
Storage Temperature	-65 to 150°C	
Internal Operating Temperature	-LGIZ	-40 to 120°C
	-LGMZ	-55 to 120°C
Soldering Temperature for 20 seconds	245°C	
MSL Rating	3	
ESD Rating, JESD22-A114F, JESD22-C101F	2kV HBM; 1kV CDM, respectively	

## Absolute Maximum Ratings

Name	Rating
VIN	-0.7 to 55V
VS1	-0.7V <sub>DC</sub> to 55V
VOUT	-0.5 to 25V
SGND	±100mA
TRK	-0.3 to 5.5V, ±30mA
VDR, SYNCI, SYNCO, PWRGD, EN, COMP, EAO, EAIN, VDIFF, VSN, VSP, TESTx	-0.3 to 5.5V, ±5mA

**Notes:** Stresses beyond these limits may cause permanent damage to the device. Operation at these conditions or conditions beyond those listed in the Electrical Specifications table is not guaranteed. All voltages are referenced to PGND unless otherwise noted.

Functional Block Diagram

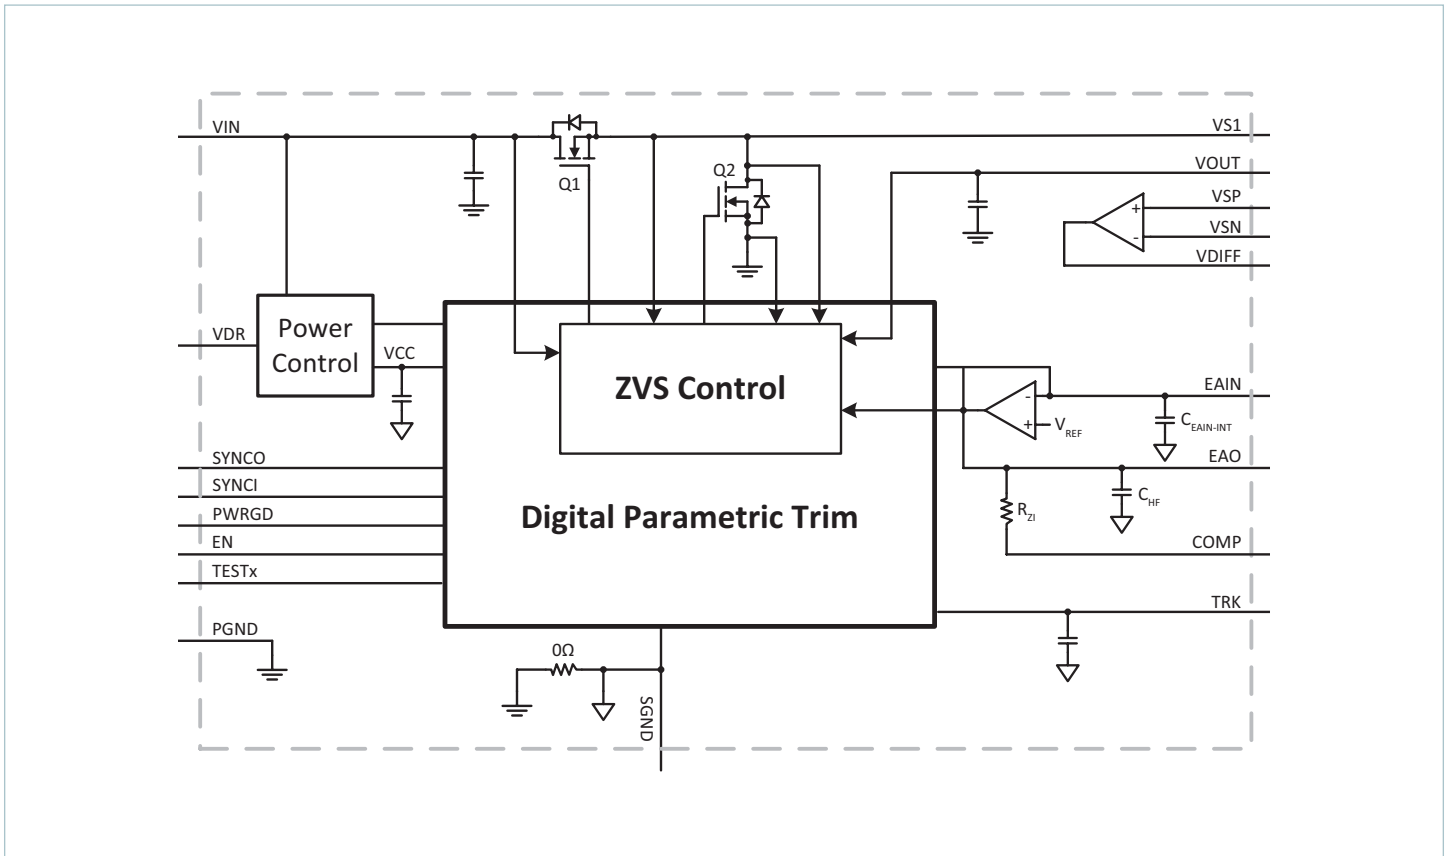


Simplified block diagram

## Pin Description

Name	Location	I/O	Description
VS1	Block 1	Power	<b>Switching Node:</b> and ZVS sense for power switches.
VIN	Block 3	Power	<b>Input Voltage:</b> and sense for UVLO, OVLO and feed forward ramp.
VDR	5K	I/O	<b>Gate Driver VCC:</b> Internally generated 5.1V. May be used as a bias supply for low power external loads. See Application Description for important considerations.
SYNCI	4K	I	<b>Synchronization Input:</b> Synchronize to the falling edge of external clock frequency. SYNCI is a high impedance digital input node and should always be connected to SGND when not in use. The PI3325-00 family is not optimized for external synchronization functionality. Refer to Application Description of Parallel Operation for details.
SYNCO	3K	O	<b>Synchronization Output:</b> Outputs a high signal at the start of each clock cycle for the longer of ½ of the minimum period or the on time of the high-side power MOSFET.
TEST1	2K	I/O	<b>Test Connections:</b> Use only with factory guidance. Connect to SGND for proper operation.
TEST2	1K	I/O	<b>Test Connections:</b> Use only with factory guidance. Connect to SGND for proper operation.
TEST3	1J	I/O	<b>Test Connections:</b> Use only with factory guidance. Connect to SGND for proper operation.
TEST4	1H	I/O	<b>Test Connections:</b> Use only with factory guidance. Connect to SGND for proper operation.
TEST5	1E	I/O	<b>Test Connections:</b> Use only with factory guidance. Connect to SGND for proper operation.
PWRGD	1G	O	<b>Power Good:</b> High impedance when regulator is operating and V <sub>OUT</sub> is in regulation. Otherwise pulls to SGND.
EN	1F	I/O	<b>Enable Input:</b> Regulator enable control. When asserted active or left floating: regulator is enabled. Otherwise regulator is disabled.
SGND	Block 5		<b>Signal Ground:</b> Internal logic ground for EA, TRK, SYNCI, SYNCO communication returns. SGND and PGND are star connected within the regulator package.
TRK	1C	I	<b>Soft Start and Track Input:</b> An external capacitor may be connected between TRK pin and SGND to increase the rise time of the internal reference during soft start.
COMP	1B	O	<b>Compensation Capacitor:</b> Connect capacitor for control loop dominant pole. See Error Amplifier section for details. A default C <sub>COMP</sub> of 4.7nF is used in the example.
EAO	1A	O	<b>Error Amp Output:</b> External connection for additional compensation and current sharing.
EAIN	2A	I	<b>Error Amp Inverting Input:</b> Connection for the main V <sub>out</sub> feedback divider tap
VDIFF	3A	O	<b>Independent Amplifier Output:</b> Active only when module is enabled.
VSN	4A	I	<b>Independent Amplifier Inverting Input:</b> If unused connect in unity gain.
VSP	5A	I	<b>Independent Amplifier Non-Inverting Input:</b> If unused connect to SGND.
VOUT	6A,B	Power	<b>Direct V<sub>OUT</sub> Connect:</b> for per-cycle internal clamp node and feed-forward ramp.
PGND	Block2	Power	<b>Power Ground:</b> V <sub>IN</sub> and V <sub>OUT</sub> power returns.

Package Pinout

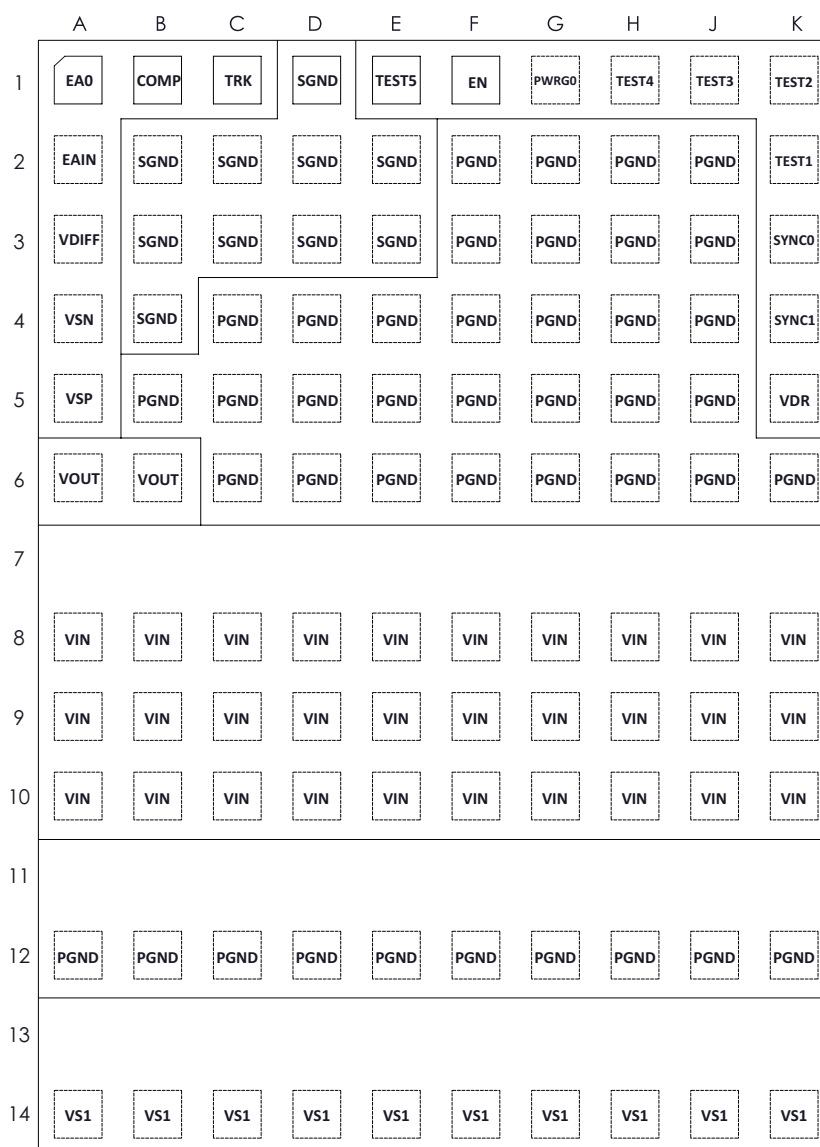

TOP THROUGH VIEW OF PRODUCT

10x14mm SiP

Pin Block Name	Group of pins
VIN	A8-10, B8-10, C8-10, D8-10, E8-10, F8-10, G8-10, H8-10, J8-10, K8-10
VS1	A14, B14, C14, D14, E14, F14, G14, H14, J14, K14
PGND	A12, B12, C12, D12, E12, F12, G12, H12, J12, K12
PGND	B5, C4-6, D4-6, E4-6, F2-6, G2-6, H2-6, J2-6, K6
VOUT	A6, B6
SGND	B2-4, C2-3, D1-3, E2-3

## Common Electrical Characteristics

Specifications apply for  $-40^{\circ}\text{C} < T_{\text{INT}} < 120^{\circ}\text{C}$  for -LGIZ,  $-55^{\circ}\text{C} < T_J < 115^{\circ}\text{C}$  for -LGMZ  $V_{\text{IN}} = 24\text{V}$ , EN = High, unless otherwise noted.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
<b>Differential Amp</b>						
Open Loop Gain		[b]	96	120	140	dB
Small Signal Gain-Bandwidth		[b]	5	7	12	MHz
Input Offset				0.5	1	mV
Common Mode Input Range			-0.1		2.5	V
Differential Mode Input Range					2	V
Input Bias Current			-1		1	$\mu\text{A}$
Output Current			-1		1	mA
Maximum $V_{\text{OUT}}$		$I_{\text{VDIFF}} = -1\text{mA}$	4.85			V
Minimum $V_{\text{OUT}}$		$I_{\text{VDIFF}} = -1\text{mA}$			20	mV
Capacitive Load Range for Stability		[b]	0		50	pF
Slew Rate				11		V/ $\mu\text{s}$
<b>PWRGD</b>						
$V_{\text{OUT}}$ Rising Threshold	$V_{\text{PG\_HI\%}}$		78	84	90	% $V_{\text{OUT\_DC}}$
$V_{\text{OUT}}$ Falling Threshold	$V_{\text{PG\_LO\%}}$		75	81	87	% $V_{\text{OUT\_DC}}$
PWRGD Output Low	$V_{\text{PG\_SAT}}$	Sink = 4mA			0.4	V
<b>VDR</b>						
Voltage Setpoint	$V_{\text{VDR}}$	$V_{\text{IN\_DC}} > 10\text{V}$	4.9	5.05	5.2	V
External Loading	$I_{\text{VDR}}$	See Application Description for details	0		2	mA
<b>Enable</b>						
High Threshold	$V_{\text{EN\_HI}}$		0.9	1.0	1.1	V
Low Threshold	$V_{\text{EN\_LO}}$		0.7	0.8	0.9	V
Threshold Hysteresis	$V_{\text{EN\_HYS}}$		100	200	300	mV
Pull Up Voltage Level for Source Current	$V_{\text{EN\_PU}}$			2		V
Pull Up Current	$I_{\text{EN\_PU\_POS}}$	$V_{\text{IN}} > 8\text{V}$ , excluding $t_{\text{FR\_DLY}}$		50		$\mu\text{A}$
<b>Reliability</b>						
MTBF		MIL-HDBK-217, 25°C, Ground Benign: GB		14.6		MHrs
		Telcordia SR-332, 25°C, Ground Benign: GB		201		MHrs

[a] All parameters reflect regulator and inductor system performance. Measurements were made using a standard PI3325 evaluation board with 3 x 3" dimensions and four-layer, 2oz copper. Refer to inductor pairing table within Application Description section for specific inductor manufacturer and value.

[b] Regulator is assured to meet performance specifications by design, test correlation, characterization, and/or statistical process control.

Output voltage is determined by an external feedback divider ratio.

[c] Output current capability may be limited and other performance may vary from noted electrical characteristics when  $V_{\text{OUT}}$  is not set to nominal.

[d] Refer to Output Ripple plots.

[e] Refer to Load Current vs. Ambient Temperature curves.

[f] Refer to Switching Frequency vs. Load current curves.

PI3323-00-LGMZ (3.3V<sub>OUT</sub>) Electrical Characteristics

Specifications apply for  $-55^{\circ}\text{C} < T_J < 115^{\circ}\text{C}$ ,  $V_{IN} = 24\text{V}$ , EN = High, unless otherwise noted.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
<b>Input Specifications</b>						
Input Voltage	$V_{IN\_DC}$		14	24	42	V
Input Current	$I_{IN\_DC}$	$V_{IN} = 24\text{V}$ , $T_{CASE} = 25^{\circ}\text{C}$ , $I_{OUT} = 22\text{A}$		3.35		A
Input Current At Output Short (Fault Condition Duty Cycle)	$I_{IN\_Short}$	Short at terminals		5		mA
Input Quiescent Current	$I_{Q\_VIN}$	Disabled		0.94	1.6	mA
Input Quiescent Current	$I_{Q\_VIN}$	Enabled, no load, $T_{CASE} = 25^{\circ}\text{C}$		3.2		mA
Input Voltage Slew Rate	$V_{IN\_SR}$	[b]			1	V/ $\mu\text{s}$
Input capacitance, Internal	$C_{IN\_INT}$	Effective value $V_{IN} = 24\text{V}$ , $25^{\circ}\text{C}$		0.7		$\mu\text{F}$
<b>Output Specifications</b>						
EAIN Voltage Total Regulation	$V_{EAIN}$	[b]	0.975	0.990	1.005	V
Output Voltage Trim Range	$V_{OUT\_DC}$	[b] [c]	2.2	3.3	4.0	V
Line Regulation	$\Delta V_{OUT} / \Delta V_{IN}$	At $25^{\circ}\text{C}$ , $14\text{V} < V_{IN} < 42\text{V}$		0.10		%
Load Regulation	$\Delta V_{OUT} / \Delta I_{OUT}$	At $25^{\circ}\text{C}$ , $2\text{A} < I_{OUT} < 20\text{A}$		0.10		%
Output Voltage Ripple	$V_{OUT\_AC}$	$I_{OUT} = 20\text{A}$ , $C_{OUT} = 8 \times 100\mu\text{F}$ , 20MHz BW [d]		67		mV <sub>P-P</sub>
Output Current	$I_{OUT\_DC}$	[e]	0		22	A
Current Limit	$I_{OUT\_CL}$	Typical current limit based on nominal 230nH inductor.		25.1		A
Maximum Array Size	$N_{PARALLEL}$	[b]			3	Modules
Output Current, Array of 2	$I_{OUT\_DC\_ARRAY2}$	Total array capability, [b] see applications section for details	0		[g]	A
Output Current, Array of 3	$I_{OUT\_DC\_ARRAY3}$	Total array capability, [b] see applications section for details	0		[g]	A
<b>Protection</b>						
Input UVLO Start Threshold	$V_{UVLO\_START}$			12.9	13.8	V
Input UVLO Stop Hysteresis	$V_{UVLO\_HYS}$		0.85	1.21	1.75	V
Input UVLO Response Time				1.25		$\mu\text{s}$
Input OVLO Stop Threshold	$V_{OVLO}$		44	47		V
Input OVLO Start Hysteresis	$V_{OVLO\_HYS}$	Hysteresis active when OVLO present for at least $t_{FR\_DLY}$	0.5	0.9	1.3	V
Input OVLO Response Time	$t_f$			1.25		$\mu\text{s}$
Output Overvoltage Protection, Relative	$V_{OVP\_REL}$	Above set $V_{OUT}$		20		%
Output Overvoltage Protection, Absolute	$V_{OVP\_ABS}$		4.3	4.7		V

[a] All parameters reflect regulator and inductor system performance. Measurements were made using a standard PI3325 evaluation board with 3 x 3" dimensions and four-layer, 2oz copper. Refer to inductor pairing table within Application Description section for specific inductor manufacturer and value.

[b] Regulator is assured to meet performance specifications by design, test correlation, characterization, and/or statistical process control.

Output voltage is determined by an external feedback divider ratio.

[c] Output current capability may be limited and other performance may vary from noted electrical characteristics when  $V_{OUT}$  is not set to nominal.

[d] Refer to Output Ripple plots.

[e] Refer to Load Current vs. Ambient Temperature curves.

[f] Refer to Switching Frequency vs. Load current curves.

[g] Contact factory applications for array derating and layout best practices to minimize sharing errors.

PI3323-00-LGMZ (3.3V<sub>OUT</sub>) Electrical Characteristics (Cont.)

Specifications apply for  $-55^{\circ}\text{C} < T_J < 115^{\circ}\text{C}$ ,  $V_{IN} = 24\text{V}$ , EN = High, unless otherwise noted.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
<b>Timing</b>						
Switching Frequency	$f_s$	<sup>[f]</sup> While in Discontinuous Conduction Mode (DCM) only, SYNCI grounded	470	500	530	kHz
Fault Restart Delay	$t_{FR\_DLY}$			30		ms
<b>Synchronization Input (SYNCI)</b>						
Synchronization Frequency Range	$f_{SYNCI}$	-50% and +10% relative to set switching frequency ( $f_s$ ), while in DCM operating mode only. <sup>[c]</sup> and <sup>[f]</sup>	250		550	kHz
SYNCI Threshold	$V_{SYNCI}$			2.5		V
<b>Synchronization Output (SYNCO)</b>						
SYNCO High	$V_{SYNCO\_HI}$	Source 1mA	4.5			V
SYNCO Low	$V_{SYNCO\_LO}$	Sink 1mA			0.5	V
SYNCO Rise Time	$t_{SYNCO\_RT}$	20pF load		10		ns
SYNCO Fall Time	$t_{SYNCO\_FT}$	20pF load		10		ns
<b>Soft Start, Tracking and Error Amplifier</b>						
TRK Active Range (Nominal)	$V_{TRK}$		0		1.4	V
TRK Enable Threshold	$V_{TRK\_OV}$		20	40	60	mV
TRK to EAIN Offset	$V_{EAIN\_OV}$		40	80	120	mV
Charge Current (Soft Start)	$I_{TRK}$		30	50	70	$\mu\text{A}$
Discharge Current (Fault)	$I_{TRK\_DIS}$	$V_{TRK} = 0.5\text{V}$		8.7		mA
TRK Capacitance, Internal	$C_{TRK\_INT}$			47		nF
Soft-Start Time	$t_{SS}$	$C_{TRK\_EXT} = 0\mu\text{F}$	0.6	0.94	1.6	ms
Error Amplifier Transconductance	$G_{MEAO}$			5.06		mS
PSM Skip Threshold	$PSM_{SKIP}$			0.6		V
EAIN Capacitance, Internal	$C_{EAIN\_INT}$			56		pF
Error Amplifier Output Impedance	$R_{OUT}$	<sup>[b]</sup>	1			M $\Omega$
Internal Compensation Capacitor	$C_{HF}$			56		pf
Internal Compensation Resistor	$R_{ZI}$			5		k $\Omega$

<sup>[a]</sup> All parameters reflect regulator and inductor system performance. Measurements were made using a standard PI3325 evaluation board with 3 x 3" dimensions and four-layer, 2oz copper. Refer to inductor pairing table within Application Description section for specific inductor manufacturer and value.

<sup>[b]</sup> Regulator is assured to meet performance specifications by design, test correlation, characterization, and/or statistical process control.

Output voltage is determined by an external feedback divider ratio.

<sup>[c]</sup> Output current capability may be limited and other performance may vary from noted electrical characteristics when  $V_{OUT}$  is not set to nominal.

<sup>[d]</sup> Refer to Output Ripple plots.

<sup>[e]</sup> Refer to Load Current vs. Ambient Temperature curves.

<sup>[f]</sup> Refer to Switching Frequency vs. Load current curves.

PI3323-00-LGMZ (3.3V<sub>OUT</sub>) Electrical Characteristics (Cont.)

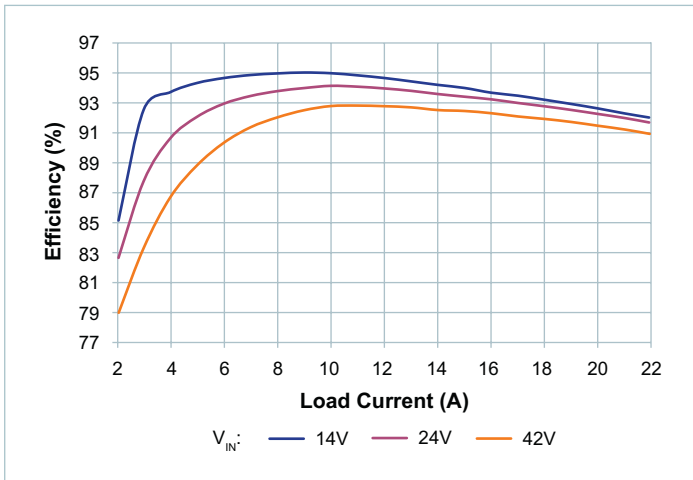


Figure 1 — System efficiency, nominal trim, board temperature = 25°C

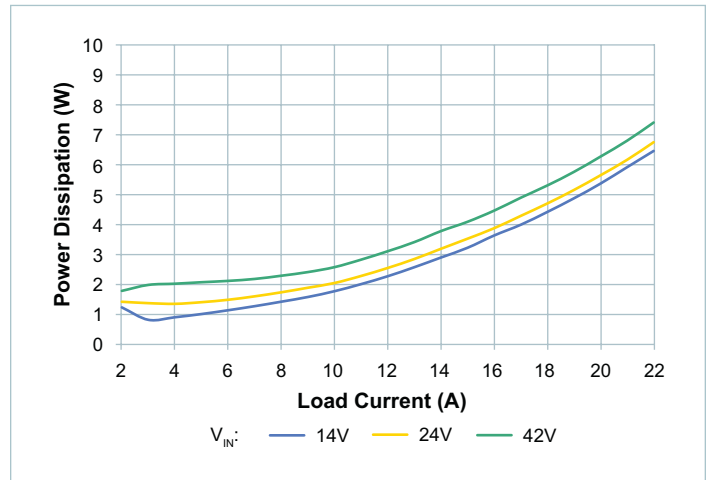


Figure 4 — System power dissipation, nominal trim, board temperature = 25°C

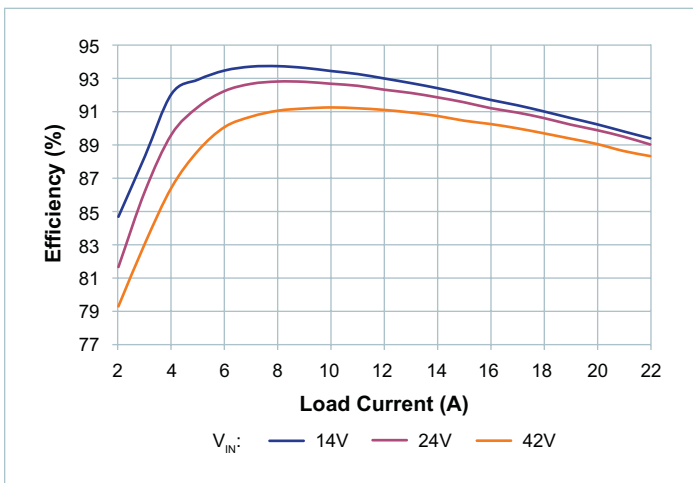


Figure 2 — System efficiency, low trim, board temperature = 25°C

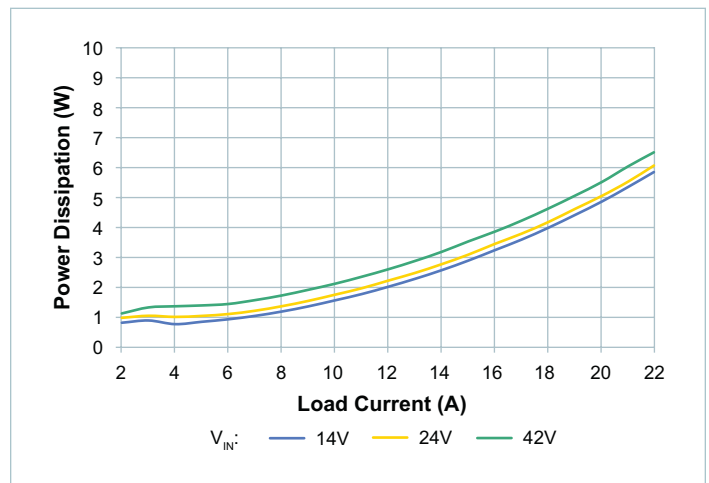


Figure 5 — System power dissipation, low trim, board temperature = 25°C

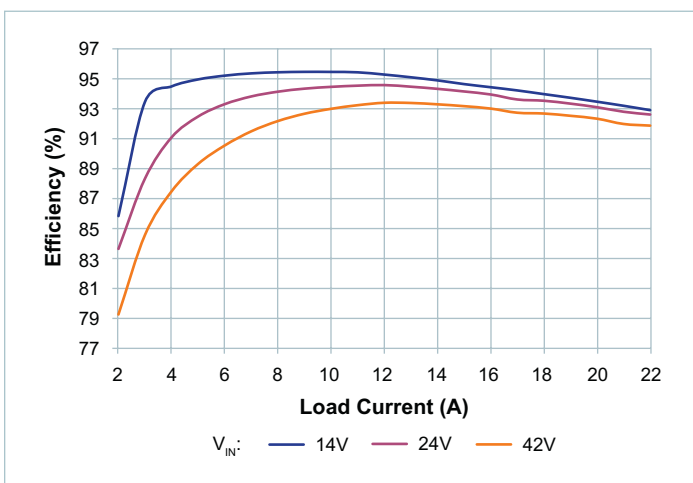


Figure 3 — System efficiency, high trim, board temperature = 25°C

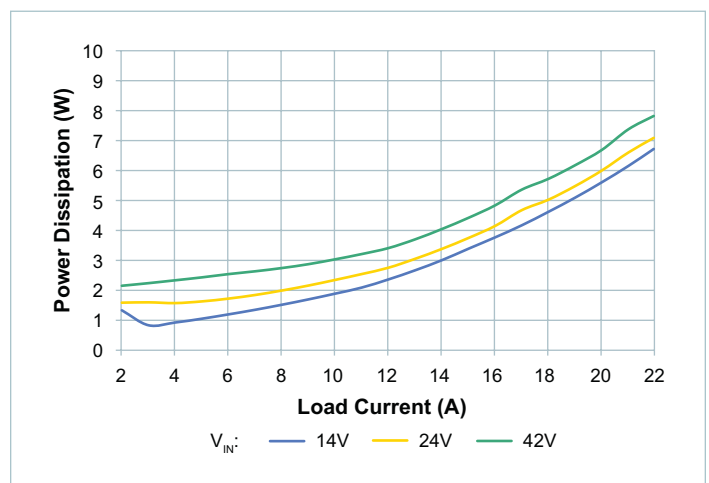


Figure 6 — System power dissipation, high trim, board temperature = 25°C

PI3323-00-LGMZ (3.3V<sub>OUT</sub>) Electrical Characteristics (Cont.)

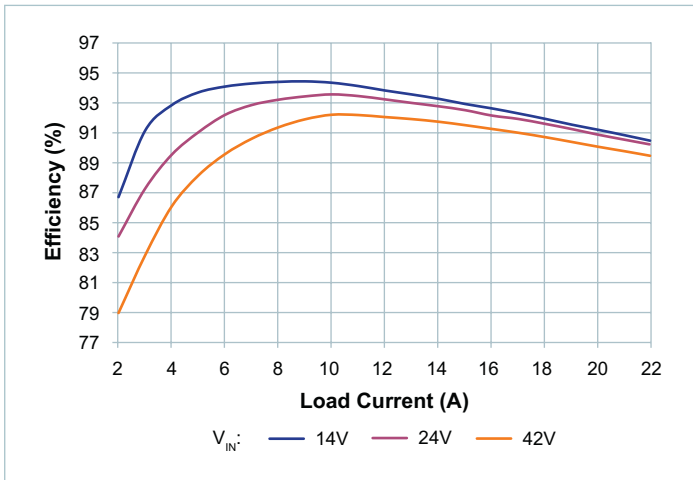


Figure 7 — System efficiency, nominal trim, board temperature = 90°C

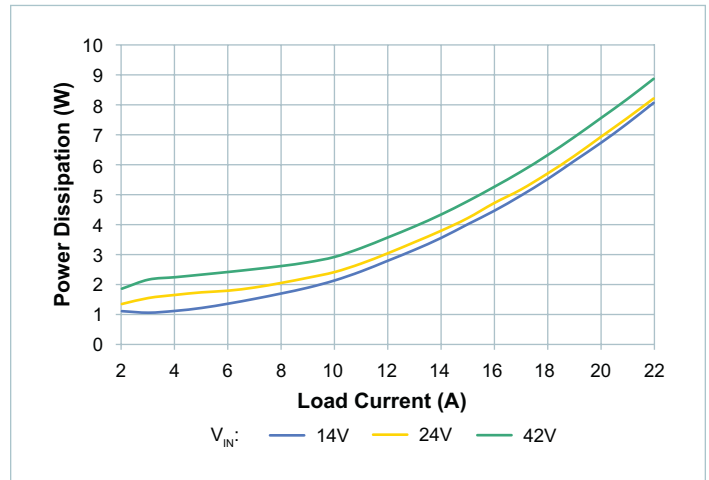


Figure 10 — System power dissipation, nominal trim, board temperature = 90°C

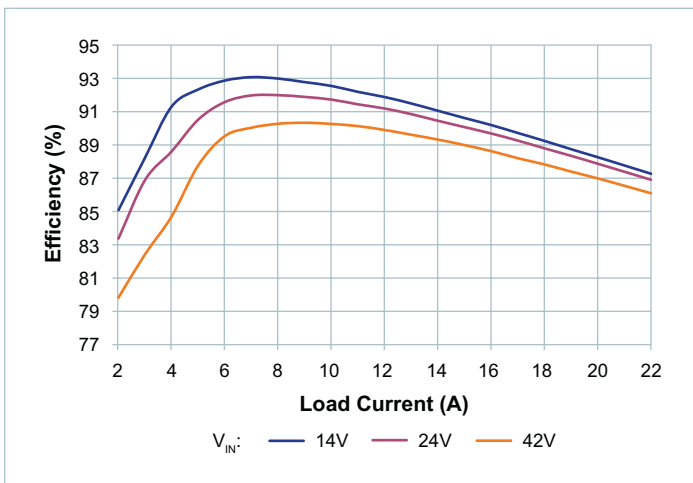


Figure 8 — System efficiency, low trim, board temperature = 90°C

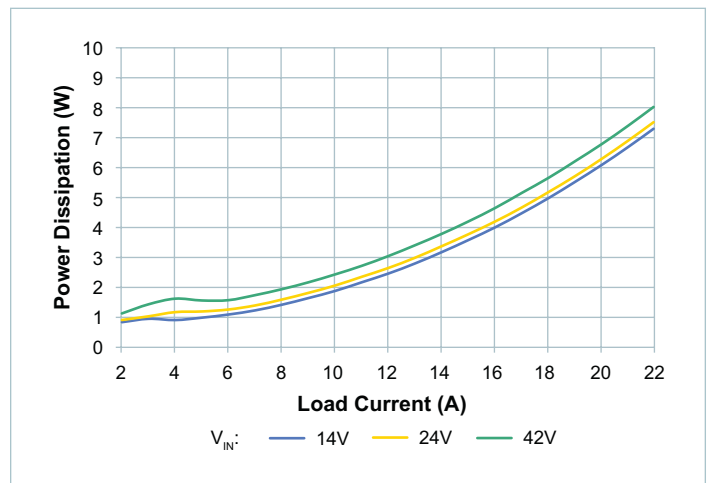


Figure 11 — System power dissipation, low trim, board temperature = 90°C

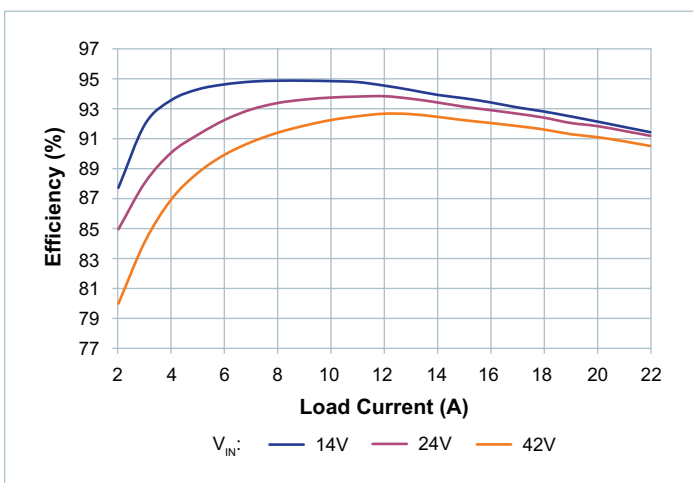


Figure 9 — System efficiency, high trim, board temperature = 90°C

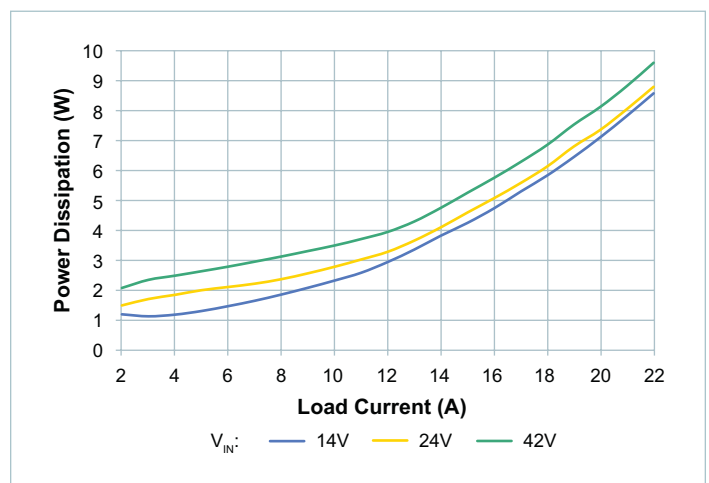


Figure 12 — System power dissipation, high trim, board temperature = 90°C

PI3323-00-LGMZ (3.3V<sub>OUT</sub>) Electrical Characteristics (Cont.)

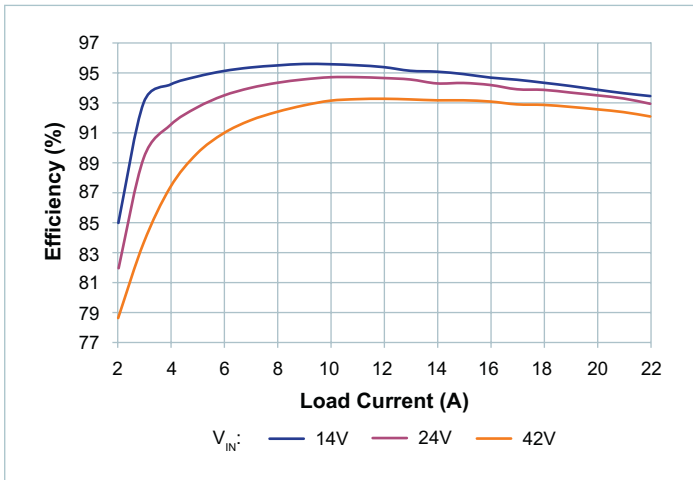


Figure 13 — System efficiency, nominal trim, board temperature = -40°C

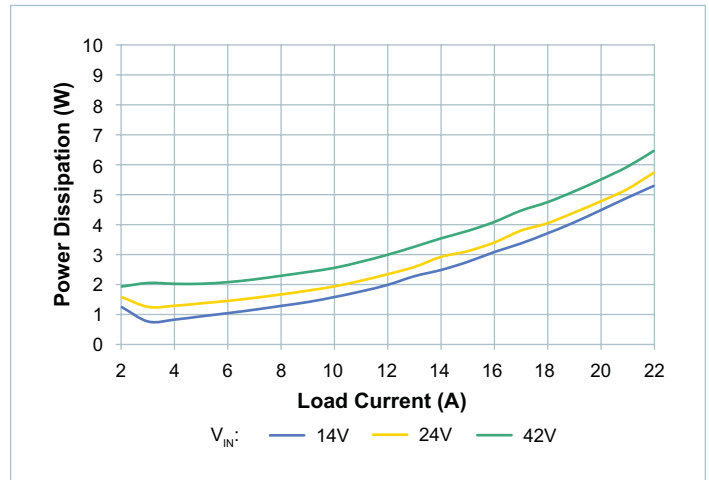


Figure 16 — System power dissipation, nominal trim, board temperature = -40°C

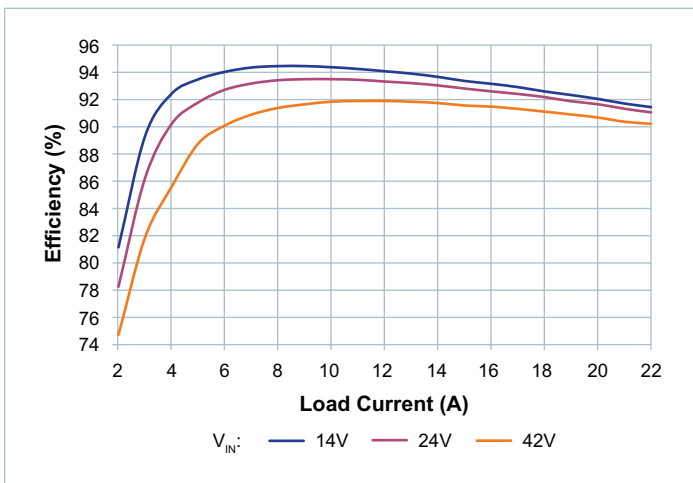


Figure 14 — System efficiency, low trim, board temperature = -40°C

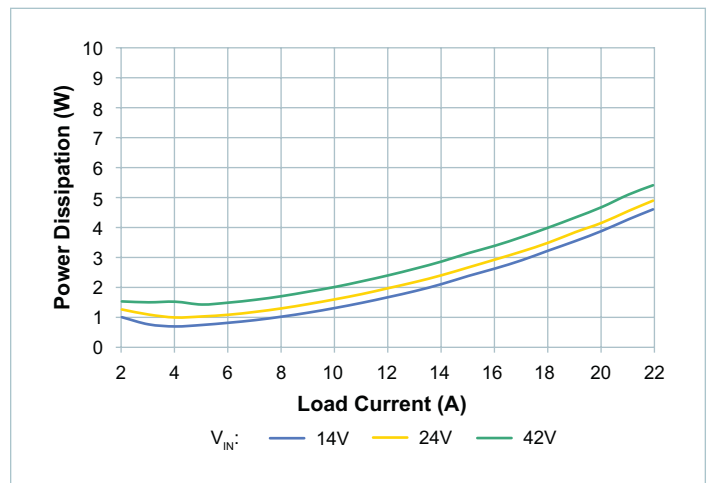


Figure 17 — System power dissipation, low trim, board temperature = -40°C

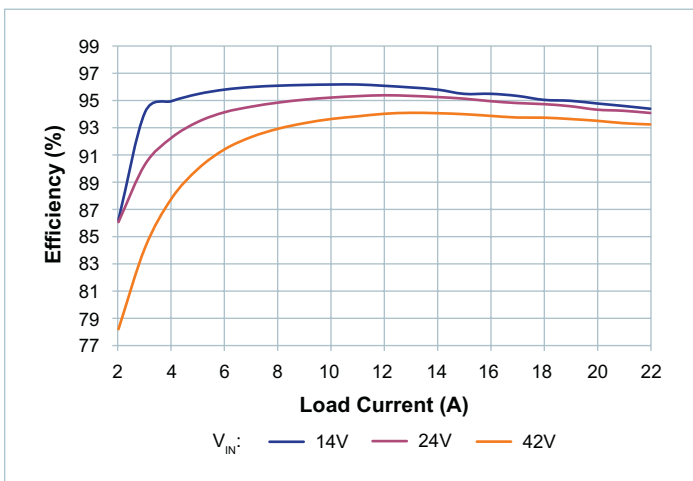


Figure 15 — System efficiency, high trim, board temperature = -40°C



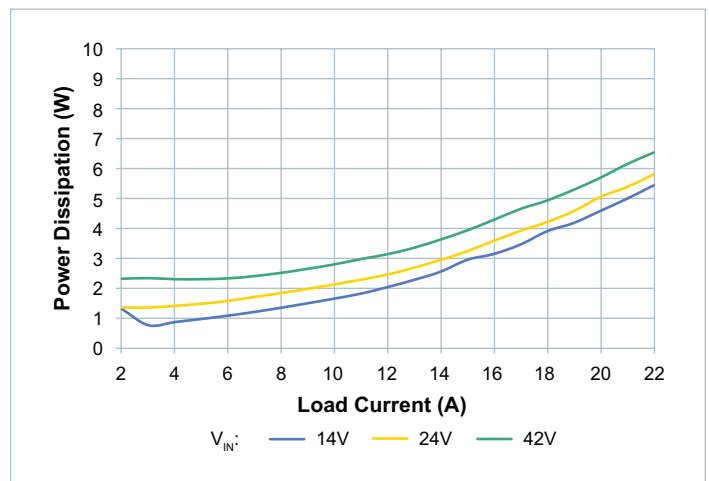


Figure 18 — System power dissipation, high trim, board temperature = -40°C


PI3323-00-LGMZ (3.3V<sub>OUT</sub>) Electrical Characteristics (Cont.)

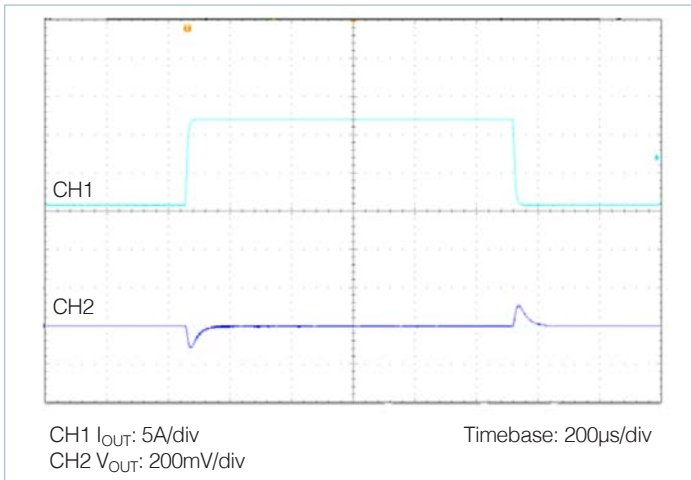


**Figure 19** — Transient response: 50 – 100% load, at 1A/µs. nominal line, nominal trim, C<sub>OUT</sub> = 8 x 100µF ceramic

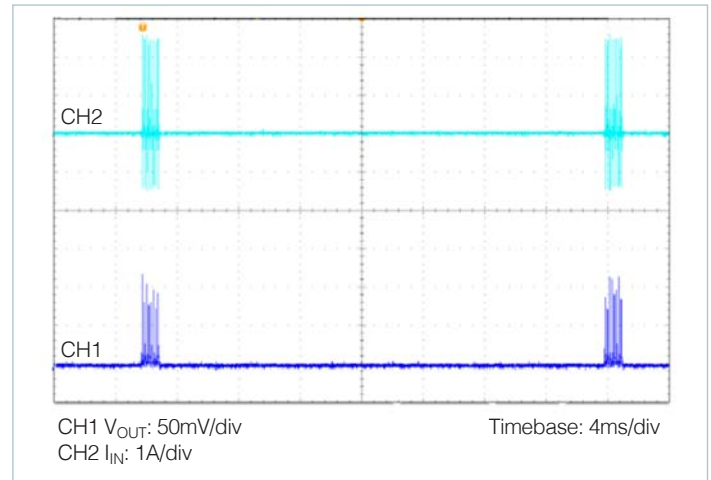


**Figure 22** — Output short circuit, nominal line

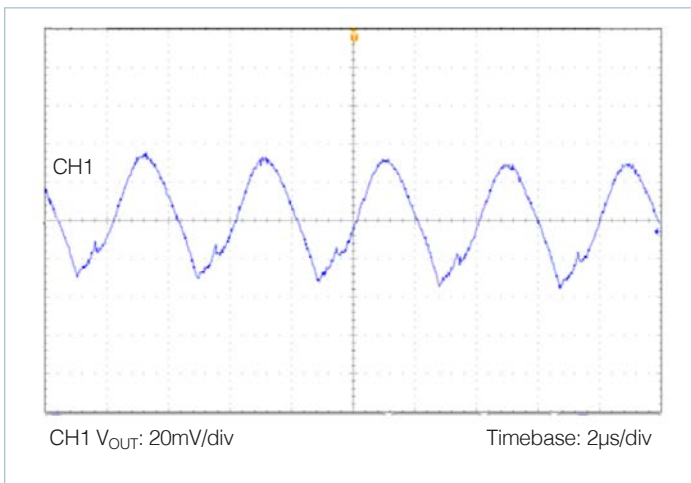


**Figure 20** — Output voltage ripple: nominal line, nominal trim, 100% load, C<sub>OUT</sub> = 8 x 100µF ceramic

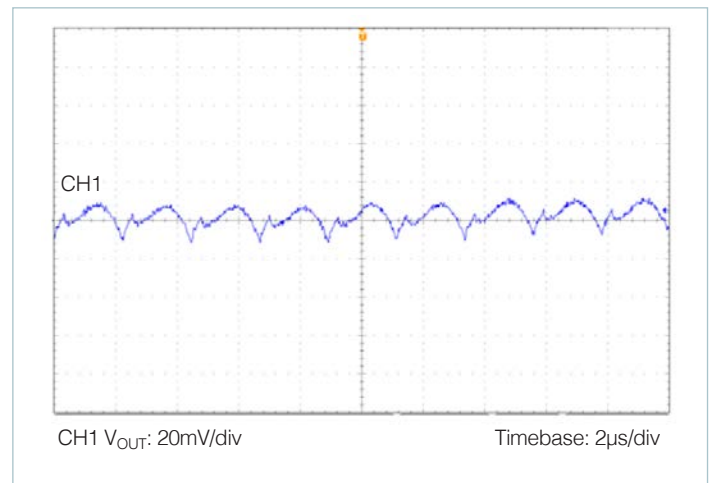

**Figure 23** — Output voltage ripple: nominal line, nominal trim, 50% load, C<sub>OUT</sub> = 8 x 100µF ceramic

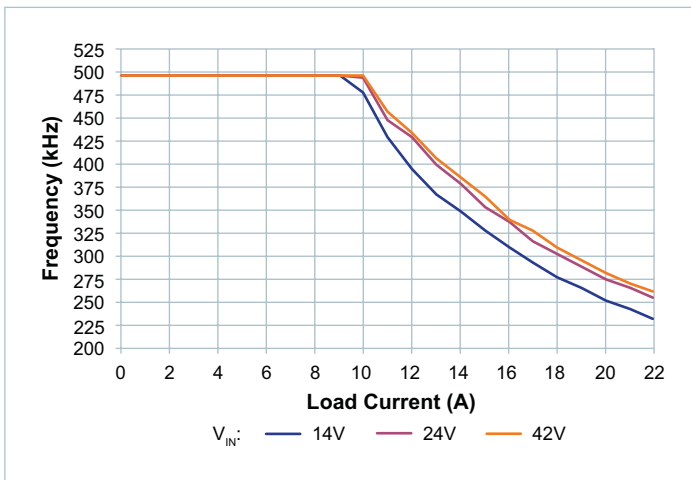

**Figure 21** — Switching frequency vs. load, nominal trim

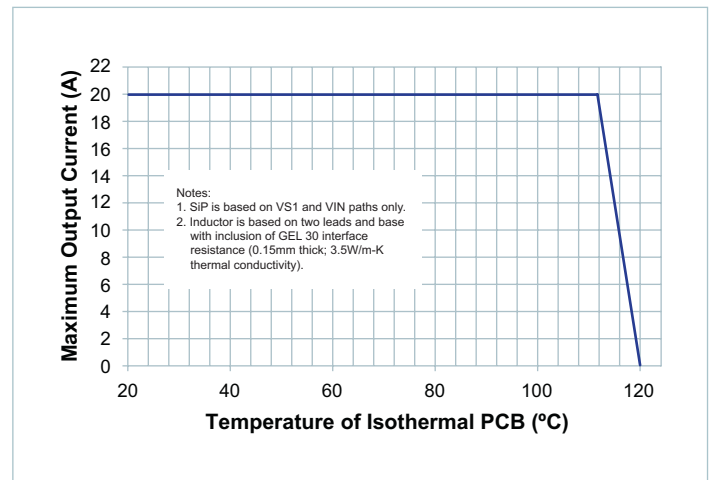

**Figure 24** — System thermal specified operating area: max I<sub>OUT</sub> at nominal trim vs. temperature at locations noted

PI3323-00-LGMZ (3.3V<sub>OUT</sub>) Electrical Characteristics (Cont.)

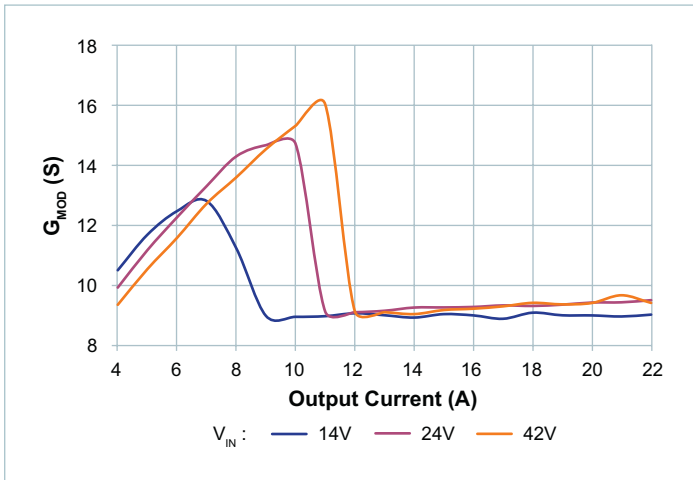


Figure 25 — Small-signal modulator gain vs.  $V_{EAO}$ , nominal trim

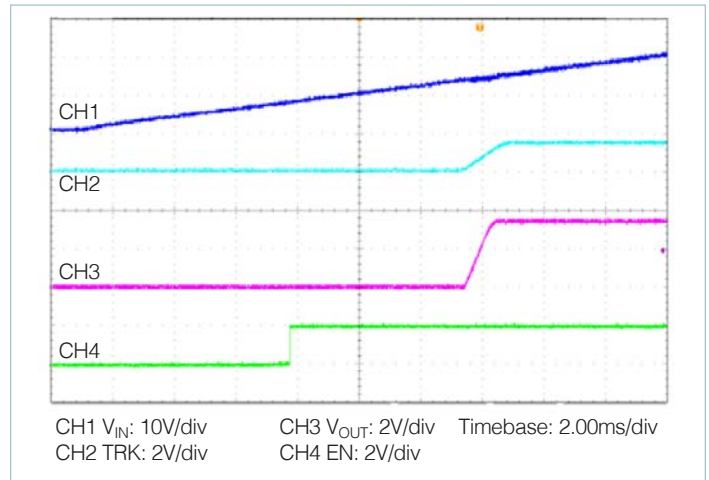


Figure 27 — Start up from  $V_{IN}$  applied, nominal line, nominal trim, typical timing, PI3323 shown

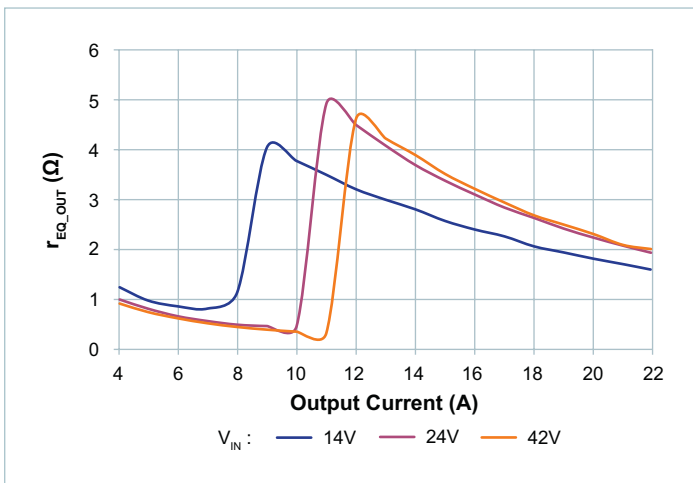


Figure 26 —  $r_{EQ\_OUT}$  vs  $V_{EAO}$ , nominal trim

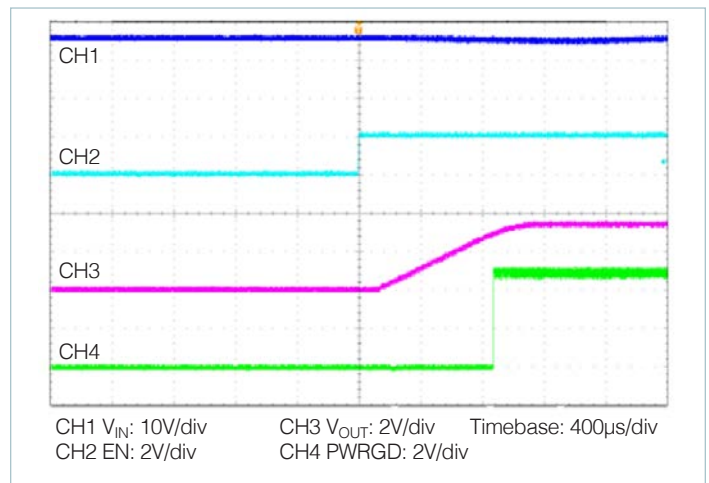


Figure 28 — Start up from EN,  $V_{IN}$  pre-applied, nominal line, nominal trim, typical timing, PI3323 shown

PI3325-00-LGIZ (5.0V<sub>OUT</sub>) Electrical Characteristics

Specifications apply for  $-40^{\circ}\text{C} < T_{\text{INT}} < 120^{\circ}\text{C}$ ,  $V_{\text{IN}} = 24\text{V}$ ,  $\text{EN} = \text{High}$ , unless otherwise noted.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
<b>Input Specifications</b>						
Input Voltage	$V_{\text{IN\_DC}}$		14	24	42	V
Input Current	$I_{\text{IN\_DC}}$	$V_{\text{IN}} = 24\text{V}$ , $T_{\text{CASE}} = 25^{\circ}\text{C}$ , $I_{\text{OUT}} = 20\text{A}$		4.41		A
Input Current At Output Short (Fault Condition Duty Cycle)	$I_{\text{IN\_Short}}$	Short at terminals		5		mA
Input Quiescent Current	$I_{\text{Q\_VIN}}$	Disabled		0.94	1.6	mA
Input Quiescent Current	$I_{\text{Q\_VIN}}$	Enabled, no load, $T_{\text{CASE}} = 25^{\circ}\text{C}$		4.2		mA
Input Voltage Slew Rate	$V_{\text{IN\_SR}}$	[b]			1	V/ $\mu\text{s}$
Input capacitance, Internal	$C_{\text{IN\_INT}}$	Effective value $V_{\text{IN}} = 24\text{V}$ , $25^{\circ}\text{C}$		0.7		$\mu\text{F}$
<b>Output Specifications</b>						
EAIN Voltage Total Regulation	$V_{\text{EAIN}}$	[b]	0.975	0.990	1.005	V
Output Voltage Trim Range	$V_{\text{OUT\_DC}}$	[b] [c]	4.0	5.0	6.5	V
Line Regulation	$\Delta V_{\text{OUT}} / \Delta V_{\text{IN}}$	At $25^{\circ}\text{C}$ , $14\text{V} < V_{\text{IN}} < 42\text{V}$		0.10		%
Load Regulation	$\Delta V_{\text{OUT}} / \Delta I_{\text{OUT}}$	At $25^{\circ}\text{C}$ , $2\text{A} < I_{\text{OUT}} < 20\text{A}$		0.10		%
Output Voltage Ripple	$V_{\text{OUT\_AC}}$	$I_{\text{OUT}} = 20\text{A}$ , $C_{\text{OUT}} = 12 \times 47\mu\text{F}$ , $20\text{MHz BW}$ [d]		55.7		mV <sub>P-P</sub>
Output Current	$I_{\text{OUT\_DC}}$	[e]	0		20	A
Current Limit	$I_{\text{OUT\_CL}}$	Typical current limit based on nominal 230nH inductor.		24		A
Maximum Array Size	$N_{\text{PARALLEL}}$	[b]			3	Modules
Output Current, Array of 2	$I_{\text{OUT\_DC\_ARRAY2}}$	Total array capability, [b] see applications section for details	0		[g]	A
Output Current, Array of 3	$I_{\text{OUT\_DC\_ARRAY3}}$	Total array capability, [b] see applications section for details	0		[g]	A
<b>Protection</b>						
Input UVLO Start Threshold	$V_{\text{UVLO\_START}}$			12.9	13.8	V
Input UVLO Stop Hysteresis	$V_{\text{UVLO\_HYS}}$		0.85	1.21	1.75	V
Input UVLO Response Time				1.25		$\mu\text{s}$
Input OVLO Stop Threshold	$V_{\text{OVLO}}$		44	47		V
Input OVLO Start Hysteresis	$V_{\text{OVLO\_HYS}}$	Hysteresis active when OVLO present for at least $t_{\text{FR\_DLY}}$	0.5	0.9	1.3	V
Input OVLO Response Time	$t_{\text{f}}$			1.25		$\mu\text{s}$
Output Overvoltage Protection, Relative	$V_{\text{OVP\_REL}}$	Above set $V_{\text{OUT}}$		20		%
Output Overvoltage Protection, Absolute	$V_{\text{OVP\_ABS}}$		6.7	7.37		V

[a] All parameters reflect regulator and inductor system performance. Measurements were made using a standard PI3325 evaluation board with  $3 \times 3''$  dimensions and four-layer, 2oz copper. Refer to inductor pairing table within Application Description section for specific inductor manufacturer and value.

[b] Regulator is assured to meet performance specifications by design, test correlation, characterization, and/or statistical process control.

Output voltage is determined by an external feedback divider ratio.

[c] Output current capability may be limited and other performance may vary from noted electrical characteristics when  $V_{\text{OUT}}$  is not set to nominal.

[d] Refer to Output Ripple plots.

[e] Refer to Load Current vs. Ambient Temperature curves.

[f] Refer to Switching Frequency vs. Load current curves.

[g] Contact factory applications for array derating and layout best practices to minimize sharing errors.

PI3325-00-LGIZ (5.0V<sub>OUT</sub>) Electrical Characteristics (Cont.)

Specifications apply for  $-40^{\circ}\text{C} < T_{\text{INT}} < 120^{\circ}\text{C}$ ,  $V_{\text{IN}} = 24\text{V}$ , EN = High, unless otherwise noted.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
<b>Timing</b>						
Switching Frequency	$f_s$	<sup>[f]</sup> While in Discontinuous Conduction Mode (DCM) only, SYNCI grounded	564	600	636	kHz
Fault Restart Delay	$t_{\text{FR\_DLY}}$			30		ms
<b>Synchronization Input (SYNCI)</b>						
Synchronization Frequency Range	$f_{\text{SYNCI}}$	-50% and +10% relative to set switching frequency ( $f_s$ ), while in DCM operating mode only. <sup>[c]</sup> and <sup>[f]</sup>	300		660	kHz
SYNCI Threshold	$V_{\text{SYNCI}}$			2.5		V
<b>Synchronization Output (SYNCO)</b>						
SYNCO High	$V_{\text{SYNCO\_HI}}$	Source 1mA	4.5			V
SYNCO Low	$V_{\text{SYNCO\_LO}}$	Sink 1mA			0.5	V
SYNCO Rise Time	$t_{\text{SYNCO\_RT}}$	20pF load		10		ns
SYNCO Fall Time	$t_{\text{SYNCO\_FT}}$	20pF load		10		ns
<b>Soft Start, Tracking and Error Amplifier</b>						
TRK Active Range (Nominal)	$V_{\text{TRK}}$		0		1.4	V
TRK Enable Threshold	$V_{\text{TRK\_OV}}$		20	40	60	mV
TRK to EAIN Offset	$V_{\text{EAIN\_OV}}$		40	80	120	mV
Charge Current (Soft Start)	$I_{\text{TRK}}$		30	50	70	$\mu\text{A}$
Discharge Current (Fault)	$I_{\text{TRK\_DIS}}$	$V_{\text{TRK}} = 0.5\text{V}$		8.7		mA
TRK Capacitance, Internal	$C_{\text{TRK\_INT}}$			47		nF
Soft-Start Time	$t_{\text{SS}}$	$C_{\text{TRK\_EXT}} = 0\mu\text{F}$	0.6	0.94	1.6	ms
Error Amplifier Transconductance	$G_{\text{MEAO}}$			7.6		mS
PSM Skip Threshold	$\text{PSM}_{\text{SKIP}}$			0.8		V
EAIN Capacitance, Internal	$C_{\text{EAIN\_INT}}$			56		pF
Error Amplifier Output Impedance	$R_{\text{OUT}}$	<sup>[b]</sup>	1			M $\Omega$
Internal Compensation Capacitor	$C_{\text{HF}}$			56		pf
Internal Compensation Resistor	$R_{\text{ZI}}$			5		k $\Omega$

<sup>[a]</sup> All parameters reflect regulator and inductor system performance. Measurements were made using a standard PI3325 evaluation board with 3 x 3" dimensions and four-layer, 2oz copper. Refer to inductor pairing table within Application Description section for specific inductor manufacturer and value.

<sup>[b]</sup> Regulator is assured to meet performance specifications by design, test correlation, characterization, and/or statistical process control.

Output voltage is determined by an external feedback divider ratio.

<sup>[c]</sup> Output current capability may be limited and other performance may vary from noted electrical characteristics when  $V_{\text{OUT}}$  is not set to nominal.

<sup>[d]</sup> Refer to Output Ripple plots.

<sup>[e]</sup> Refer to Load Current vs. Ambient Temperature curves.

<sup>[f]</sup> Refer to Switching Frequency vs. Load current curves.

PI3325-00-LGIZ (5.0V<sub>OUT</sub>) Electrical Characteristics (Cont.)

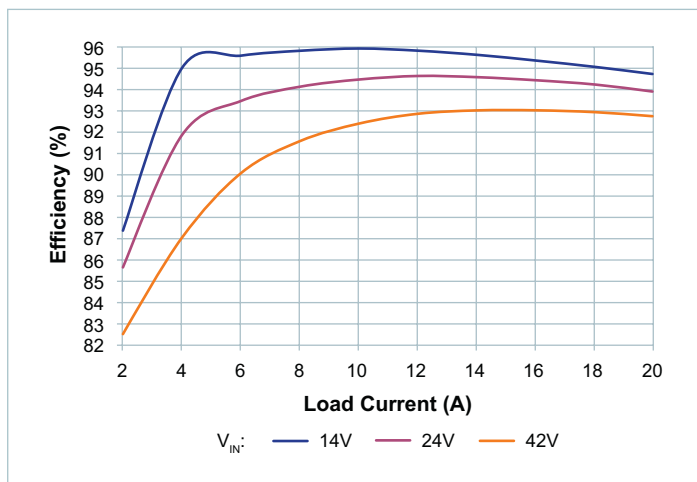


Figure 29 — System efficiency, nominal trim, board temperature = 25°C

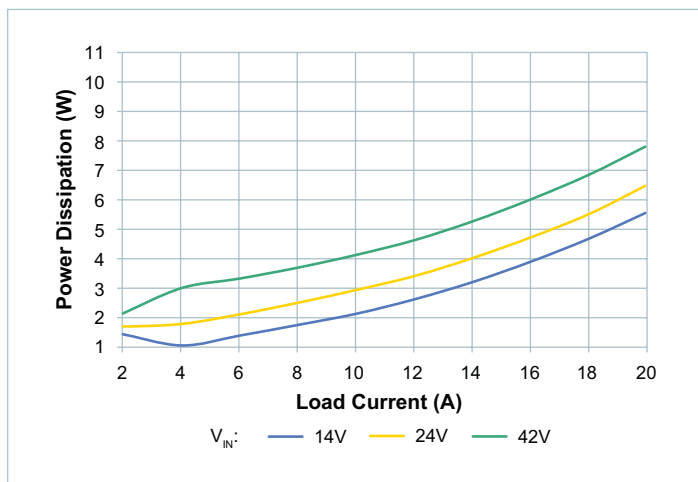


Figure 32 — System power dissipation, nominal trim, board temperature = 25°C

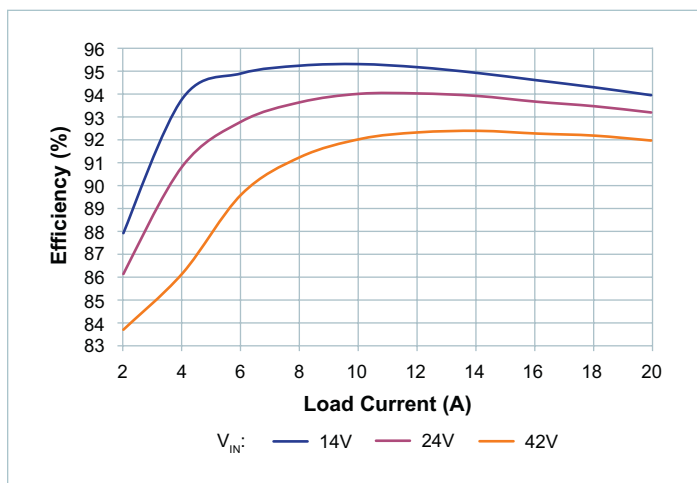


Figure 30 — System efficiency, low trim, board temperature = 25°C

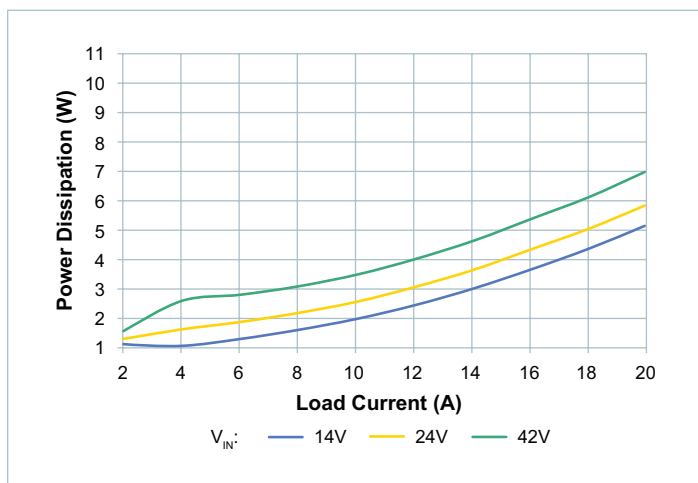


Figure 33 — System power dissipation, low trim, board temperature = 25°C

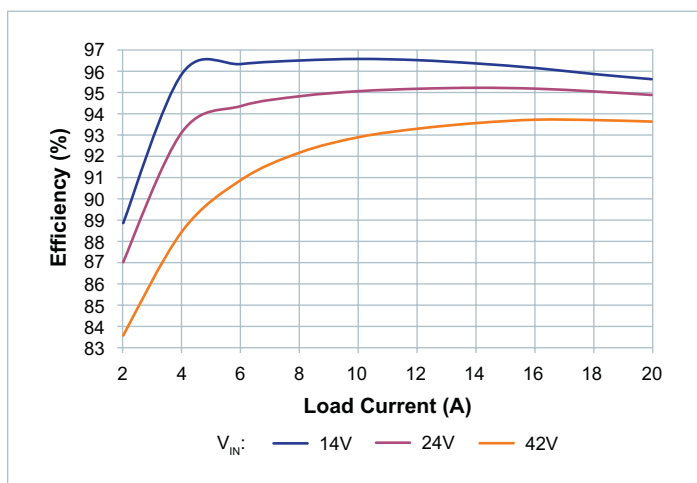


Figure 31 — System efficiency, high trim, board temperature = 25°C

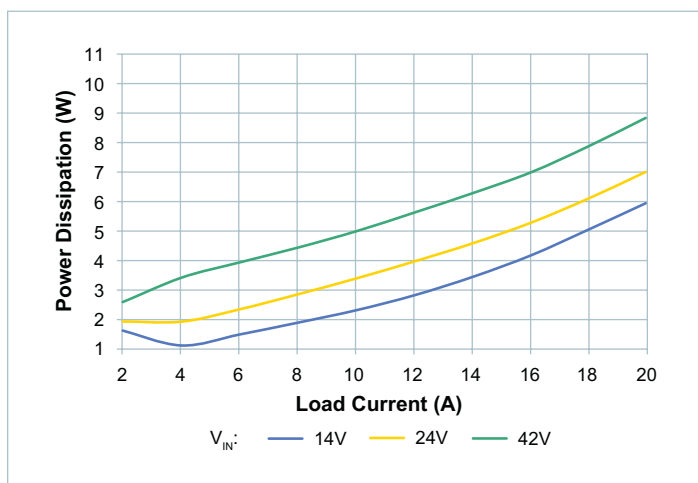


Figure 34 — System power dissipation, high trim, board temperature = 25°C

PI3325-00-LGIZ (5.0V<sub>OUT</sub>) Electrical Characteristics (Cont.)

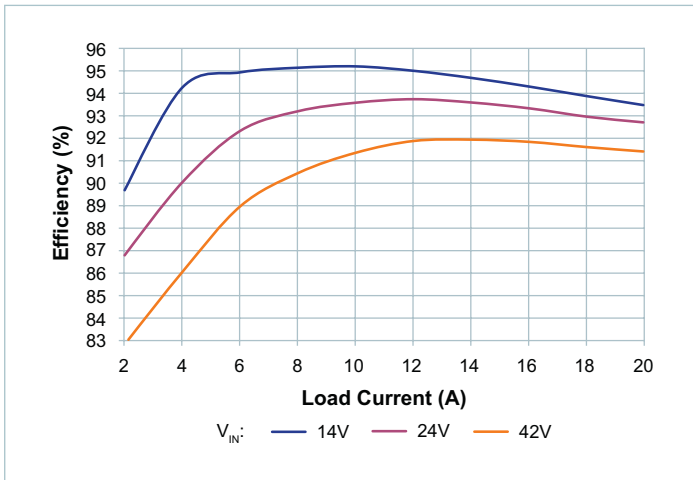


Figure 35 — System efficiency, nominal trim, board temperature = 90°C

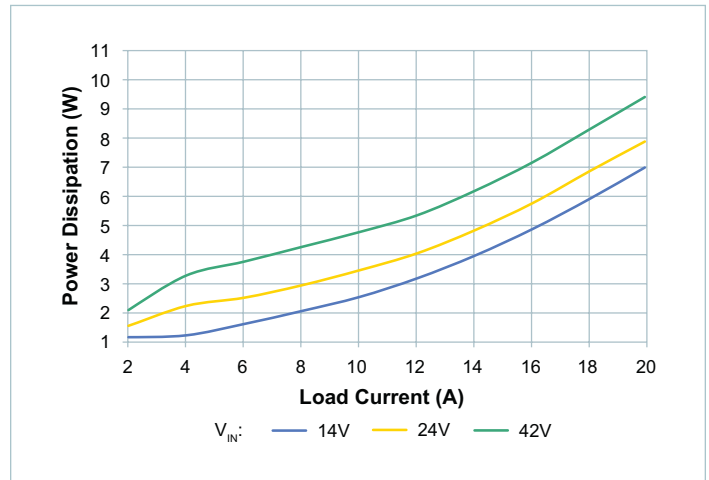


Figure 38 — System power dissipation, nominal trim, board temperature = 90°C

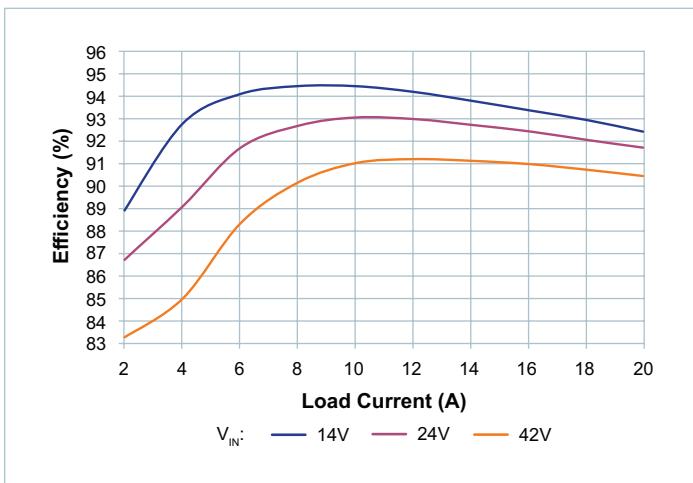


Figure 36 — System efficiency, low trim, board temperature = 90°C

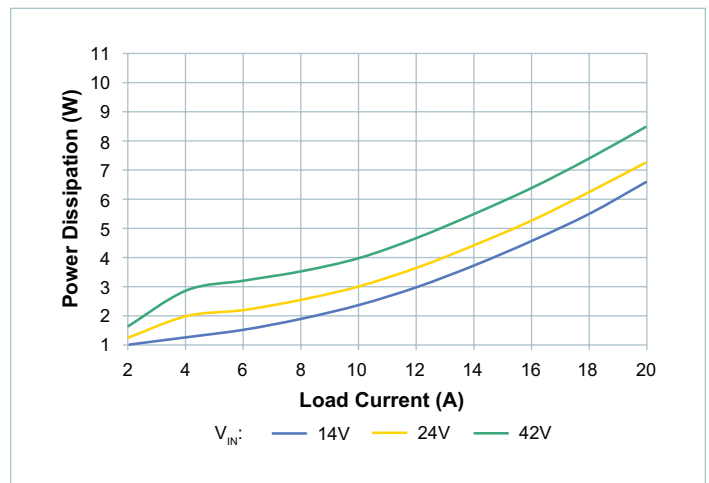


Figure 39 — System power dissipation, low trim, board temperature = 90°C

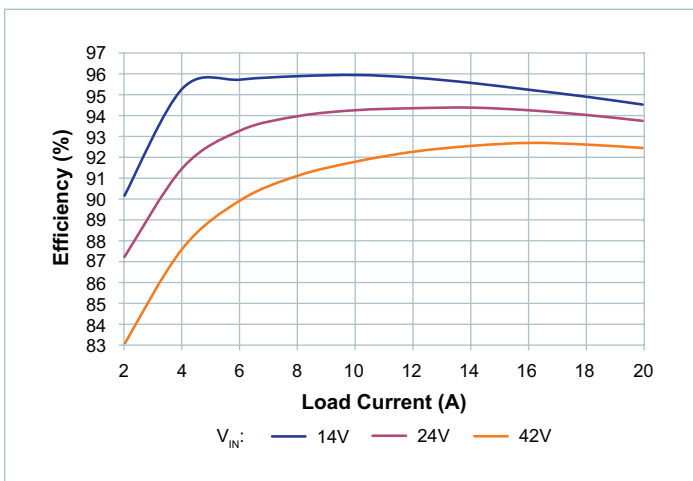


Figure 37 — System efficiency, high trim, board temperature = 90°C

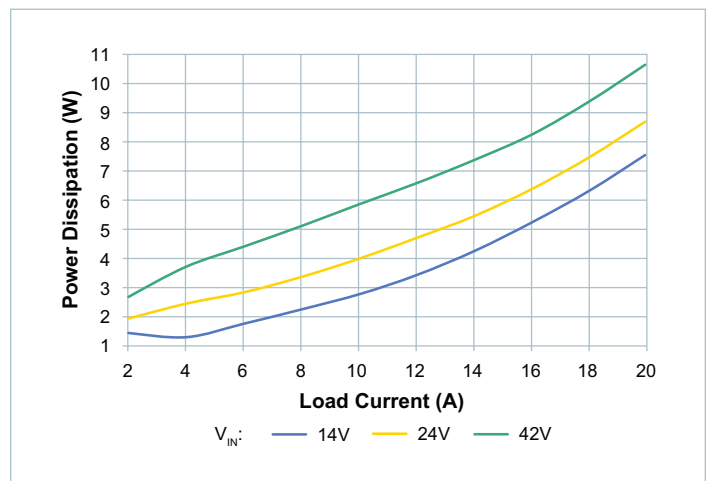


Figure 40 — System power dissipation, high trim, board temperature = 90°C

PI3325-00-LGIZ (5.0V<sub>OUT</sub>) Electrical Characteristics (Cont.)

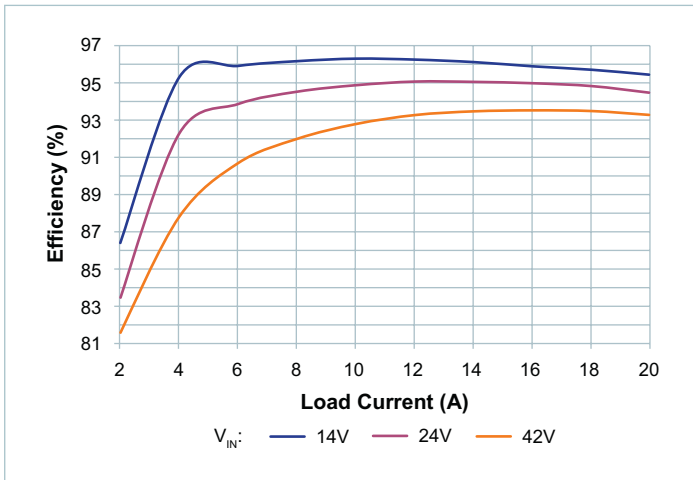


Figure 41 — System efficiency, nominal trim, board temperature = -40°C

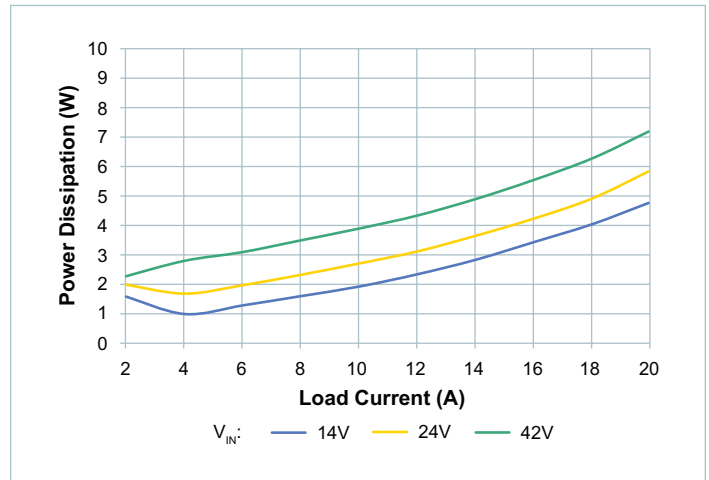


Figure 44 — System power dissipation, nominal trim, board temperature = -40°C

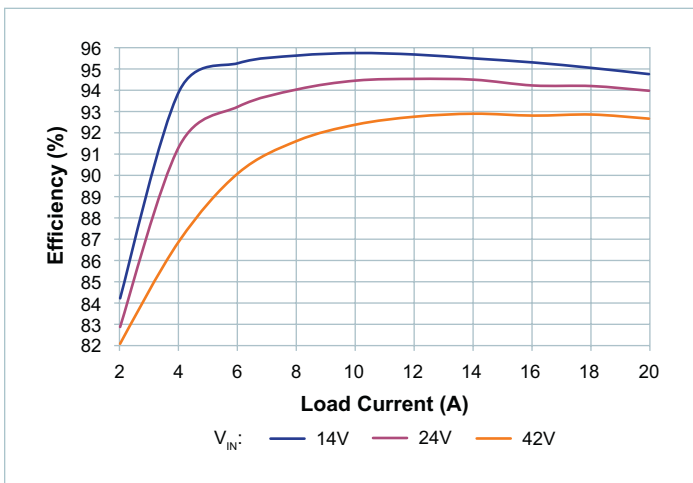


Figure 42 — System efficiency, low trim, board temperature = -40°C

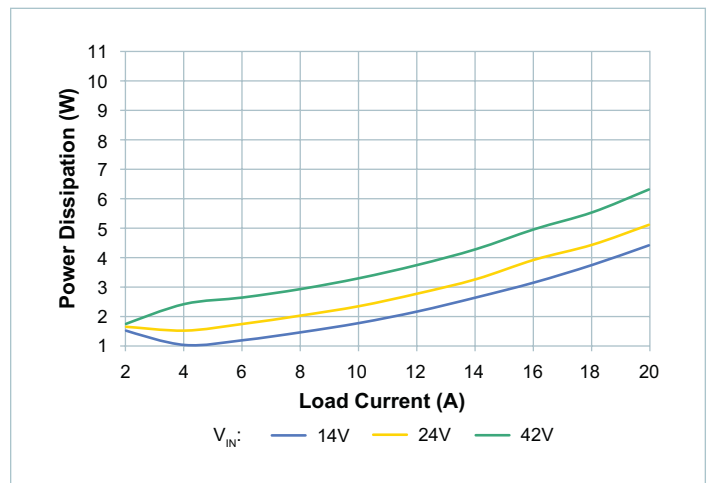


Figure 45 — System power dissipation, low trim, board temperature = -40°C

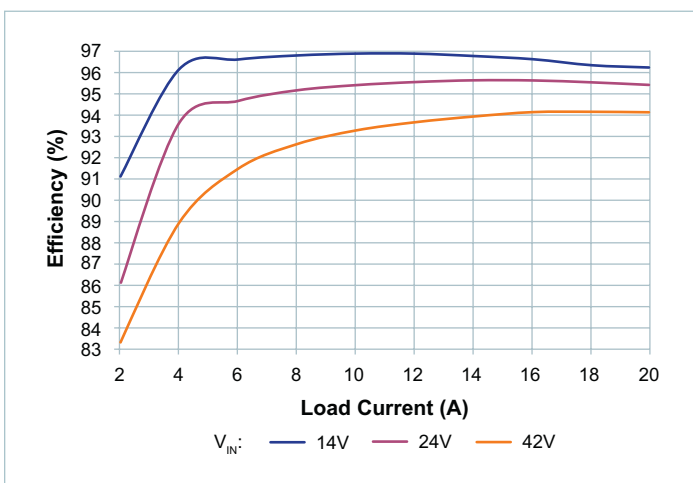


Figure 43 — System efficiency, high trim, board temperature = -40°C



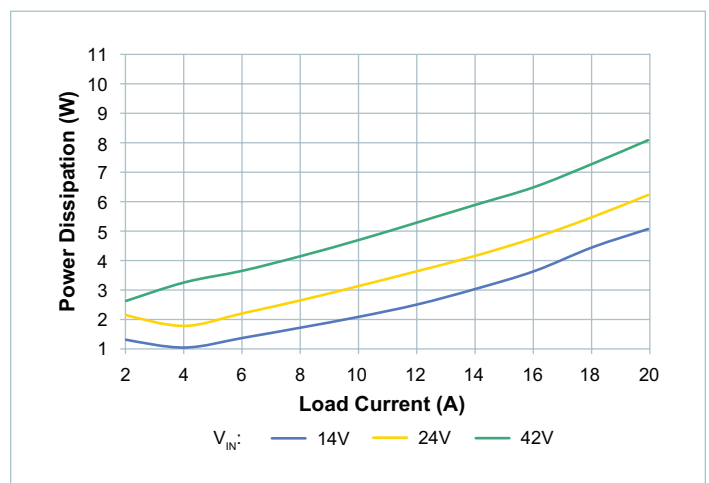


Figure 46 — System power dissipation, high trim, board temperature = -40°C


PI3325-00-LGIZ (5.0V<sub>OUT</sub>) Electrical Characteristics (Cont.)

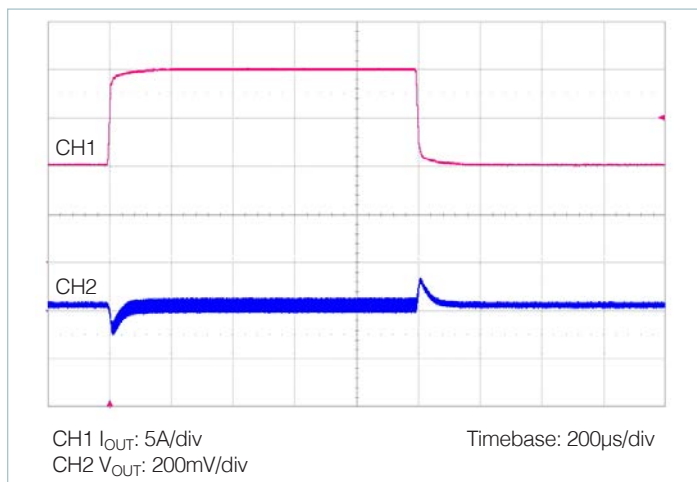


**Figure 47** — Transient response: 50 – 100% load, at 1A/µs. nominal line, nominal trim, C<sub>OUT</sub> = 12 x 47µF ceramic

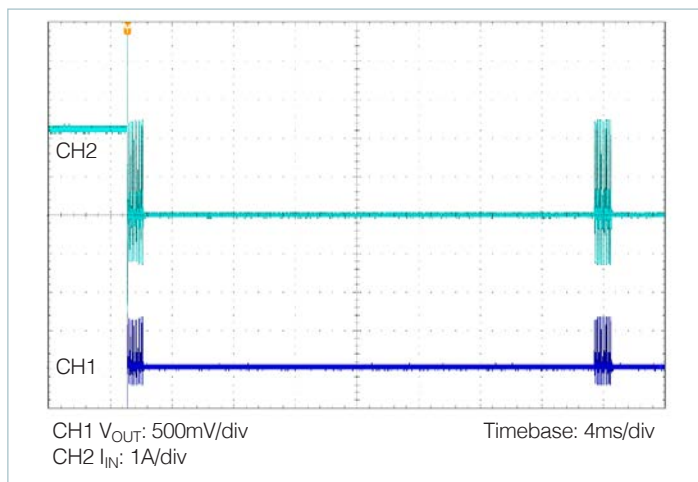


**Figure 50** — Output short circuit, nominal line

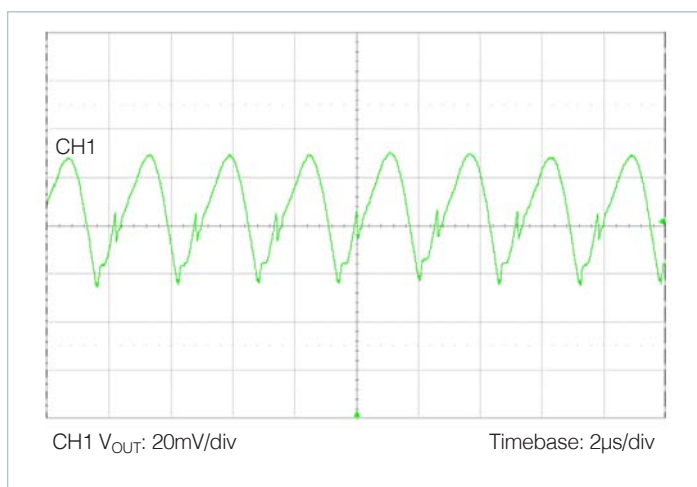


**Figure 48** — Output voltage ripple: nominal line, nominal trim, 100% load, C<sub>OUT</sub> = 12 x 47µF ceramic

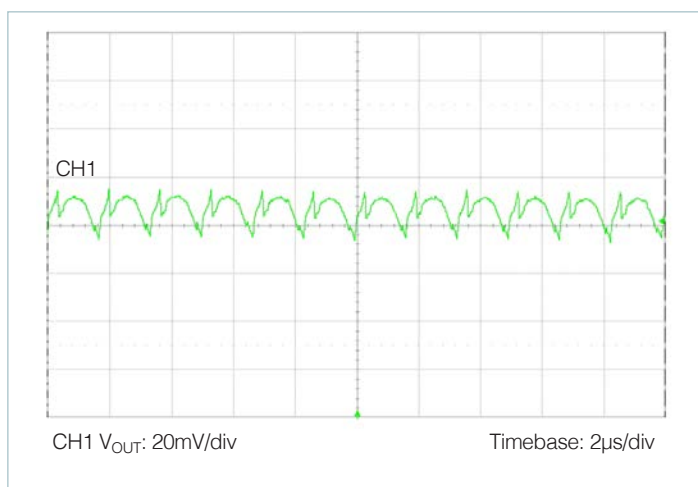

**Figure 51** — Output voltage ripple: nominal line, nominal trim, 50% load, C<sub>OUT</sub> = 12 x 47µF ceramic

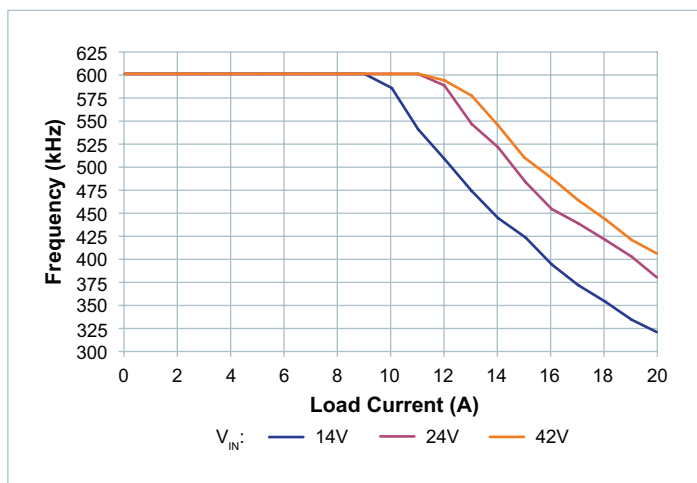

**Figure 49** — Switching frequency vs. load, nominal trim

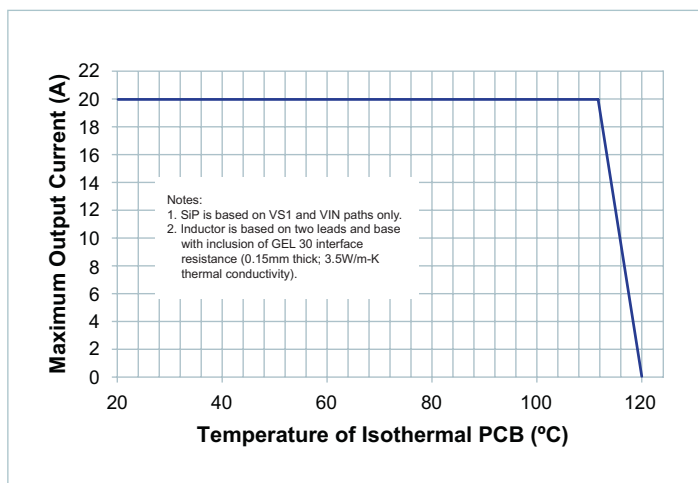

**Figure 52** — System thermal specified operating area: max I<sub>OUT</sub> at nominal trim vs. temperature at locations noted

PI3325-00-LGIZ (5.0V<sub>OUT</sub>) Electrical Characteristics (Cont.)

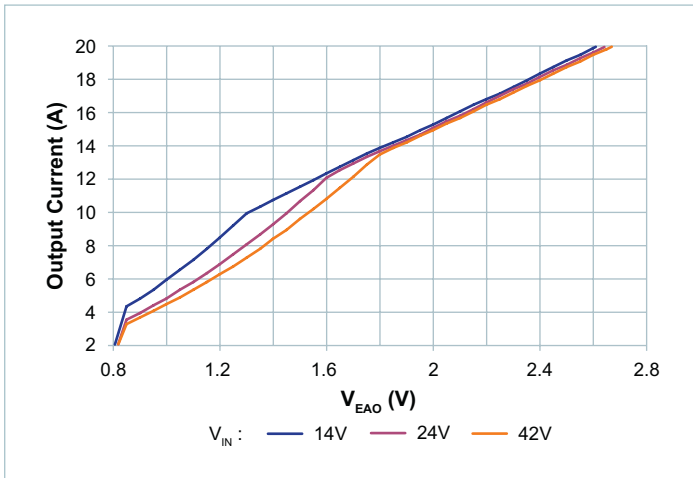


Figure 53 — Output current vs.  $V_{EAO}$ , nominal trim

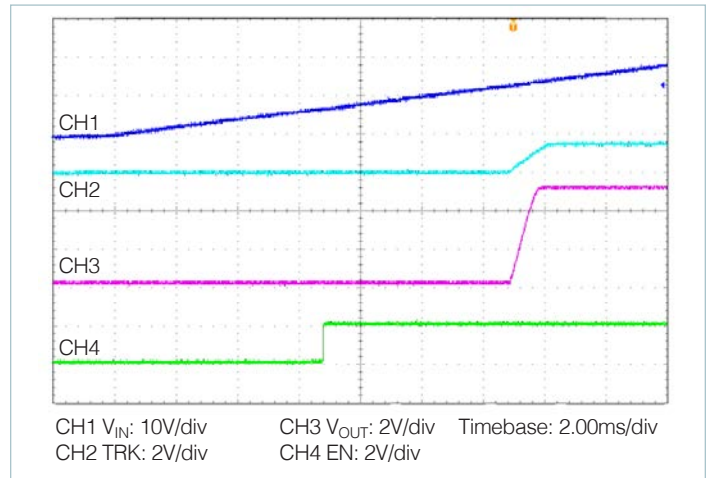


Figure 56 — Start up from  $V_{IN}$  applied, nominal line, nominal trim, typical timing, PI3325 shown

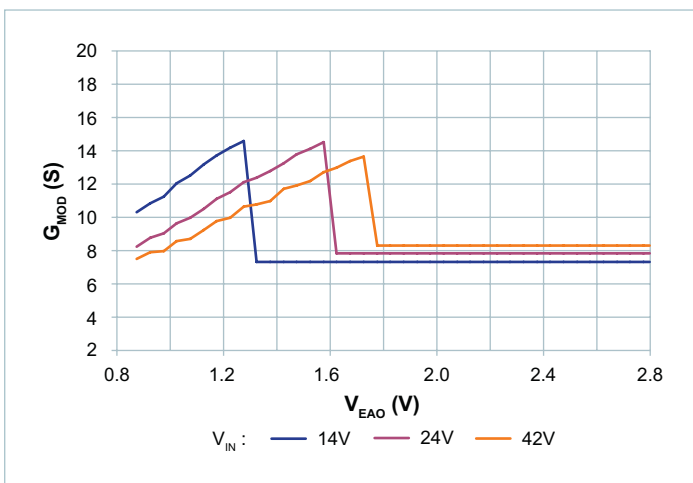


Figure 54 — Small signal modulator gain vs.  $V_{EAO}$ , nominal trim

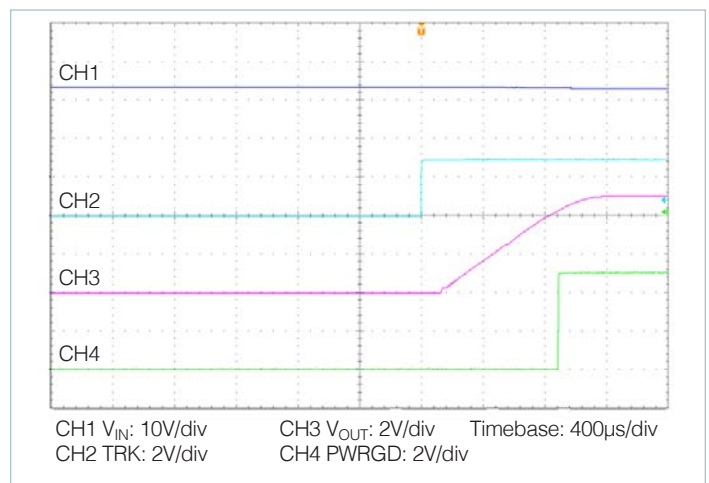


Figure 57 — Start up from EN,  $V_{IN}$  pre-applied, nominal line, nominal trim, typical timing, PI3325 shown


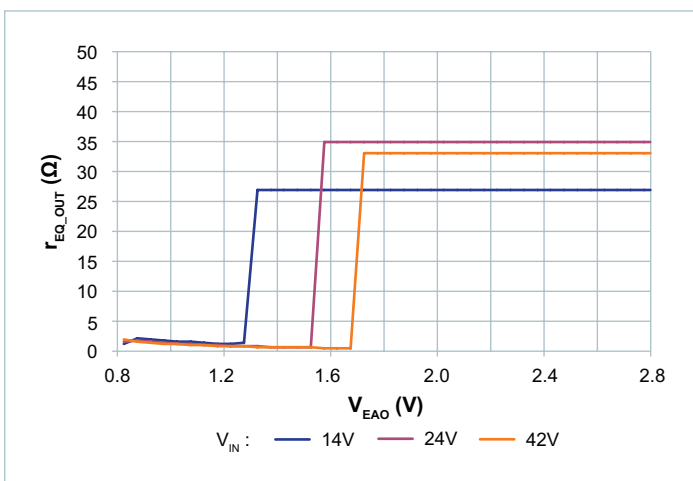


Figure 55 —  $r_{EQ\_OUT}$  vs  $V_{EAO}$ , nominal trim

## Functional Description

The PI332x-00 is a family of highly integrated ZVS Buck regulators. The PI332x-00 has an output voltage that can be set within a prescribed range shown in Table 1. Performance and maximum output current are characterized with a specific external power inductor (see Table 3).

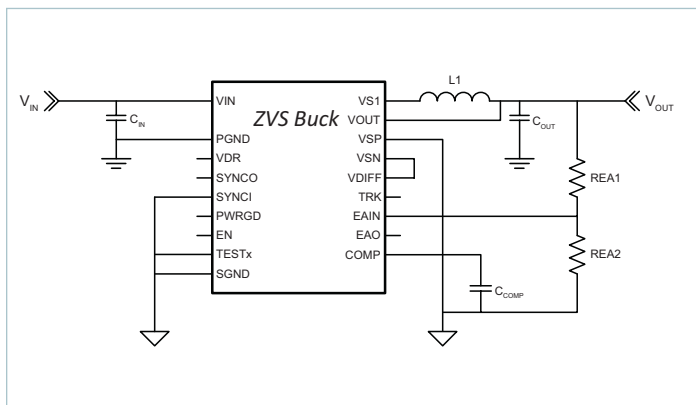

**Figure 58** — ZVS Buck with required components

For basic operation, Figure 58 shows the connections and components required. No additional design or settings are required.

### ENABLE (EN)

EN is the enable pin of the converter. The EN Pin is referenced to SGND and permits the user to turn the regulator on or off. The EN default polarity is a positive logic assertion. If the EN pin is left floating or asserted high, the converter output is enabled. Pulling EN pin below  $V_{EN\_LO}$  with respect to SGND will disable the regulator output.

### Remote Sensing

If remote sensing is required, the PI332x-00 product family is equipped with a general purpose op-amp. This amplifier can allow full differential remote sense by configuring it as a differential follower and connecting the  $V_{DIFF}$  pin to the EAIN pin.

### Soft Start

The PI332x-00 includes an internal soft-start capacitor to control the rate of rise of the output voltage. See the Electrical Characteristics Section for the default value. Connecting an external capacitor from the TRK pin to SGND will increase the start-up ramp period. See, "Soft Start Adjustment and Track," in the Applications Description section for more details.

### Output Voltage Selection

The PI332x-00 output voltage is set with REA1 and REA2 as shown in Figure 58. Table 1 defines the allowable operational voltage ranges for the PI332x-00 family. Refer to the Output Voltage Set Point Application Description for details.

Device	Output Voltage	
	Nominal	Range
PI3323-00-LGMZ	3.3V	2.2 – 4.0V
PI3325-00-LGIZ	5.0V	4.0 – 6.5V

**Table 1** — PI332x-00 family output voltage ranges

### Output Current Limit Protection

The PI332x-00 has a current limit protection, which prevents the output from sourcing current higher than the regulator's maximum rated current. If the output current exceeds the Current Limit ( $I_{OUT\_CL}$ ) for 1024 $\mu$ s, a slow current limit fault is initiated and the regulator is shutdown which eliminates output current flow. After Fault Restart Delay ( $t_{FR\_DLY}$ ), a soft-start cycle is initiated. This restart cycle will be repeated indefinitely until the excessive load is removed.

The PI332x-00 also has short circuit protection which can rapidly stop switching to protect against catastrophic failure of an external component such as a saturated inductor. If short-circuit protection is triggered the PI332x-00 will complete the current cycle and stop switching. The module will attempt to soft start after Fault Restart Delay ( $t_{FR\_DLY}$ ).

### Input Undervoltage Lockout

If  $V_{IN}$  falls below the input Undervoltage Lockout (UVLO) threshold, but remains high enough to power the internal bias supply, the PI332x-00 will complete the current cycle and stop switching. The system will soft start once the input voltage is reestablished and after the Fault Restart Delay.

### Input Overvoltage Lockout

If  $V_{IN}$  exceeds the input Overvoltage Lockout (OVLO) threshold ( $V_{OVLO}$ ), while the controller is running, the PI332x-00 will complete the current cycle and stop switching. If  $V_{IN}$  remains above OVLO for at least  $t_{FR\_DLY}$ , then the input voltage is considered reestablished once  $V_{IN}$  goes below  $V_{OVLO} - V_{OVLO\_HYS}$ . If  $V_{IN}$  goes below OVLO before  $t_{FR\_DLY}$  elapses, then the input voltage is considered reestablished once  $V_{IN}$  goes below  $V_{OVLO}$ . The system will soft start once the input voltage is reestablished and after the Fault Restart Delay.

### Output Overvoltage Protection

The PI332x-00 family is equipped with output Overvoltage Protection (OVP) to prevent damage to input voltage sensitive devices. If the output voltage exceeds  $V_{OVP\_REL}$  or  $V_{OVP\_ABS}$ , the regulator will complete the current cycle and stop switching. The system will resume operation once the output voltage falls below the OVP threshold and after Fault Restart Delay.

### Overtemperature Protection

The PI332x-00 features an overtemperature protection (OTP), which will not engage until after the product is operated above the maximum rated temperature. The OTP circuit is only designed to protect against catastrophic failure due to excessive temperatures and should not be relied upon to ensure the device stays within the recommended operating temperature range. Thermal shut down terminates switching and discharges the soft-start capacitor. The PI332x-00 will restart after the excessive temperature has decreased by 30°C.

### Pulse Skip Mode (PSM)

PI332x-00 features a Pulse Skip Mode (PSM) to achieve high efficiency at light loads. The regulators are set up to skip pulses if EAO falls below a PSM threshold ( $PSM_{SKIP}$ ). Depending on conditions and component values, this may result in single pulses or several consecutive pulses followed by skipped pulses. Skipping cycles significantly reduces gate drive power and improves light load efficiency. The regulator will leave PSM once the EAO rises above the Pulse Skip Mode threshold.

### Variable Frequency Operation

Each PI332x-00 is preprogrammed to a base operating frequency, with respect to the power stage inductor (see Table 2), to operate at peak efficiency across line and load variations. At low-line and high-load applications, the base frequency will decrease to accommodate these extreme operating ranges. By stretching the frequency, the ZVS operation is preserved throughout the total input line voltage range therefore maintaining optimum efficiency.

### Thermal Characteristics

Figure 31(a) and 31(c) thermal impedance models that can predict the maximum temperature of the hottest component for a given operating condition. This model assumes that all customer PCB connections are at one temperature, which is PCB equivalent Temperature  $T_{PCB}$  °C.

The SiP model can be simplified as shown in Figure 31(b), which assumes all PCB nodes are at the same temperature.

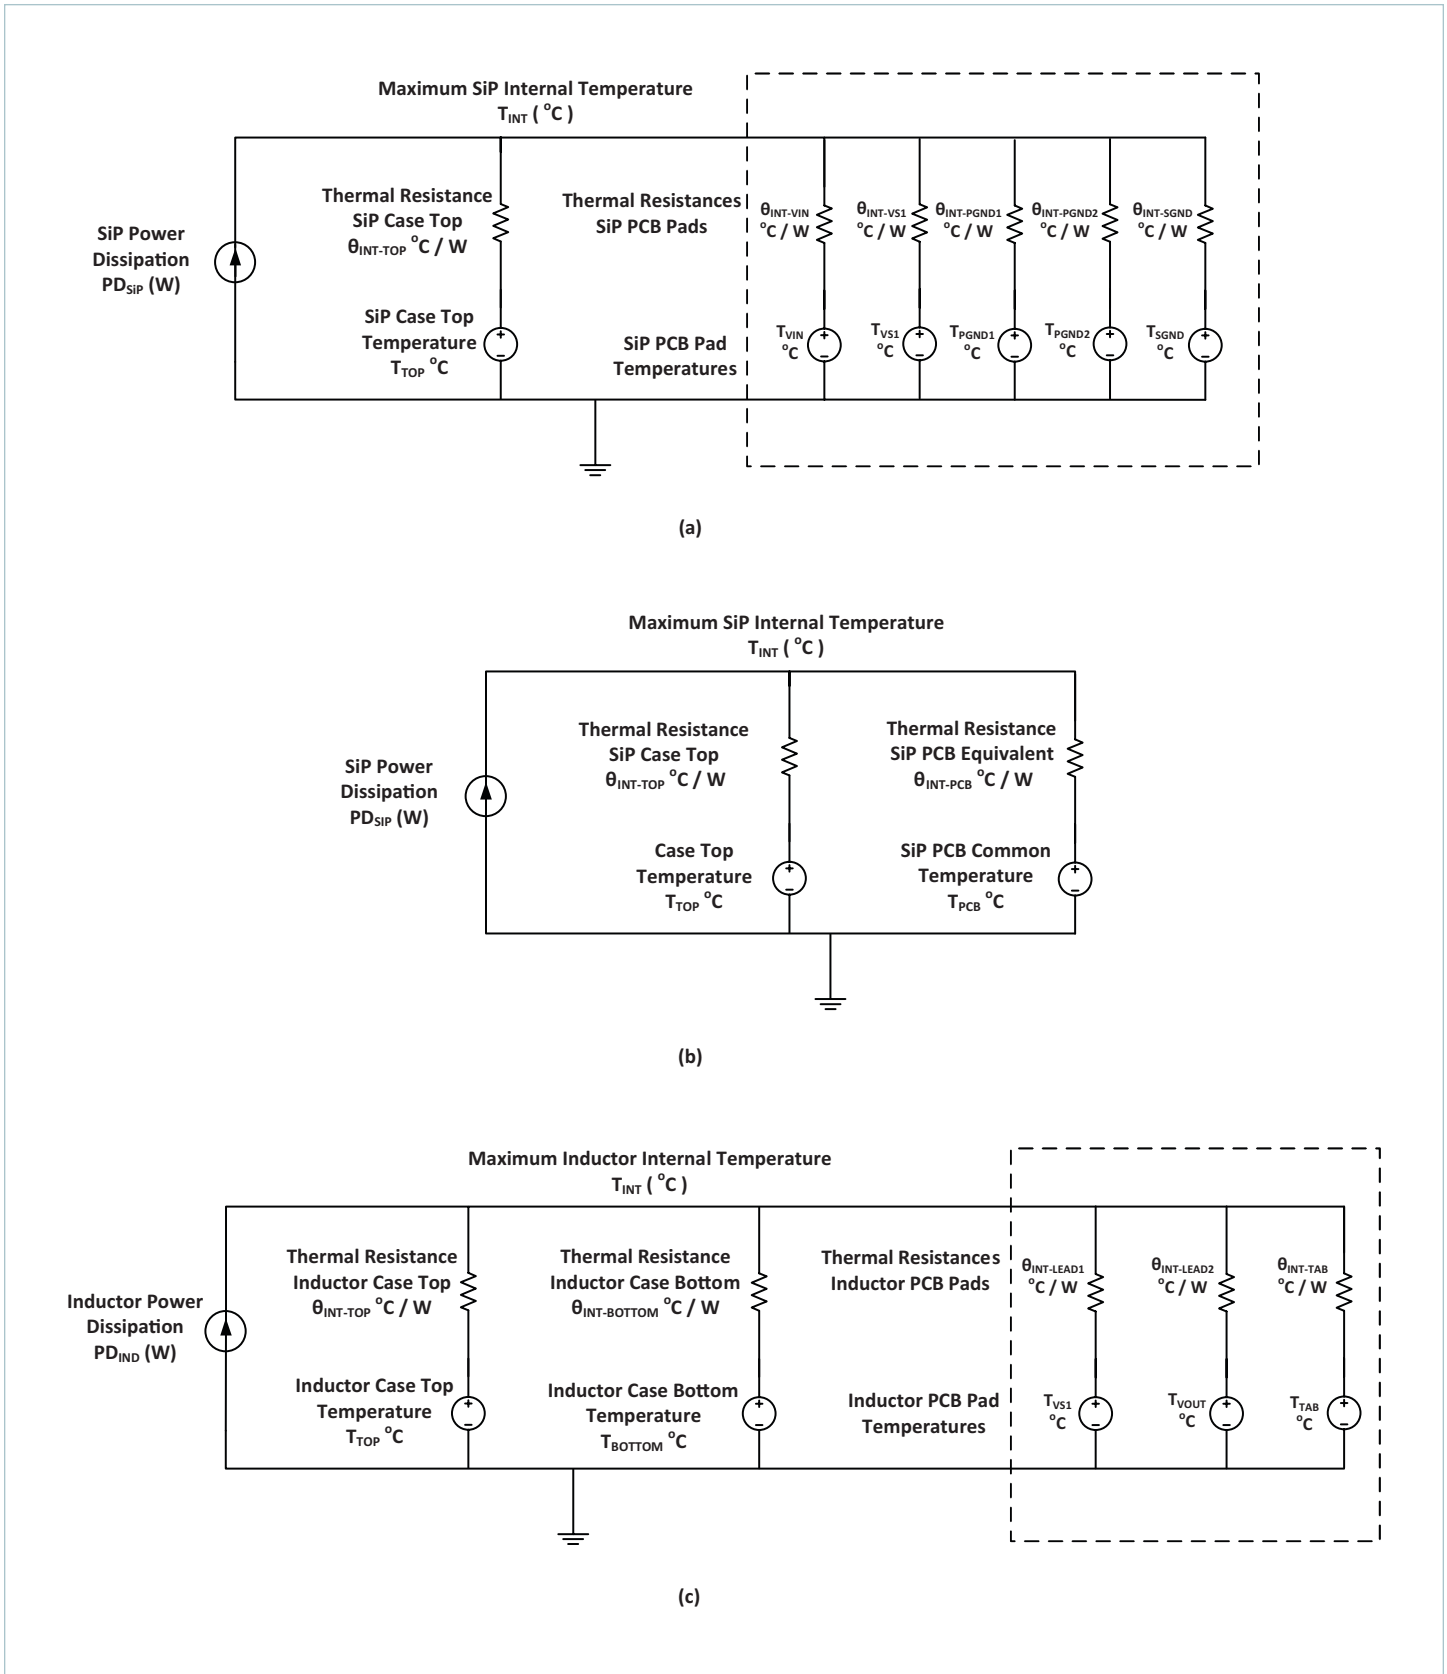


Figure 59 — PI3325-00 thermal model (a), SiP simplified version (b) and inductor thermal model (c)

Where the symbol in Figure 59(a) and (b) is defined as the following:

$\theta_{INT-TOP}$	the thermal impedance from the hottest component inside the SiP to the top side
$\theta_{INT-PCB}$	the thermal impedance from the hottest component inside the SiP to the customer PCB, assuming all pins are at one temperature.
$\theta_{INT-VIN}$	the thermal impedance from the hottest component inside the SiP to the circuit board VIN pads.
$\theta_{INT-VS1}$	the thermal impedance from the hottest component inside the SiP to the circuit board VS1 pads.
$\theta_{INT-PGND1}$	the thermal impedance from the hottest component inside the SiP to the circuit board at the PGND1 pads. PGND1 is pins 12A-K.
$\theta_{INT-PGND2}$	the thermal impedance from the hottest component inside the SiP to the circuit board at the PGND2 pads. PGND2 is pins 2F-J, 3F-J, 4C-J, 5B-J and 6C-K.
$\theta_{INT-SGND}$	the thermal impedance from the hottest component inside the SiP to the circuit board at the SGND pads.

Where the symbol in Figure 59(c) is defined as the following:

$\theta_{INT-TOP}$	the thermal impedance from the hot spot to the top surface of the core.
$\theta_{INT-BOT}$	the thermal impedance from the hot spot to the bottom surface of the core.
$\theta_{INT-TAB}$	the thermal impedance from the hot spot to the metal mounting tab on the core body, if applicable.
$\theta_{INT-LEAD1}$	the thermal impedance from the hot spot to one of the mounting leads. Since the leads are the same thermal impedance, there is no need to specify by explicit pin number.
$\theta_{INT-LEAD2}$	the thermal impedance from the hot spot to the other mounting lead.

The following equation can predict the junction temperature based on the heat load applied to the SiP and the known ambient conditions with the simplified thermal circuit model:

$$T_{INT} = \frac{PD + \frac{T_{TOP}}{\theta_{INT-TOP}} + \frac{T_{PCB}}{\theta_{INT-PCB}}}{\frac{1}{\theta_{INT-TOP}} + \frac{1}{\theta_{INT-PCB}}} \quad (1)$$

Product System	Simplified SiP Thermal Impedances		Detailed SiP Thermal Impedances					
	$\theta_{INT-TOP}$ (°C / W)	$\theta_{INT-PCB}$ (°C / W)	$\theta_{INT-TOP}$ (°C / W)	$\theta_{INT-VIN}$ (°C / W)	$\theta_{INT-VS1}$ (°C / W)	$\theta_{INT-PGND1}$ (°C / W)	$\theta_{INT-PGND2}$ (°C / W)	$\theta_{INT-SGND}$ (°C / W)
PI332x-00	110	1.7	110	3.4	4.8	33	33	91

Table 2 — PI332x-00 SiP thermal impedance

Product System	Inductor Part Number	Effective Thermal Impedances			
		$\theta_{INT-TOP}$ (°C / W)	$\theta_{INT-LEAD1}, \theta_{INT-LEAD2}$ (°C / W)	$\theta_{INT-BOTTOM}$ (°C / W)	$\theta_{INT-TAB}$ (°C / W)
PI332x-00	FP2207R1-R230-R	11	9.4	6.8	N/A

Table 3 — Inductor effective thermal model parameters

SiP Power Dissipation as Percentage of Total System Losses

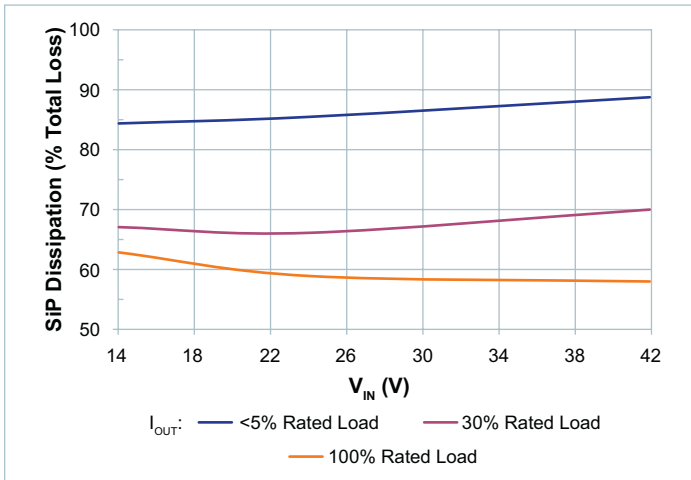


Figure 60 — PI3323-00-LGMZ


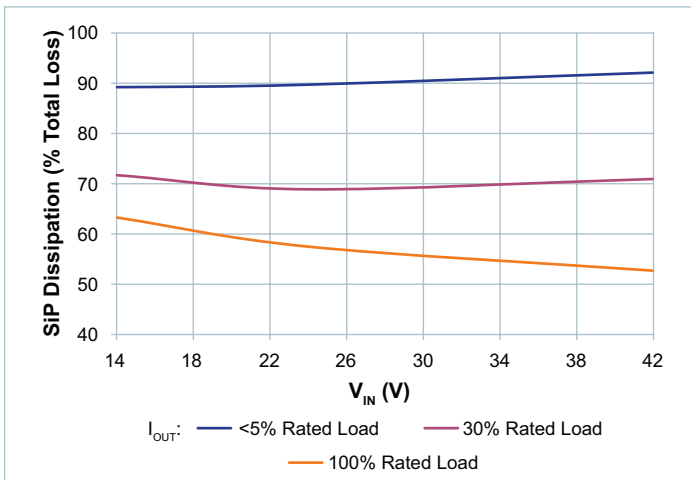


Figure 61 — PI3325-00-LGIZ

## Application Description

### Output Voltage Set Point

The PI332x-00 family of buck regulators utilizes  $V_{REF}$ , an internal reference for regulating the output voltage. The output voltage setting is accomplished using external resistors as shown in Figure 62. Select R2 to be at or around 1kΩ for best noise immunity. Use Equations 2 and 3 to determine the proper value based on the desired output voltage.

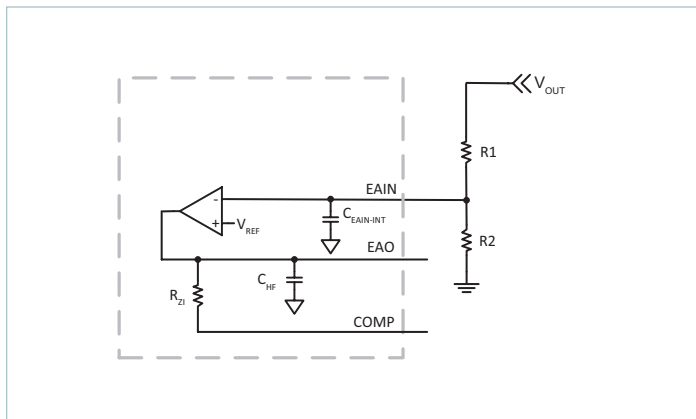

**Figure 62** — External resistor divider network

$$V_{OUT} = V_{REF} \cdot \frac{R1 + R2}{R2} \quad (2)$$

$$R1 = R2 \cdot \frac{V_{OUT} - V_{REF}}{V_{REF}} \quad (3)$$

where  $V_{REF} = V_{EAIN}$

### Soft Start Adjust and Tracking


The TRK pin offers a means to increase the regulator's soft-start time or to track with additional regulators. The soft-start slope is controlled by an internal capacitor and a fixed charge current to provide a Soft-Start Time  $t_{SS}$  for all PI332x-00 regulators. By adding an additional external capacitor to the TRK pin, the soft-start time can be increased further. The following equation can be used to calculate the proper capacitor for a desired soft-start time in excess of  $t_{SS}$ :

$$C_{TRK} = (t_{TRK} \cdot I_{TRK}) - C_{TRK\_INT} \quad (4)$$

where  $t_{TRK}$  is the soft-start time and  $I_{TRK}$  is a 50μA internal charge current (see Electrical Characteristics for limits).


In applications such as battery or super-capacitor charging where the load is pre-biased, the PI3325 can start into output voltages up to the externally applied trim setpoint, or the minimum absolute OVP, provided the value does not exceed 6V. For start up into loads which are pre-biased above 6V, an ORing FET or equivalent sub-circuit is required to decouple the buck output from the load during start up. In any application with a CV type load, the regulator must be configured in a constant-current mode of operation; the built-in current limit is a fault protection only.

There is typically either proportional or direct tracking implemented within a design. For proportional tracking between several regulators at start up, simply connect all PI332x-00 device TRK pins together. This type of tracking will force all connected regulators to start up and reach regulation at the same time (see Figure 63a).

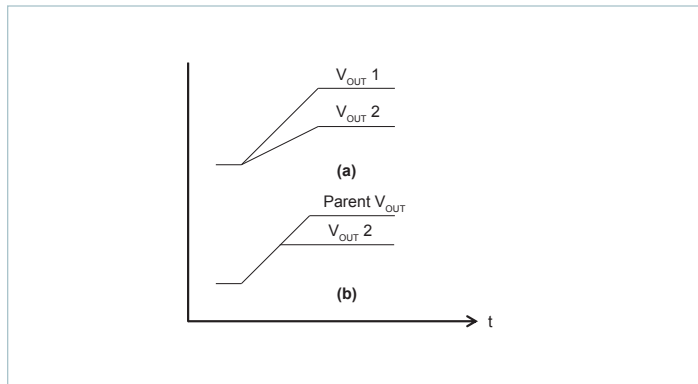

**Figure 63** — PI332x-00 tracking responses

For Direct Tracking, choose the PI332x-00 with the highest output voltage as the parent and connect the parent to the TRK pin of the other PI332x-00 regulators through a divider (Figure 64) with the same ratio as the child's feedback divider.

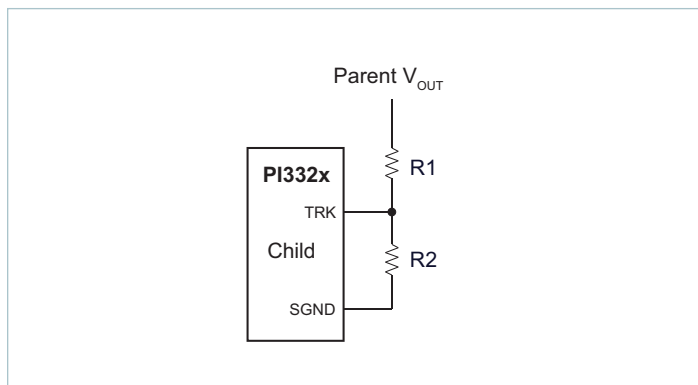

**Figure 64** — Voltage divider connections for direct tracking

All connected PI332x-00 regulator soft-start slopes will track with this method. Direct tracking timing is demonstrated in Figure 63b. All tracking regulators should have their Enable (EN) pins connected together to work properly.


### Inductor Pairing

The PI332x-00 utilizes an external inductor. This inductor has been optimized for maximum efficiency performance. Table 3 details the specific inductor value and part number utilized for each PI332x-00.

Product System	Value (nH)	MFR	Part Number	Max Operating Temp (°C)
PI3323-00-LGMZ	230	Eaton	FP2207R1-R230-R	125
		Pulse	PA4792.231HLT	
PI3325-00-LGIZ	230	Eaton	FP2207R1-R230-R	125
		Pulse	PA4792.231HLT	

**Table 3** — PI332x-00 Inductor pairing

The same inductor model may have different effective thermal impedances, depending on the model ZVS Buck paired with it. The thermal impedances are used in a virtual model of the inductor to estimate the maximum temperature, and the location of the maximum temperature may vary depending on the ZVS Buck model that the inductor is used with. This is because the effective thermal impedances are not only based on the geometry and materials used in the inductor, but include how the inductor power dissipation is distributed among core losses, DC copper losses and AC copper losses. This distribution is dependent on the ZVS Buck model that uses the inductor.

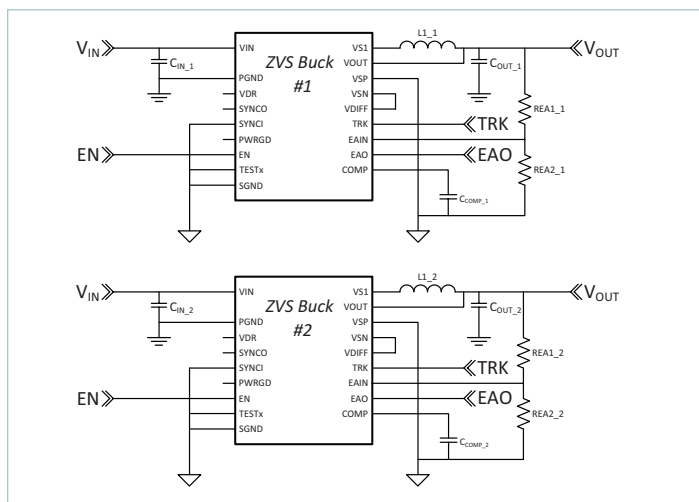

**Figure 65** — PI332x-00 parallel operation

### Parallel Operation

Multiple PI332x-00 can be connected in parallel to increase the output capability of a single output rail. When connecting modules in parallel, each EAO, TRK and EN pin should be connected together. EAIN pins should remain separated, each with an REA1 and REA2, to reject noise differences between different modules' SGND pins. Current sharing will occur automatically in this manner so long as each inductor is the same value. Refer to the Electrical Characteristics table for maximum array size and array rated output current. Current sharing may be considered independent of synchronization and/or interleaving. Modules do not have to be interleaved or synchronized to share current.

Due to the high output current capability of a single module and Critical Conduction Mode (CrCM) occurring at approximately 50% rated load, interleaving is not supported.

Use of the PI332x-00 SYNCI pin is practical only under a limited set of conditions. Synchronizing to another converter or to a fixed external clock source can result in a significant reduction in output power capability or higher than expected ripple.

### Filter Considerations

The PI332x-00 requires low impedance ceramic input capacitors (X7R/X5R or equivalent) to ensure proper start up and high-frequency decoupling for the power stage. The PI332x-00 will draw nearly all of the high-frequency current from the low-impedance ceramic capacitors when the main high-side MOSFET(s) are conducting. During the time the MOSFET(s) are off, the input capacitors are replenished from the source. Table 6 shows the recommended input and output capacitors to be used for the PI332x-00 as well as per capacitor RMS ripple current and the input and output ripple voltages. Table 5 lists the recommended input and output ceramic capacitors manufacturer and part numbers. It is very important to verify that the voltage supply source as well as the interconnecting lines are stable and do not oscillate.

#### Input filter case 1 — Inductive source and local, external, input decoupling capacitance with negligible ESR (i.e., ceramic type):

The voltage source impedance can be modeled as a series  $R_{LINE} L_{LINE}$  circuit. The high performance ceramic decoupling capacitors will not significantly damp the network because of their low ESR; therefore in order to guarantee stability the following conditions must be verified:

$$R_{LINE} > \frac{L_{LINE}}{(C_{IN\_INT} + C_{IN\_EXT}) \cdot |r_{EQ\_IN}|} \tag{5}$$

$$R_{LINE} \ll |r_{EQ\_IN}| \tag{6}$$

Where  $r_{EQ\_IN}$  can be calculated by dividing the lowest line voltage by the full load input current. It is critical that the line source impedance be at least an octave lower than the converter's dynamic input resistance, Equation 6. However,  $R_{LINE}$  cannot be made arbitrarily low otherwise Equation 5 is violated and the system will show instability, due to an under-damped RLC input network.

### Input filter case 2 — Inductive source and local, external input decoupling capacitance with significant $R_{C_{IN\_EXT}}$ ESR (i.e., electrolytic type):

In order to simplify the analysis in this case, the voltage source impedance can be modeled as a simple inductor  $L_{LINE}$ .

Notice that the high performance ceramic capacitors  $C_{IN\_INT}$  within the PI332x-00 should be included in the external electrolytic capacitance value for this purpose. The stability criteria will be:

$$|r_{EQ\_IN}| > R_{C_{IN\_EXT}} \quad (7)$$

$$\frac{L_{LINE}}{C_{IN\_INT} \cdot R_{C_{IN\_EXT}}} < |r_{EQ\_IN}| \quad (8)$$

Equation 8 shows that if the aggregate ESR is too small – for example by using very high quality input capacitors ( $C_{IN\_EXT}$ ) – the system will be under-damped and may even become destabilized. As noted, an octave of design margin in satisfying Equation 7 should be considered the minimum. When applying an electrolytic capacitor for input filter damping the ESR value must be chosen to avoid loss of converter efficiency and excessive power dissipation in the electrolytic capacitor.

### VDR Bias Regulator

The VDR internal bias regulator is a ZVS switching regulator that resides internal to the PI332x-00 SiP. It is intended primarily to power the internal controller and driver circuitry. The power capability of this regulator is sized for the PI332x-00, with adequate reserve for the application it was intended for.

It may be used for as a pullup source for open collector applications and for other very low power uses with the following restrictions:

1. The total external loading on VDR must be less than  $I_{VDR}$ .

2. No direct connection is allowed. Any noise source that can disturb the VDR voltage can also affect the internal controller operation. A series impedance is required between the VDR pin and any external circuitry.
3. All loads must be locally decoupled using a 0.1 $\mu$ F ceramic capacitor. This capacitor must be connected to the VDR output through a series resistor no smaller than 1k $\Omega$ , which forms a low-pass filter.

### Additional System Design Considerations

1. **Inductive loads:** As with all power electronic applications, consideration must be given to driving inductive loads that may be exposed to a fault in the system which could result in consequences beyond the scope of the power supply primary protection mechanisms. An inductive load could be a filter, fan motor or even excessively long cables. Consider an instantaneous short circuit through an un-damped inductance that occurs when the output capacitors are already at an initial condition of fully charged. The only thing that limits the current is the inductance of the short circuit and any series resistance. Even if the power supply is off at the time of the short circuit, the current could ramp up in the external inductor and store considerable energy. The release of this energy will result in considerable ringing, with the possibility of ringing nodes connected to the output voltage below ground. The system designer should plan for this by considering the use of other external circuit protection such as load switches, fuses and transient voltage protectors. The inductive filters should be critically damped to avoid excessive ringing or damaging voltages. Adding a high-current Schottky diode from the output voltage to PGND close to the PI332x-00 is recommended for these applications.
2. **Low-voltage operation:** There is no isolation from an SELV (Safety-Extra-Low-Voltage) power system. Powering low voltage loads from input voltages as high as 60V may require additional consideration to protect low voltage circuits from excessive voltage in the event of a short circuit from input to output. A fast TVS (transient voltage suppressor) gating an external load switch is an example of such protection.

Manufacturer	Part Number	Value	Description
Murata	GRM32ER71A476KE15	47 $\mu$ F	47 $\mu$ F 10V 1210 X7R
Murata	GRM32ER71A476K	4.7 $\mu$ F	4.7 $\mu$ F 80V 1210 X7R
Murata	GRM32EC70J107ME15K	100 $\mu$ F	100 $\mu$ F 6.3V 1210 X7S

**Table 5** — Recommended input and output capacitor components


Product	Load Current (A)	$C_{IN}$	$C_{OUT}$	$C_{IN}$ Ripple Current ( $I_{RMS}$ )	$C_{OUT}$ Ripple Current ( $I_{RMS}$ )	$V_{IN}$ Ripple (mVpp)	$V_{OUT}$ Ripple (mVpp)	Load Step (% Rating) (1A/ $\mu$ s)	Transient Deviation Excluding Ripple (mVpk)	$V_{OUT}$ Recovery Time ( $\mu$ s)
PI3323-00-LGMZ	22	8 x 4.7 $\mu$ F	8 x 100 $\mu$ F	10.85	14.5	540	67	50 – 100	110	<90
PI3325-00-LGIZ	20	6 x 4.7 $\mu$ F	12 x 47 $\mu$ F	10.43	13.25	512	55.7	50 – 100	90	<80

**Table 6** — Recommended input and output capacitor quantity and performance at nominal line, nominal trim.

## Layout Guidelines


To optimize maximum efficiency and low noise performance from a PI332x-00 design, layout considerations are necessary. Reducing trace resistance and minimizing high-current loop returns along with proper component placement will contribute to optimized performance.

A typical buck converter circuit is shown in Figure 66. The potential areas of high parasitic inductance and resistance are the circuit return paths, shown as LR below.

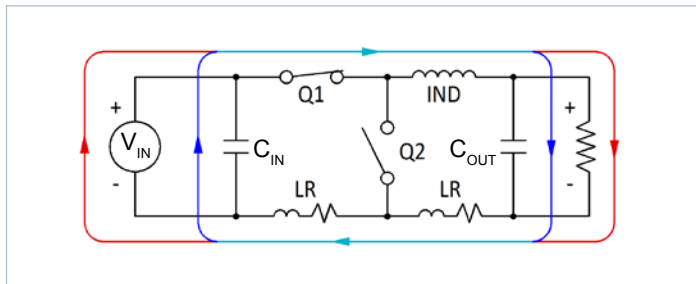


**Figure 66** — Typical buck regulator

The path between the  $C_{OUT}$  and  $C_{IN}$  capacitors is of particular importance since the AC currents are flowing through both of them when Q1 is turned on. Figure 67, schematically, shows the reduced trace length between input and output capacitors. The shorter path lessens the effects that copper trace parasitics can have on the PI332x-00 performance.

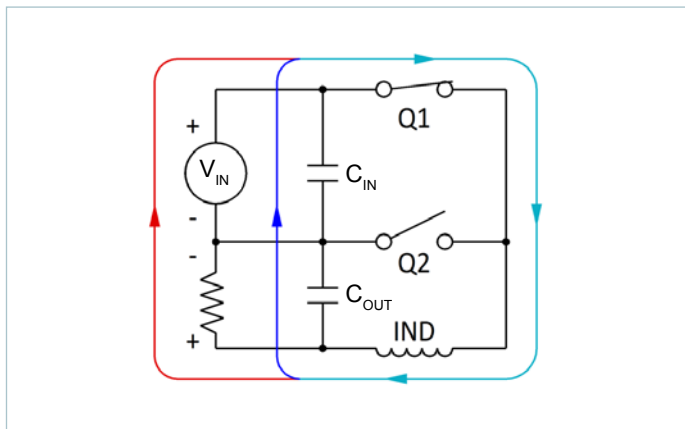


**Figure 67** — Current flow: Q1 closed

When Q1 is on and Q2 is off, the majority of  $C_{IN}$ 's current is used to satisfy the output load and to recharge the  $C_{OUT}$  capacitors. When Q1 is off and Q2 is on, the load current is supplied by the inductor and the  $C_{OUT}$  capacitor as shown in Figure 68. During this period  $C_{IN}$  is also being recharged by the  $V_{IN}$ . Minimizing  $C_{IN}$  loop inductance is important to reduce peak voltage excursions when Q1 turns off. Also, the difference in area between the  $C_{IN}$  loop and  $C_{OUT}$  loop is vital to minimize switching and GND noise.

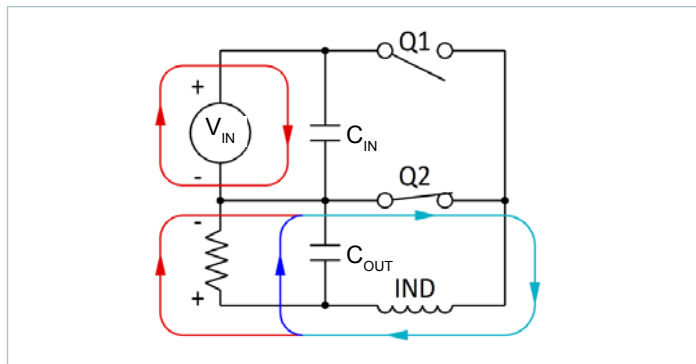


**Figure 68** — Current flow: Q2 closed

Figure 69 illustrates the tight path between  $C_{IN}$  and  $C_{OUT}$  (and  $V_{IN}$  and  $V_{OUT}$ ) for the high AC return current. The PI332x-00 evaluation board uses a layout optimized for performance in this way.

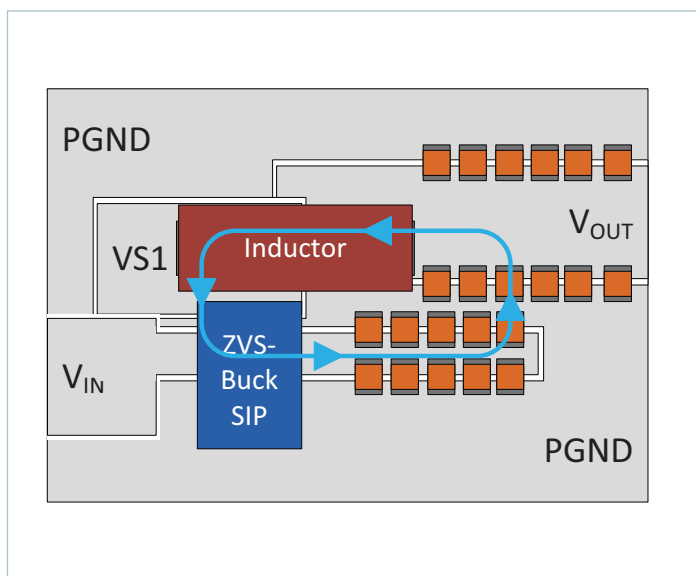





**Figure 69** — Recommended layout for optimized AC current within the SiP, inductor and ceramic input and output capacitors

LGA Recommended PCB Footprint and Stencil

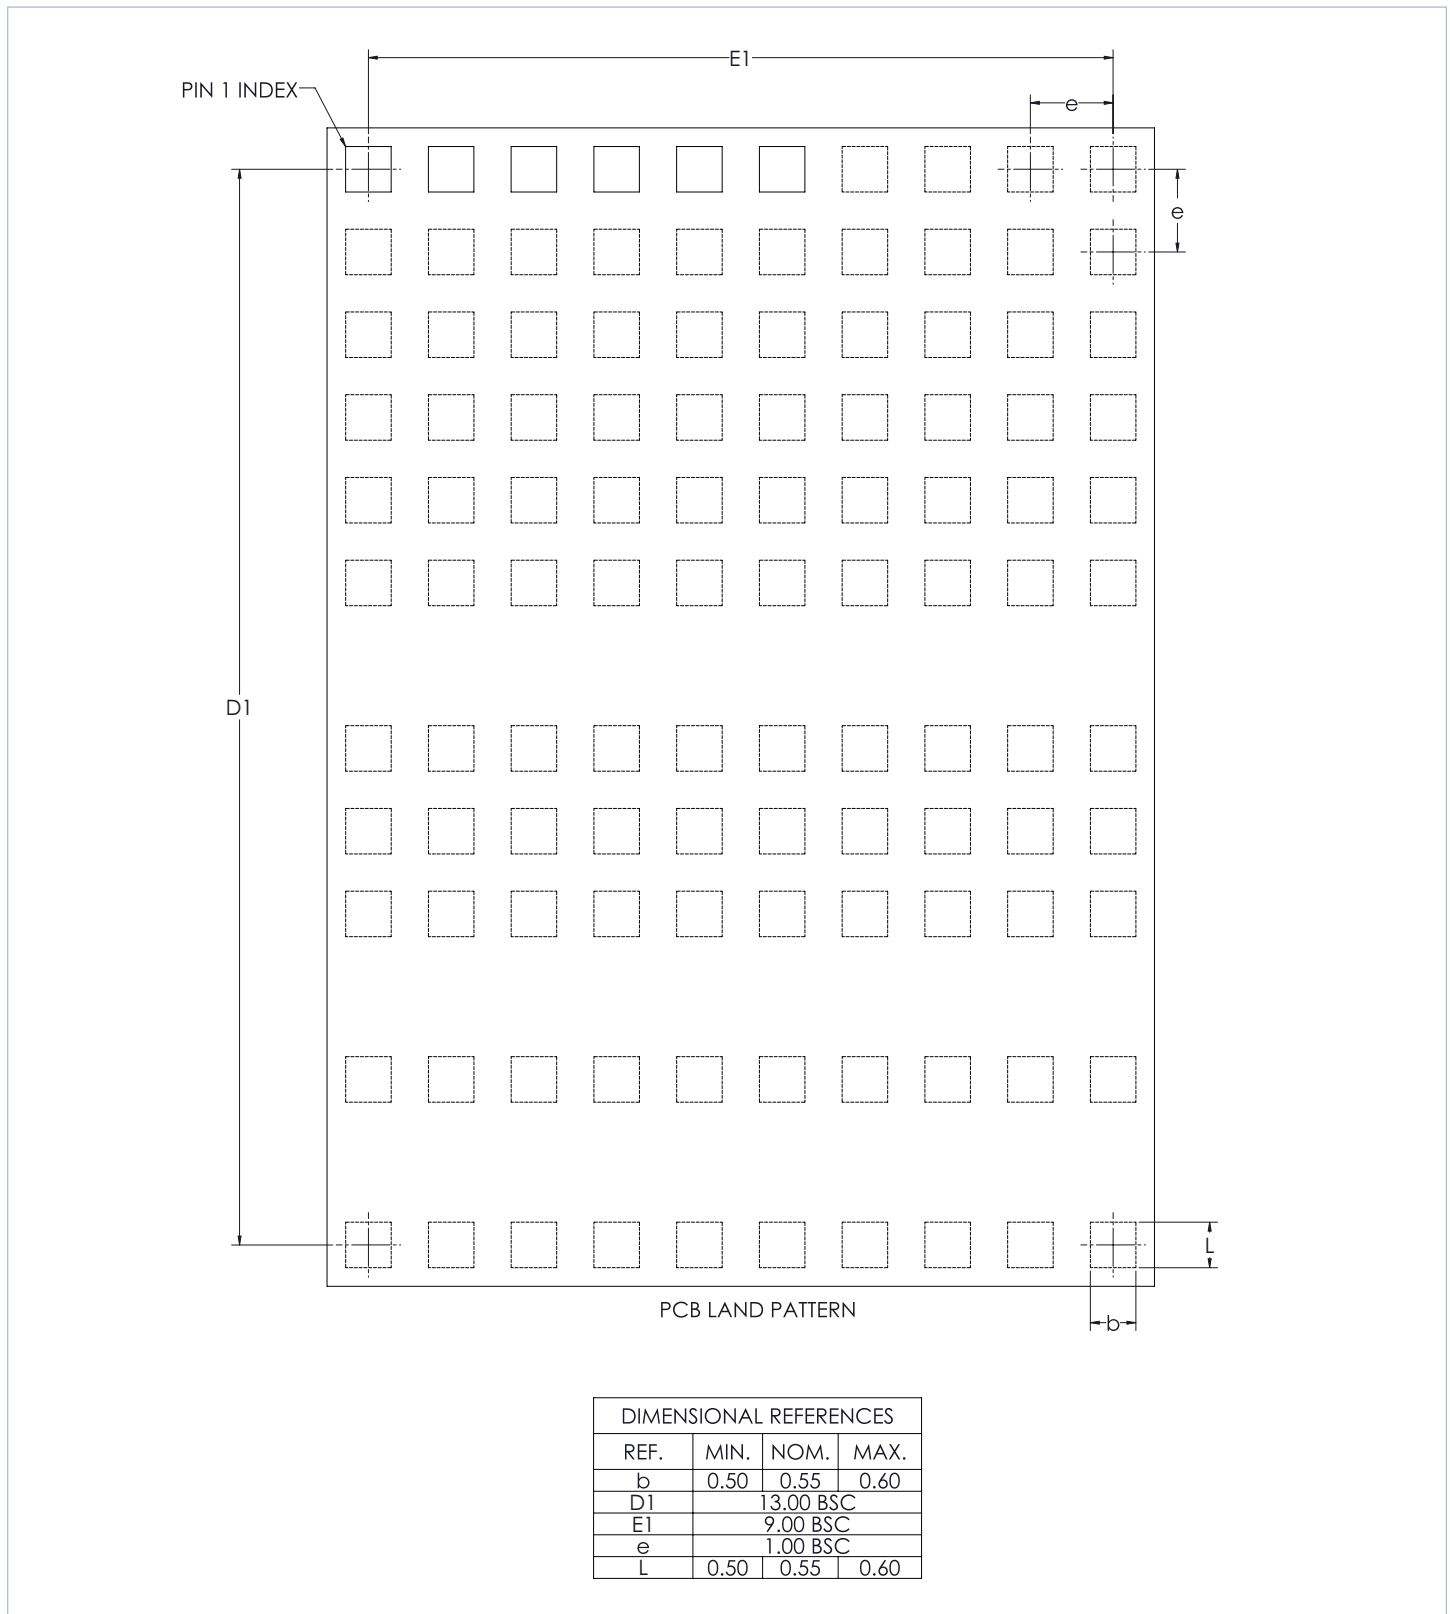

Recommended receiving footprint for PI3325-00 10 x 14mm package. All pads should have a final copper size of 0.55 x 0.55mm, whether they are solder-mask defined or copper defined, on a 1 x 1mm grid. All stencil openings are 0.45mm when using either a 5mil or 6mil stencil.

LGA Package Drawings

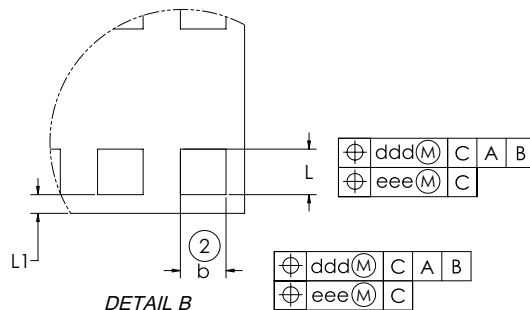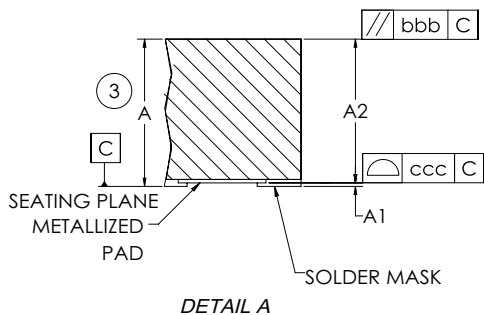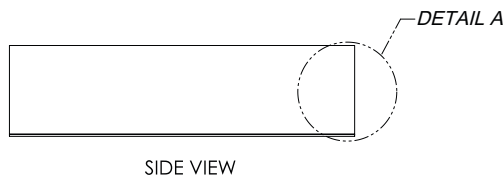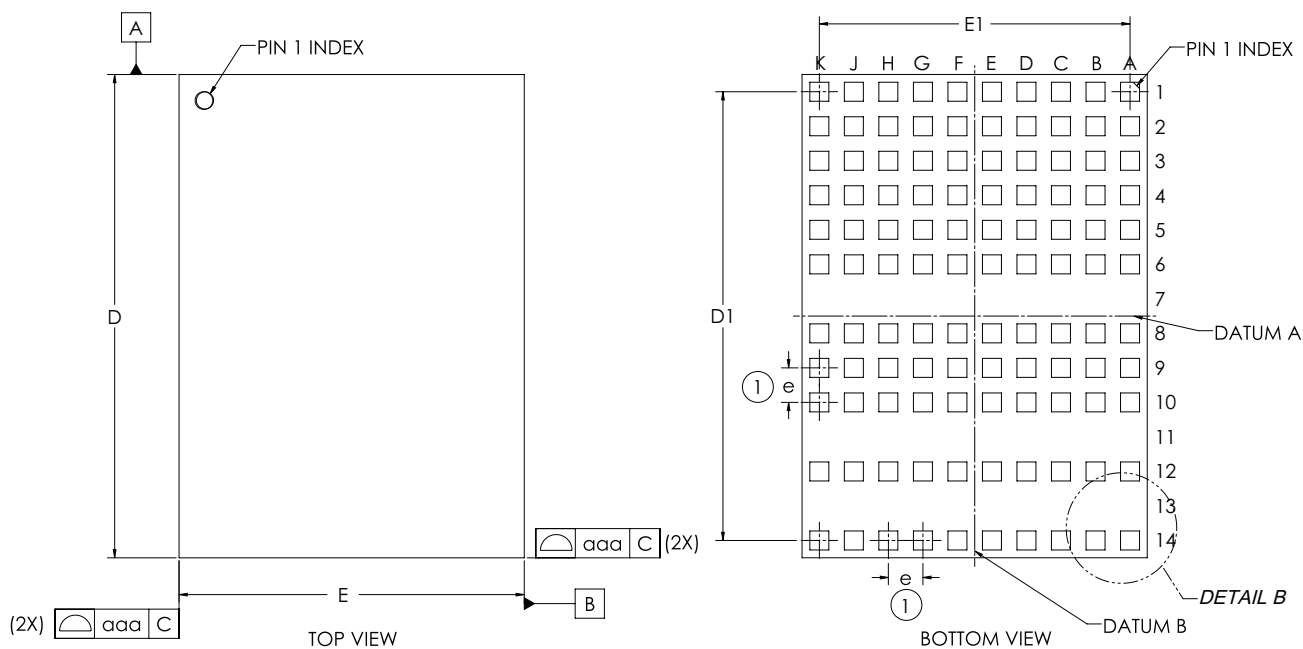

BB 10x14mm SiP	
DIMENSIONAL REFERENCES	
REF.	TOLERANCE OF FORM AND POSITION
aaa	0.10
bbb	0.10
ccc	0.08
ddd	0.10
eee	0.08

BB 10x14mm SiP			
DIMENSIONAL REFERENCES			
REF	MIN.	NOM.	MAX.
A	2.49	2.56	2.63
A1	--	--	0.04
A2	--	--	2.59
b	0.50	0.55	0.60
L	0.50	0.55	0.60
D	14.00 BSC		
E	10.00 BSC		
D1	13.00 BSC		
E1	9.00 BSC		
e	1.00 BSC		
L1	.175	0.225	.275

NOTES:

- 'e' REPRESENTS THE BASIC TERMINAL PITCH. SPECIFIES THE GEOMETRIC POSITION OF THE TERMINAL AXIS.
- DIMENSION 'b' APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.00mm AND 0.25mm FROM TERMINAL TIP.
- DIMENSION 'A' INCLUDES PACKAGE WARPAGE.
- EXPOSED METALLIZED PADS ARE CU PADS WITH SURFACE FINISH PROTECTION.
- ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
- RoHS COMPLIANT PER CST-0001 LATEST REVISION.

## Revision History

Revision	Date	Description	Page Number(s)
1.0	12/05/17	Initial release	n/a
1.1	02/06/18	Added typical start-up waveforms	14
1.2	07/25/19	Updated figure 28 Removed note	14 20
1.3	04/17/20	Added PI3323-00 part numbers, and BGIZ, BGMZ, BGMP options Updated PI3325 enabled input quiescent current Added BGA drawings	1, 3, 8 – 14, 22, 26, 28, 29 8 33, 34
1.4	06/22/20	Updated to add recommended Pulse Electronics inductor	28
1.5	08/12/20	Updated terminology	27
1.6	02/22/21	Updated to include PI3323-00-LGMZ, PI3325-00-LGMZ	1, 3, 7, 8, 9, 15, 16
1.7	05/06/21	Added PI3323-00-LGIZ part number, removed BGIZ, BGMZ and BGMP options	1, 3, 7 – 9, 15, 16, 22
1.8	10/11/23	Removed PI3323-00-LGIZ, PI3325-00-LGMZ (now end of life, see <a href="#">separate document</a> )	All

Please note: Pages added in Rev 1.3, pages removed in Rev 1.7.

**Vicor's comprehensive line of power solutions includes high density AC-DC and DC-DC modules and accessory components, fully configurable AC-DC and DC-DC power supplies, and complete custom power systems.**

Information furnished by Vicor is believed to be accurate and reliable. However, no responsibility is assumed by Vicor for its use. Vicor makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication. Vicor reserves the right to make changes to any products, specifications, and product descriptions at any time without notice. Information published by Vicor has been checked and is believed to be accurate at the time it was printed; however, Vicor assumes no responsibility for inaccuracies. Testing and other quality controls are used to the extent Vicor deems necessary to support Vicor's product warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

**Specifications are subject to change without notice.**

Visit <https://www.vicorpower.com/dc-dc-converters-board-mount/cool-power-pi33xx-and-pi34xx> for the latest product information.

### **Vicor's Standard Terms and Conditions and Product Warranty**

All sales are subject to Vicor's Standard Terms and Conditions of Sale, and Product Warranty which are available on Vicor's webpage (<https://www.vicorpower.com/termsconditionswarranty>) or upon request.

### **Life Support Policy**

VICOR'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF VICOR CORPORATION. As used herein, life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness. Per Vicor Terms and Conditions of Sale, the user of Vicor products and components in life support applications assumes all risks of such use and indemnifies Vicor against all liability and damages.

### **Intellectual Property Notice**

Vicor and its subsidiaries own Intellectual Property (including issued U.S. and Foreign Patents and pending patent applications) relating to the products described in this data sheet. No license, whether express, implied, or arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Interested parties should contact Vicor's Intellectual Property Department.

The products described on this data sheet are protected by U.S. Patents. Please see [www.vicorpower.com/patents](http://www.vicorpower.com/patents) for the latest patent information.

Contact Us: <https://www.vicorpower.com/contact-us>

**Vicor Corporation**

25 Frontage Road  
Andover, MA, USA 01810  
Tel: 800-735-6200  
Fax: 978-475-6715  
[www.vicorpower.com](http://www.vicorpower.com)

**email**

Customer Service: [custserv@vicorpower.com](mailto:custserv@vicorpower.com)  
Technical Support: [apps@vicorpower.com](mailto:apps@vicorpower.com)

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PI3325-00-LGIZ on WIN SOURCE](#)

 [Vicor Corporation](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management