




**THE DATASHEET OF  
TDG1026KS-C5E**







THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 7409: UPDATED PER NEW SUPPLIER SPEC	5/19/14	D. CASTRO

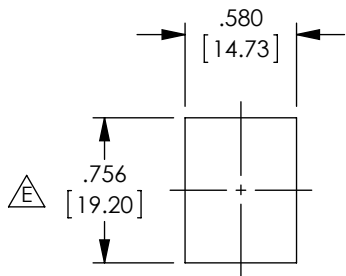

RECOMMENDED PANEL OPENING

WIRING	
PIN 1	PIN 1
PIN 2	PIN 2
PIN 3	PIN 3
PIN 4	PIN 4
PIN 5	PIN 5
PIN 6	PIN 6
PIN 7	PIN 7
PIN 8	PIN 8
SHIELD	SHIELD

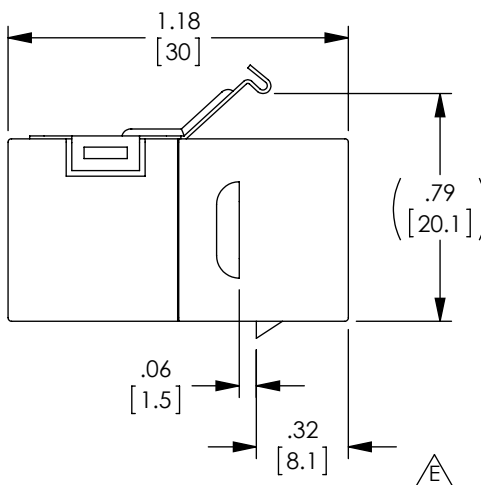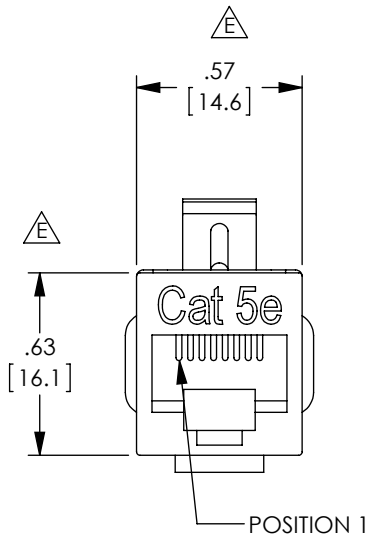

**NOTES:**

**MATERIAL:**  
 HOUSING: ABS, UL94V-0, COLOR: BLACK.  
 CONTACTS: PHOSPHOR BRONZE  
 CONTACT PLATING: GOLD, 50 μ INCHES OVER NICKEL PLATE.  
 SHIELD: BRASS WITH NICKEL PLATE.

**ELECTRICAL:**  
 DC CURRENT RATING: 1.5 AMP (MAX.)  
 VOLTAGE RATING: 150 VOLTS  
 INSULATION RESISTANCE: 500MΩ

**MISCELLANEOUS:**  
 RATING: CATEGORY 5E  
 OPERATING TEMPERATURE RANGE: -10°C TO +60°C.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

**REGULATORY COMPLIANCE:**  
 CE2011/65/EU (RoHS DIRECTIVE)



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. PARHAM	4/8/2004		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.3]	CHECKED BY T. CLARK	4/9/2004	CATEGORY TELECOM/MODULAR	
	APPROVED BY C. McCORMICK	4/12/2004	PRODUCT DESCRIPTION CAT 5E SHLD RJ45 KEYSTONE CPLR	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
			DWG. NO. TDG1026KS-C5E	REV. <b>E</b>
			SCALE: NONE	CAD FILE: TDG1026KS-C5E.SLDRW
				SHEET 1 OF 1

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View TDG1026KS-C5E on WIN SOURCE](#)

 [L-com Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management