




**THE DATASHEET OF
NP50TD6G-5W**



①②③④⑤⑥⑦⑧⑨

STAMP : SERIAL No.

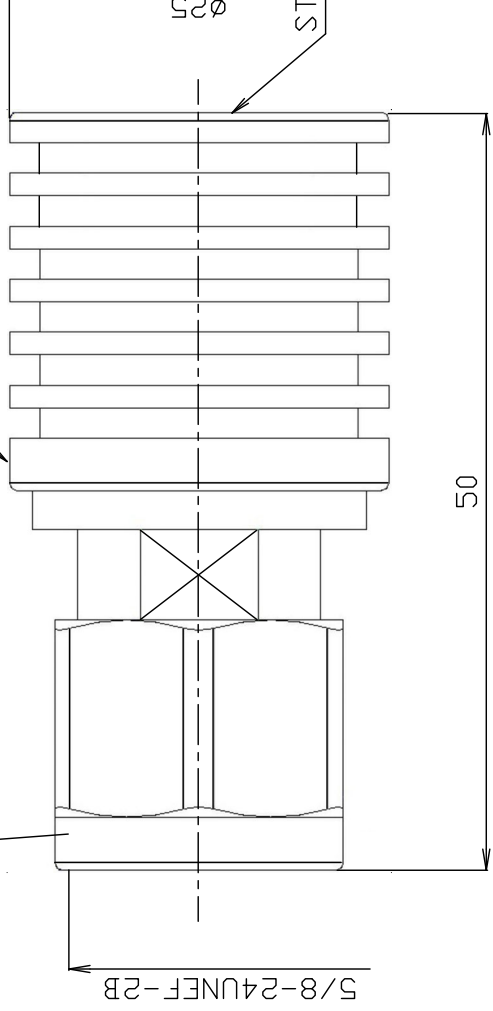

- *1: TERNARY PLATING
- *2: ANODIZING<BLACK>
- *3: PHOSPHOR BRONZE
- *4: STAINLESS STEEL

9	RESISTOR	--	1	--									
8	HEAT SINK	ALUMINUM	1	*2									
7	O-RING	SILICONE	1	--				SCALE	2/1				
6	INSULATOR	PTFE	1	--									
5	HOLDING RING	*4	1	--									
4	BODY	BRASS	1	*1				UNIT	mm				
3	GASKET	SILICONE	1	--									
2	CENTER PIN	*3	1	Au									
1	COUPLING NUT	BRASS	1	*1				DATE	2023.12.15				
NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH				REMARK					

DRAWN	井出	'23.12.15
INSPECTED	檜澤	'23.12.15
APPR		'23.12.15
PROJECTION	◎	◎
	株式会社	70-

PRODUCT SPECIFICATIONS

Part No. NP50TD6G-5W

No. 0512084

DWG No. W-0515373

Nominal 1 Standard JIS C 5411
 2 Frequency range 6GHz
 3 Impedance 50Ω
 4 Power handling 5W
 5 [OPR]Temp-Range -45°C~+85°C





		Test Items	Procedures/Test method	Requirements
DESIGN	1	Design & construction	Specified on relevant product drawing (DWG No. W-0515373)	No defects or abnormalities
	2	Materials		
	3	Finishes		
ELECTRICAL	4	V. S. W. R	DC~6GHz	1. 25 (Max.)
	5	Compatibility	Connecting with a standard-compliant connector	No defects or abnormalities
MECHANICAL	6	Tensile strength of coupling mechanism	At axial tensile force 300N	No defects or abnormalities
	7	Connection nut tightening torque	0. 7~1. 1N·m	No defects or abnormalities
ENVIRONMENTAL	8	Waterproof	IPX7	No water ingress inside the connector

	Remarks	Date
1		
2		
3		

Checked	Approved	Inspected	Prepared
三	山	檜	渡邊
19.04.02	19.04.02	19.04.02	'19,04,02
村	本	澤	直弘

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View NP50TD6G-5W on WIN SOURCE](#)
-  [TYCLON Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management