




**THE DATASHEET OF
MXHQ87WA3000**



SPECIFICATION

1. MECHANICAL

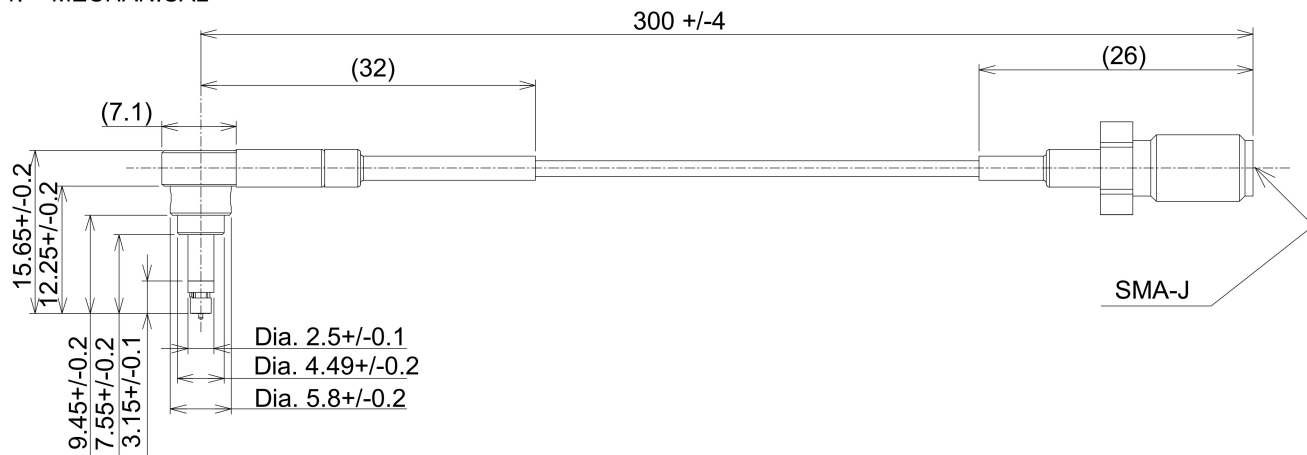

SCALE:FREE
UNIT: mm

2. RATING:

Item	Specification
Voltage Rating	250Vr.m.s. maximum
Nominal Frequency Range	DC to 11GHz
Nominal Impedance	50Ω
Temperature Rating	-40°C to +85°C
Insulation Resistance	500 MΩ minimum
Withstanding Voltage	AC 300V±20V
Initial Contact Resistance (without conductor resistance)	Center contact 70.0mΩmax. Outer contact 20.0mΩmax.
A> Voltage Standing Wave Ratio (V.S.W.R.)	Meet the requirements of following spec. 1.5max. (DC~3GHz) 1.8max. (3~6GHz) 3.5max. (6~11GHz)
A> Insertion loss	1.5dB max.(DC~3GHz) 2.5dB max.(3~6GHz) 4.5dB max.(6~11GHz)
A> Durability	2K cycles
Engage and disengage force. (PROBE side only)	a. Engagement 30N maximum b. Disengagement 5N minimum 35N maximum

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View MXHQ87WA3000 on WIN SOURCE](#)
- ⊖ [Murata Electronics North America Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management