




**THE DATASHEET OF  
2SC4672-R**



## NPN Transistors

### ■ Features

- Low Saturation Voltage
- Excellent hFE Characteristics
- Complementary to 2SA1797

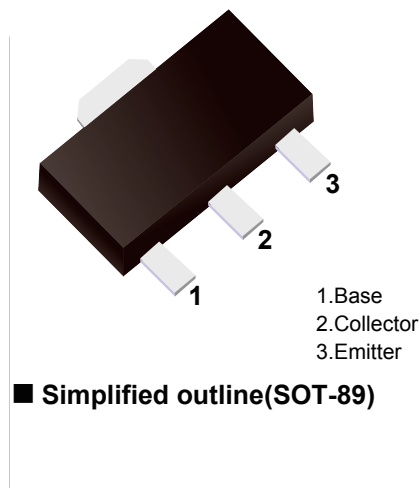

### ■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V <sub>CB0</sub>	60	V
Collector - Emitter Voltage	V <sub>CE0</sub>	50	
Emitter - Base Voltage	V <sub>EB0</sub>	6	
Collector Current - Continuous	I <sub>c</sub>	2	A
Collector Power Dissipation	P <sub>c</sub>	500	mW
Thermal Resistance From Junction To Ambient	R <sub>θJA</sub>	250	°C/W
Junction Temperature	T <sub>J</sub>	150	°C
Storage Temperature Range	T <sub>stg</sub>	-55 to 150	


### ■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V <sub>CB0</sub>	I <sub>c</sub> = 50 μA, I <sub>E</sub> = 0	60			V
Collector- emitter breakdown voltage	V <sub>CE0</sub>	I <sub>c</sub> = 1 mA, I <sub>B</sub> = 0	50			
Emitter - base breakdown voltage	V <sub>EB0</sub>	I <sub>E</sub> = 50 μA, I <sub>c</sub> = 0	6			
Collector-base cut-off current	I <sub>CB0</sub>	V <sub>CB</sub> = 60V, I <sub>E</sub> = 0			0.1	μA
Emitter cut-off current	I <sub>EB0</sub>	V <sub>EB</sub> = 5V, I <sub>c</sub> =0			0.1	
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>c</sub> =1A, I <sub>B</sub> =50mA			0.35	V
Base - emitter saturation voltage	V <sub>BE(sat)</sub>	I <sub>c</sub> =1A, I <sub>B</sub> =50mA			1.2	
DC current gain	hFE	V <sub>CE</sub> = 2V, I <sub>c</sub> = 500mA	82		390	
Collector output capacitance	C <sub>ob</sub>	V <sub>CB</sub> = 10V, I <sub>E</sub> = 0, f=1MHz		25		pF
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> = 2V, I <sub>c</sub> = 500mA, f=100MHz		210		MHz


### ■ Classification of hfe

Type	2SC4672-P	2SC4672-Q	2SC4672-R
Range	82-180	120-270	180-390
Marking	DKP	DKQ	DKR

■ Typical Characteristics

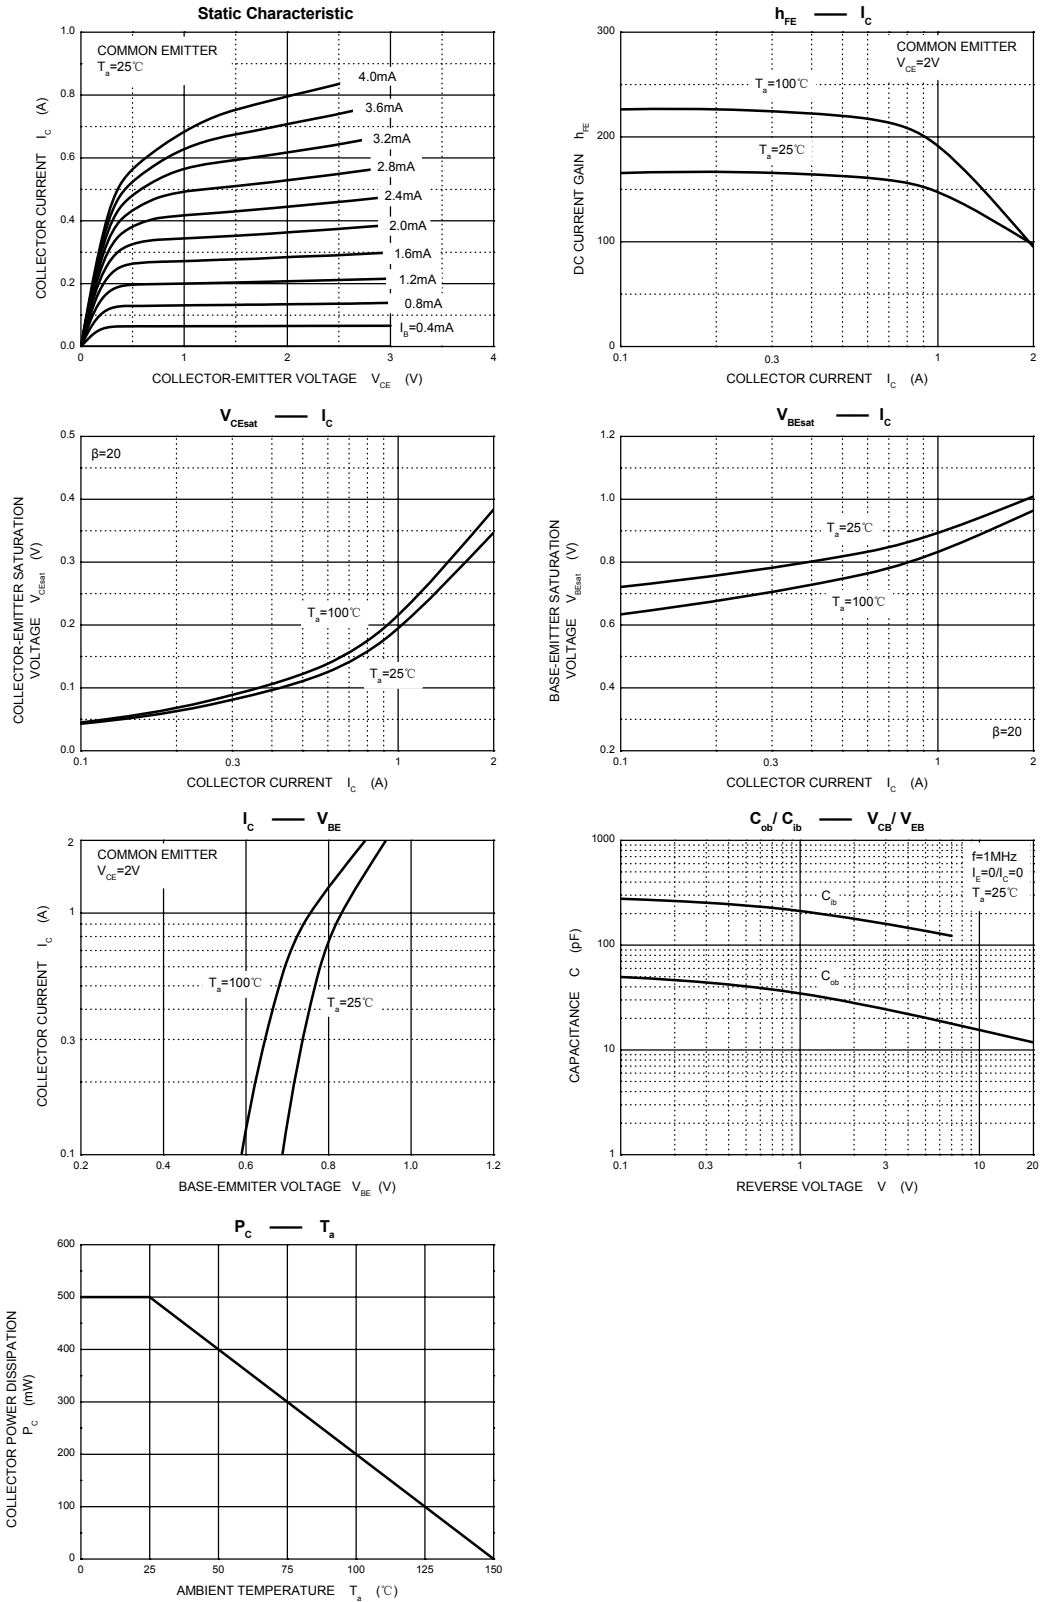

■ SOT-89

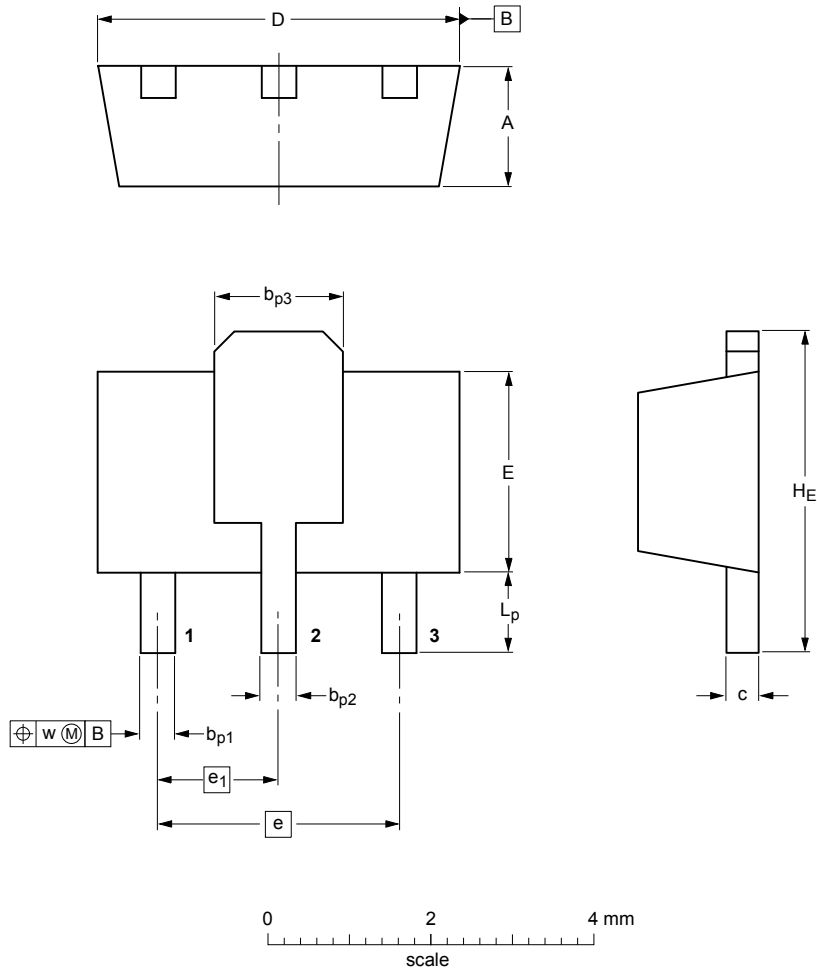

**DIMENSIONS (mm are the original dimensions)**

UNIT	A	$b_{p1}$	$b_{p2}$	$b_{p3}$	c	D	E	e	$e_1$	$H_E$	$L_p$	w
mm	1.6	0.48	0.53	1.8	0.44	4.6	2.6	3.0	1.5	4.25	1.2	0.13
	1.4	0.35	0.40	1.4	0.23	4.4	2.4			3.75		

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View 2SC4672-R on WIN SOURCE](#)
- [ShenZhen SikorMicro Semicon Co. Ltd Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management