

Features

- 5.0*1.7mm*10 Segments
- Bar Graph
- Black Face, White Segment
- Easy assembly
- RoHS Compliant, Pb Free

Applications

- Consumer Electronics
- Industrial Equipment

Description

The INBD-T11020.XNB series is 5.0*1.7mm*10 Segments display. It is a Through Hole type LED display which can be used in various applications.

Internal Circuit Diagram

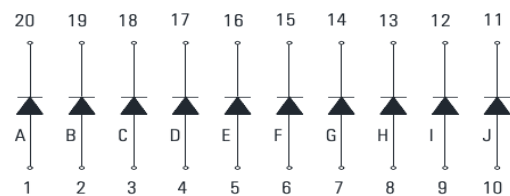


Figure 1. INBD-T11020.XNB Internal Circuit Diagram

Package Dimensions & All Light On Segments Feature

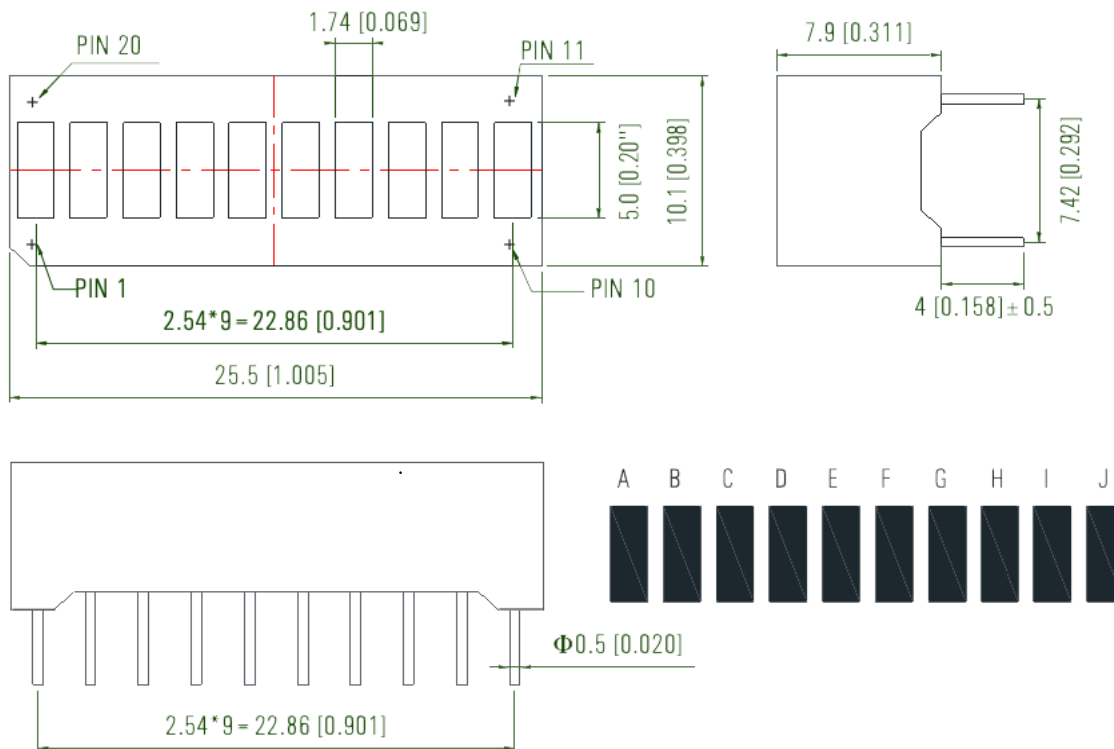


Figure 2. INBD-T11020.XNB Package Dimensions

Notes

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25 mm (.010") unless otherwise noted.

Absolute Maximum Rating at 25°C (Note 1)

Product (Per Segment)	Emission Color	Pd (mW)	IF (mA)	IFP* (mA)	VR (V)	T _{OP} (°C)	T _{ST} (°C)
INBD-T11020.YGNB	Yellow Green	50	20	25	5	-40°C~+80°C	-40°C~+85°C
INBD-T11020.ANB	Amber	50	20	25	5	-40°C~+80°C	-40°C~+85°C
INBD-T11020.RNB	Red	50	20	25	5	-40°C~+80°C	-40°C~+85°C
INBD-T11020.BNB	Blue	65	20	25	5	-40°C~+80°C	-40°C~+85°C
INBD-T11020.WNB	White	65	20	25	5	-40°C~+80°C	-40°C~+85°C

Notes

1. Condition for IFP is pulse of 1/10 duty and 0.1msec width

Electrical Characteristics $T_A = 25^\circ\text{C}$ (Note)

Product (Per Segment)	Emission Color	$V_F(\text{V})@20\text{mA}$			$\lambda(\text{nm})@20\text{mA}$		$I_V^*(\text{mcd})@10\text{mA}$			$I_V^*(\text{mcd})@20\text{mA}$			$I_R(\mu\text{A})@V_R=5\text{V}$	$I_{V-M}@I_F=10\text{mA}$
		min	typ.	max	λ_D	λ_P	min	typ.	max	min	typ.	max	max	max
INBD-T11020.YGNB	Yellow Green	-	2	2.4	572	575	5	10	-	10	20	-	50	2:1
INBD-T11020.ANB	Amber	-	2.1	2.4	605	610	13	25	-	25	50	-	50	2:1
INBD-T11020.RNB	Red	-	2	2.4	624	632	20	40	-	40	80	-	50	2:1
INBD-T11020.BNB	Blue	-	2.9	3.1	470	468	15	30	-	30	60	-	50	2:1
INBD-T11020.WNB	White	-	2.9	3.1	X: 0.3 Y: 0.31		38	75	-	75	150	-	50	2:1

Notes

1. Performance guaranteed only under conditions listed in above tables.
2. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
3. The dominant wavelength (λ_D) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
4. Luminous Intensity is an average value which is measured one 7-segment. Tolerance of Luminous Intensity: $\pm 10\%$.
5. Excess driving current and / or operating temperature higher than recommended conditions may result in severe light degradation or premature failure.
6. The chromaticity coordinates (x, y) is derived from the 1931 CIE chromaticity diagram.

ESD Precaution

ATTENTION: Electrostatic Discharge (ESD) protection








The symbol above denotes that ESD precaution is needed. ESD protection for GaP and AlGaAs based chips is necessary even though they are relatively safe in the presence of low static-electric discharge. Parts built with AlInGaP, GaN, or/and InGaN based chips are STATIC SENSITIVE devices. ESD precaution must be taken during design and assembly.

If manual work or processing is needed, please ensure the device is adequately protected from ESD during the process.

Please be advised that normal static precautions should be taken in the handling and assembly of this device to prevent damage or degradation which may be induced by electrostatic discharge (ESD).






Characteristic Curves-Per Die Yellow Green

(Ta = 25°C Unless Otherwise Noted)

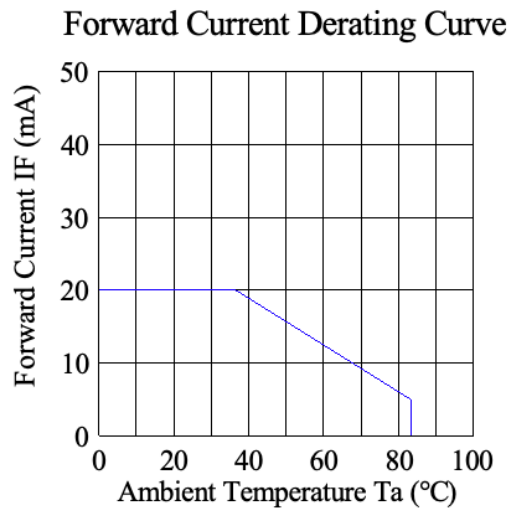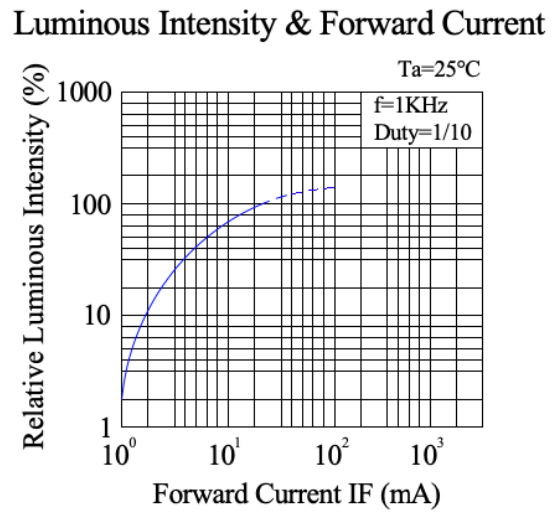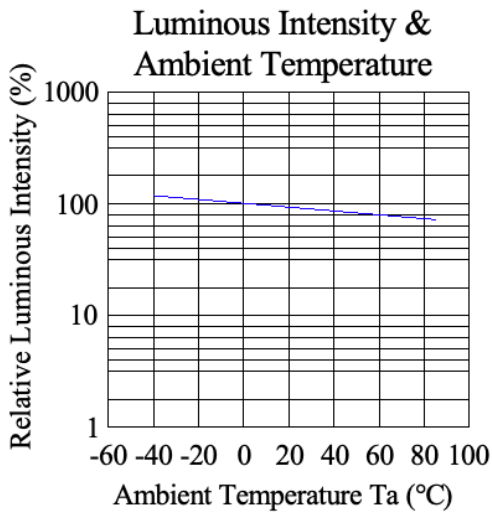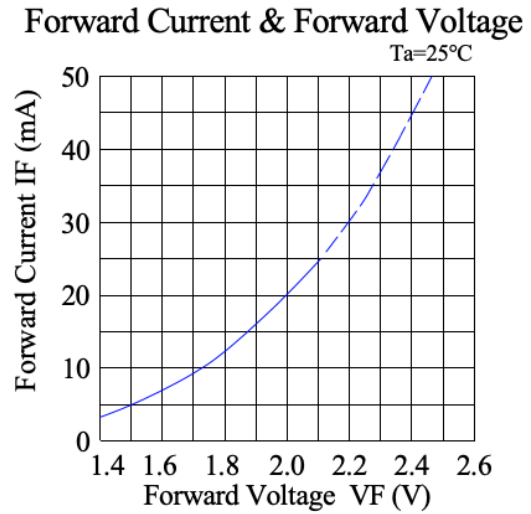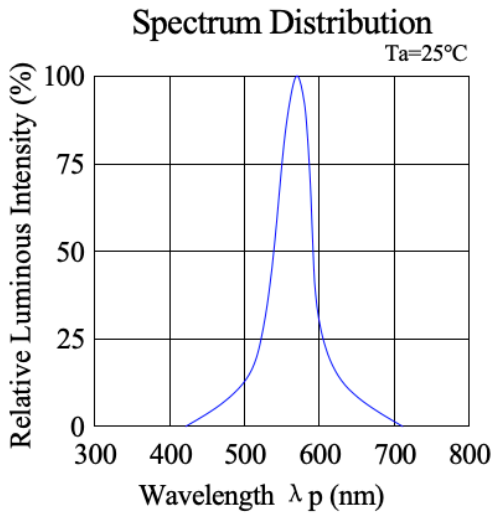






Characteristic Curves-Per Die Amber

(Ta = 25°C Unless Otherwise Noted)

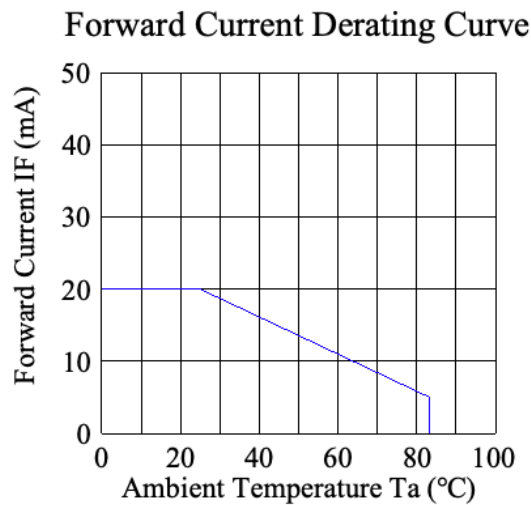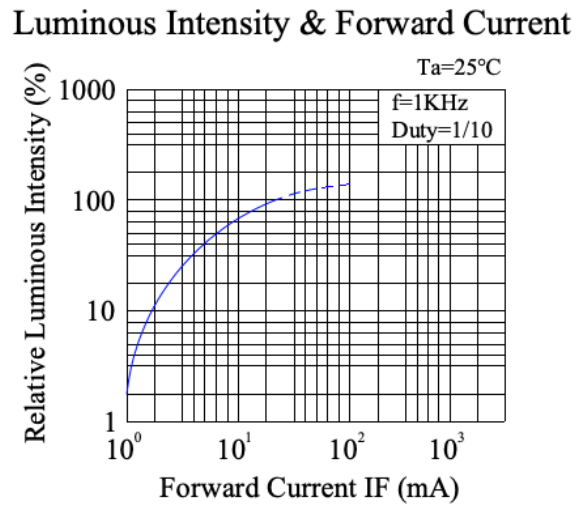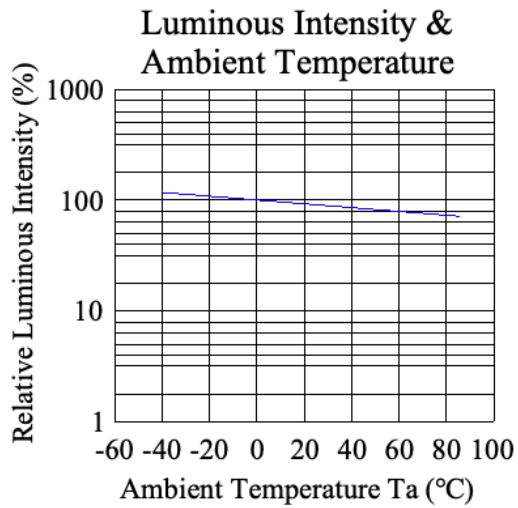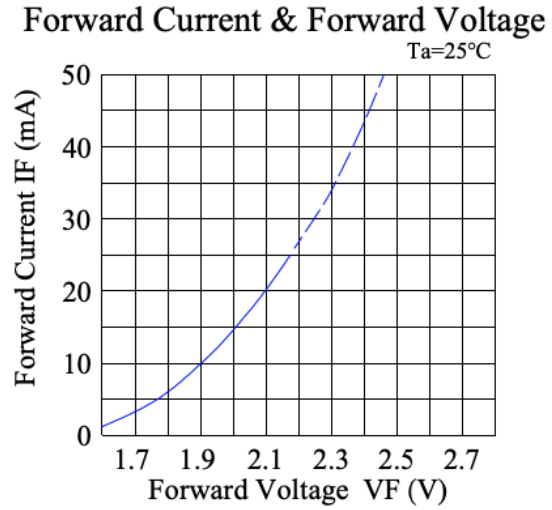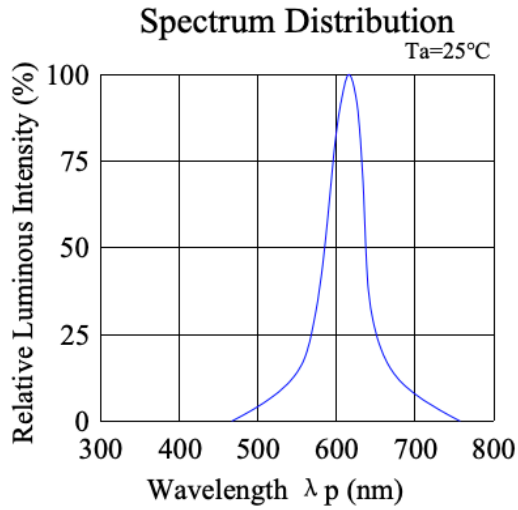






Characteristic Curves-Per Die Red

(Ta = 25°C Unless Otherwise Noted)

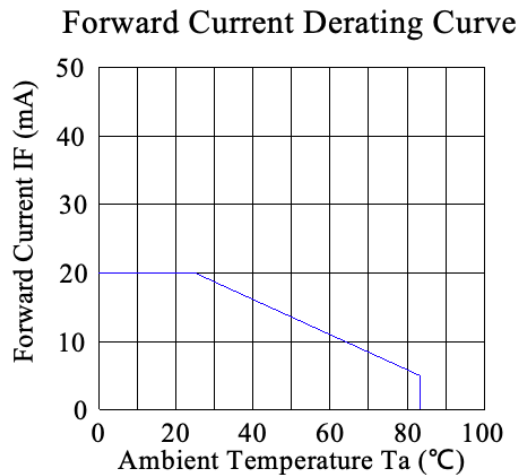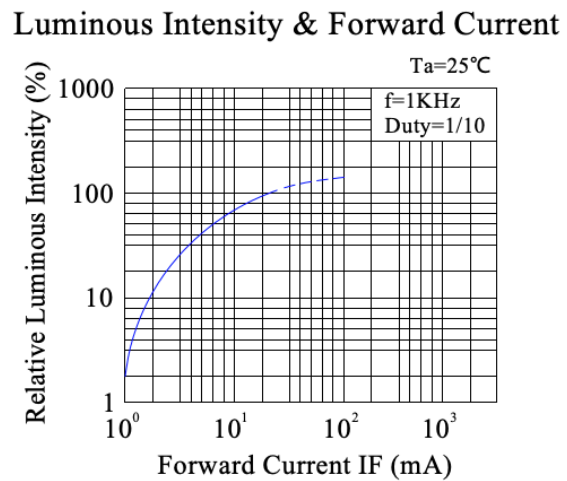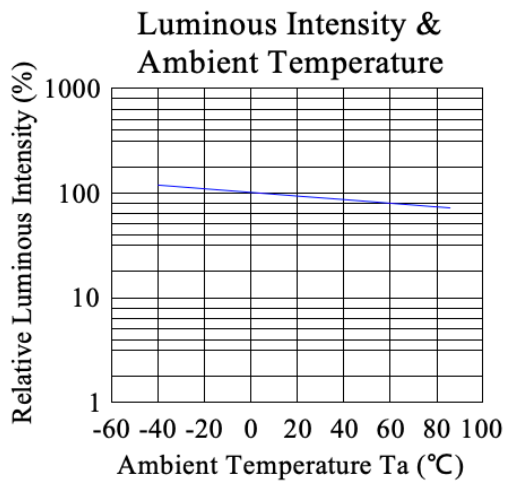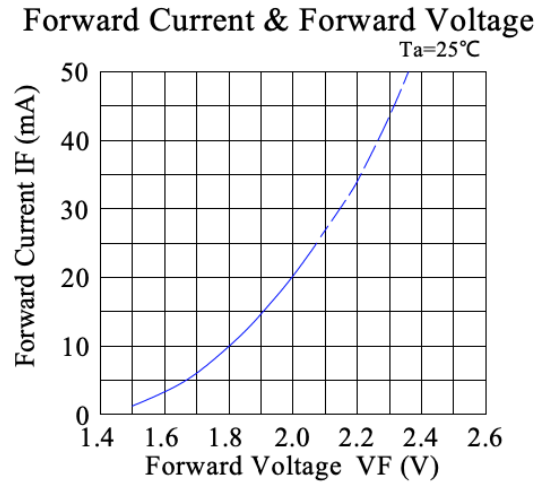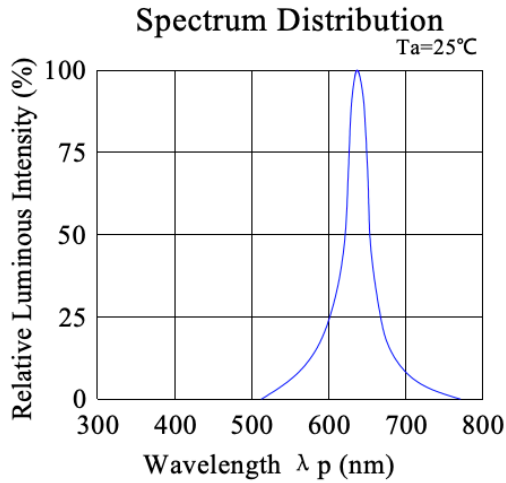






Characteristic Curves-Per Die Blue

(Ta = 25°C Unless Otherwise Noted)

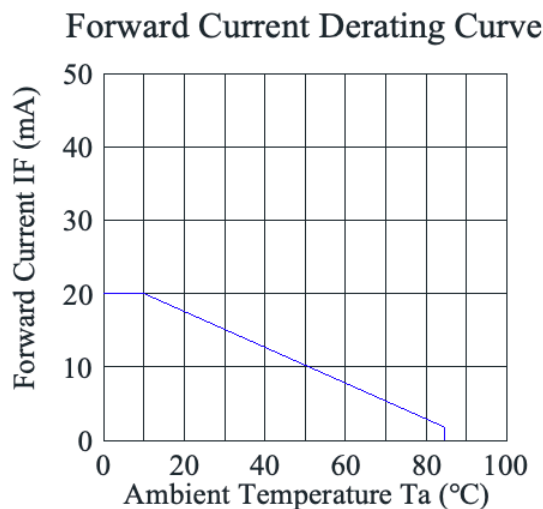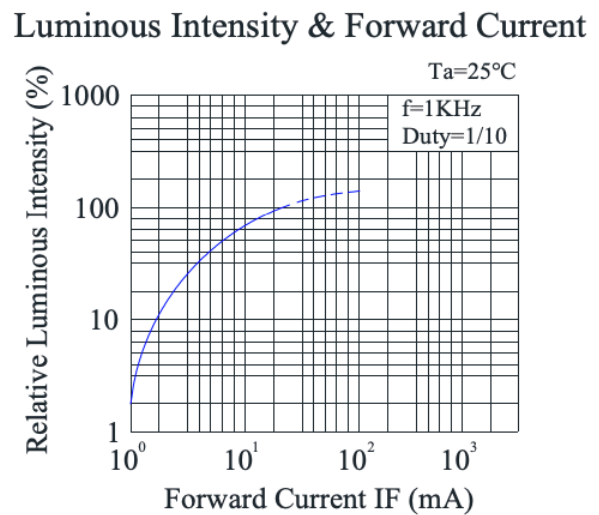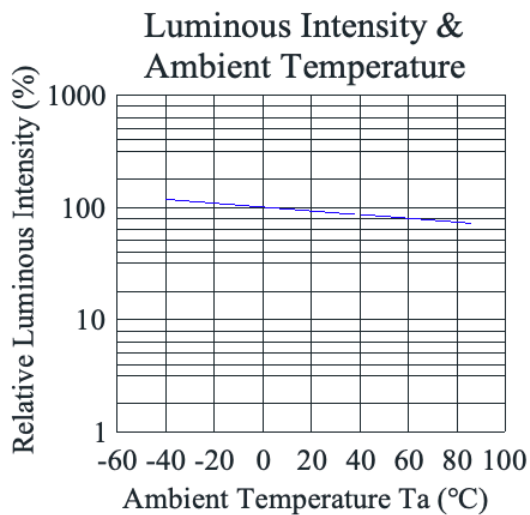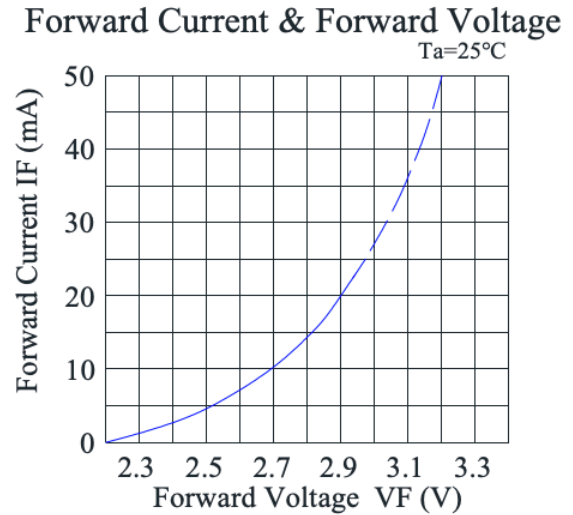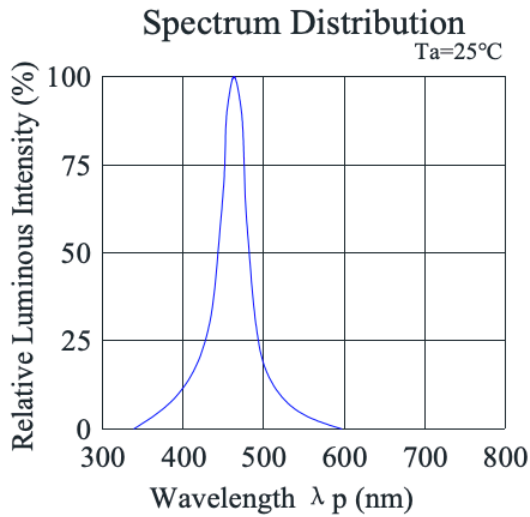

Characteristic Curves-Per Die White


(Ta = 25°C Unless Otherwise Noted)

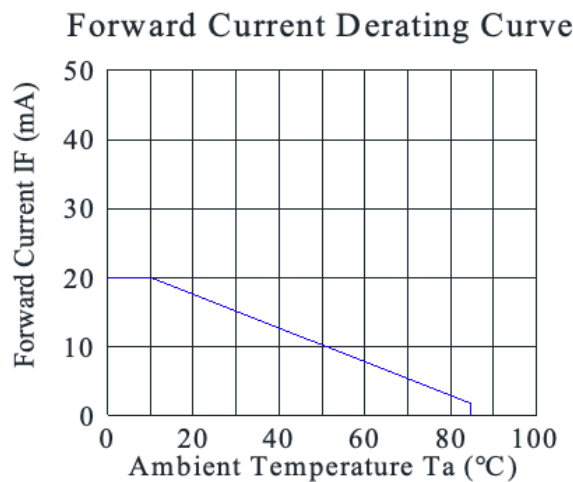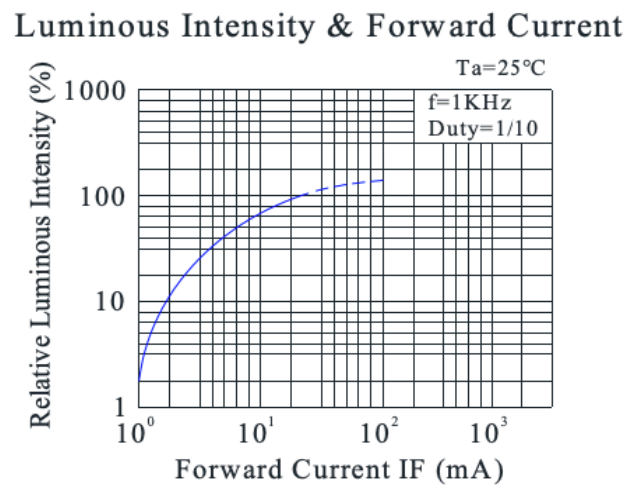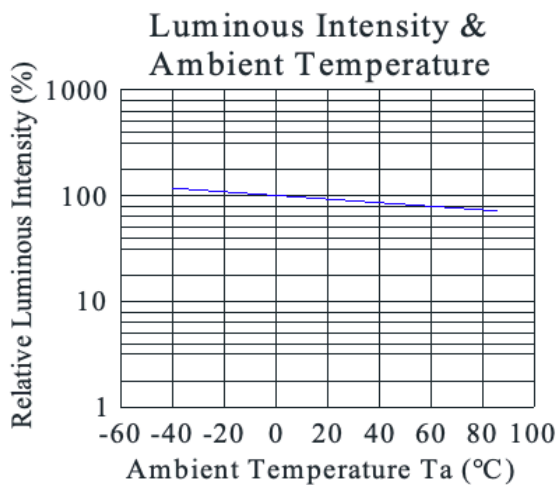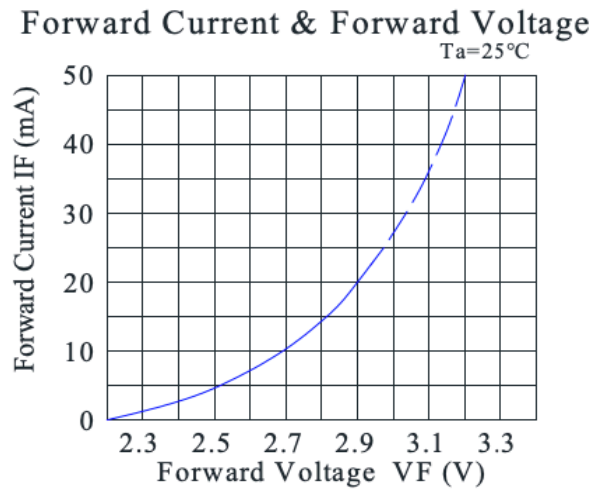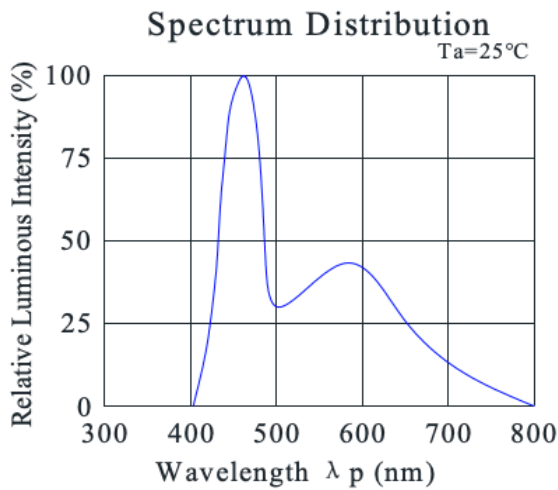

Chromaticity Bin (for White only)
Color Bin at IF = 10mA

Bin Code	CIE 1931 Chromaticity Coordinates					
	x	y	x	y	x	y
W1	x	0.284	0.284	0.304	0.304	
	y	0.278	0.311	0.332	0.298	
W2	x	0.304	0.304	0.324	0.324	
	y	0.268	0.298	0.322	0.292	
W3	x	0.304	0.304	0.324	0.324	
	y	0.298	0.332	0.352	0.322	


Tolerance on each Hue (x, y) bin is +/- 0.01.

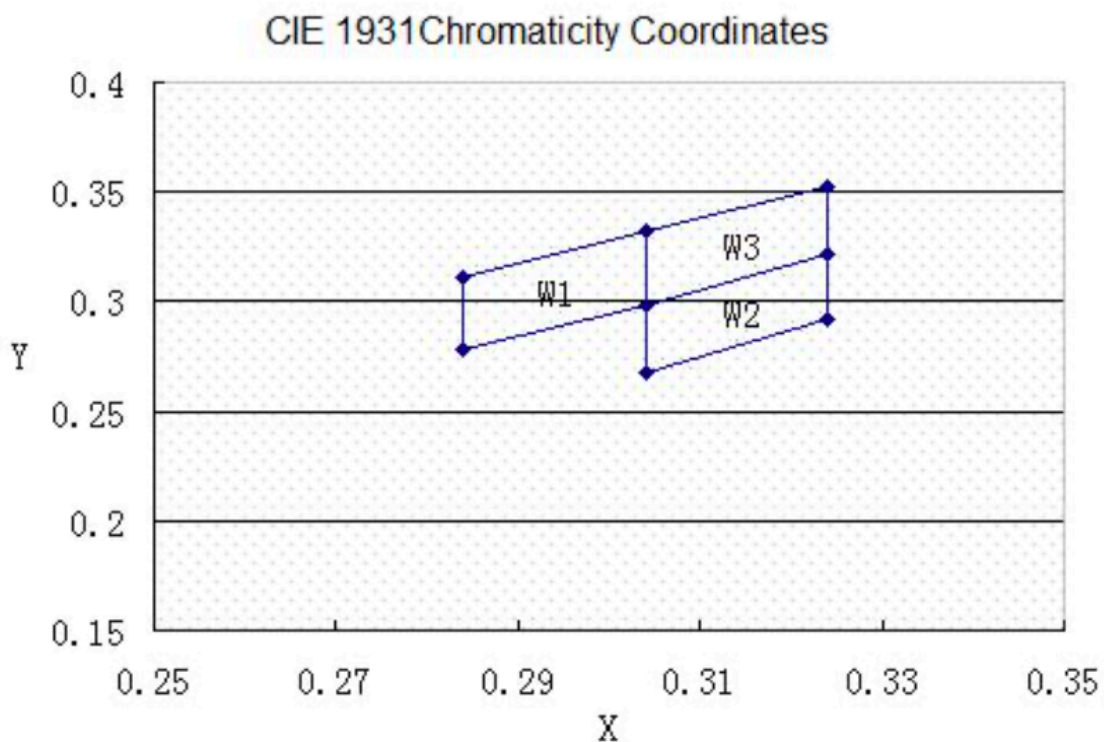

Ordering Information

Product	Emission Color	I*V(mcd) @10mA	I*V(mcd) @20mA	VF(V) @20mA	Polarity	Face Color	Orderable Part Number
INBD-T11020.YGNB	Yellow Green	10	20	2	No Common	Black	INBD-T11020.YGNB
INBD-T11020.ANB	Amber	25	50	2.1	No Common	Black	INBD-T11020.ANB
INBD-T11020.RNB	Red	40	80	2	No Common	Black	INBD-T11020.RNB
INBD-T11020.BNB	Blue	30	60	2.9	No Common	Black	INBD-T11020.BNB
INBD-T11020.WNB	White	75	150	2.9	No Common	Black	INBD-T11020.WNB

Label Specifications

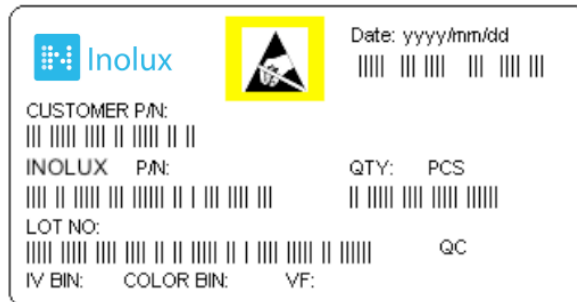


Inolux P/N:

I	N	B	D	-	T	1	1	0	2	0	.	X	N	B	-	X	X	X	X
Inolux		Display Type			Display Type	Matrix	Dimension		Color	Polarity	Face Color		Customized Stamp-off						
Inolux		BD = Bar Graph Display			T: Through Hole Type	110 = 1 x 10	20 = 0.20" Display Height		YG: 572nm A: 605nm R: 624nm B: 470 nm W: X: 0.3 Y: 0.31	N = No Common	B = Black								

Lot No.:

Z	2	0	1	7	01	24	001
Internal Tracker	Year (2017, 2018,)				Month	Date	Serial

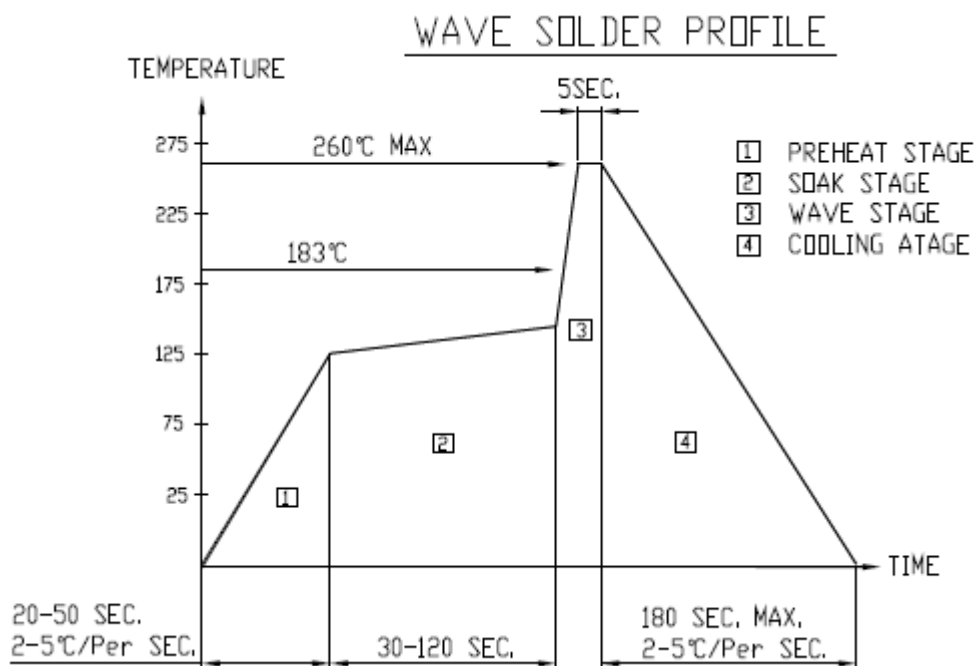Reflow Soldering

Soldering Iron

Basic Spec is ≤ 4 sec. when 260°C (+10°C → -1 second). Power dissipation of Iron should be less than 15W. Surface temperature should be under 230°C

Rework

Rework should be completed within 4 second under 245°C

Revision History

Changes since last revision	Page	Version No.	Revision Date
Initial Release		1.0	01-28-2021

DISCLAIMER

INOLUX reserves the right to make changes without further notice to any products herein to improve reliability, function or design. INOLUX does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

LIFE SUPPORT POLICY

INOLUX's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of INOLUX or INOLUX CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View INBD-T11020.RNB on WIN SOURCE](#)
- ⊖ [Inolux Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management