



THE DATASHEET OF H22LTB



H22L Series OPTOLOGIC® OPTICAL INTERRUPTER SWITCH


Features

- Black plastic housing
- Choice of inverter or buffer output functions
- Choice of open-collector or totem-pole output configuration
- No contact switching
- TTL/CMOS compatible output functions

PART NUMBER DEFINITIONS


H22LTB	Totem-pole, buffer output
H22LTI	Totem-pole, inverter output
H22LOB	Open-collector, buffer output
H22LOI	Open-collector, inverter output

Package Dimensions

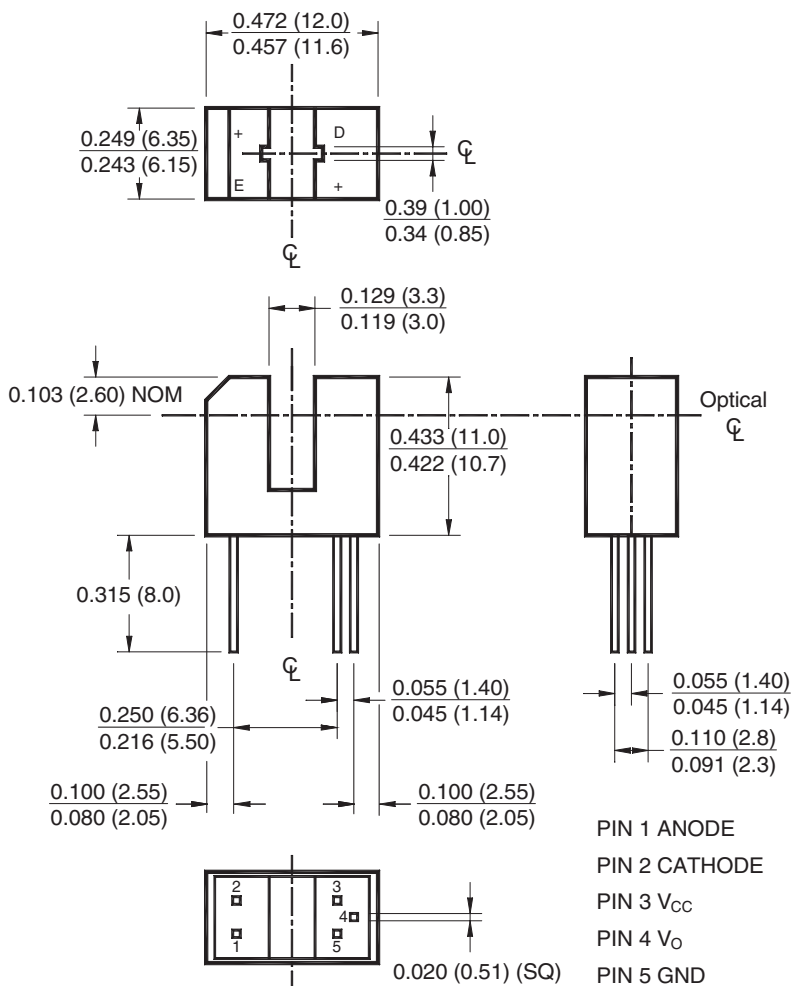

NOTES:

1. Dimensions for all drawings are in inches (millimeters).
2. Tolerance of $\pm .010$ (.25) on all non-nominal dimensions unless otherwise specified.
3. Lead cross section is controlled between .050 (1.27) from the seating plane and the end of the leads.



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ Unless otherwise specified)			
Parameter	Symbol	Rating	Units
Operating Temperature	T_{OPR}	-40 to +85	$^\circ\text{C}$
Storage Temperature	T_{STG}	-40 to +85	$^\circ\text{C}$
Soldering Temperature (Iron) ^(3,4,5,6)	T_{SOL-I}	240 for 5 sec	$^\circ\text{C}$
Soldering Temperature (Flow) ^(3,4,6)	T_{SOL-F}	260 for 10 sec	$^\circ\text{C}$
EMITTER			
Continuous Forward Current	I_F	50	mA
Reverse Voltage	V_R	5	V
Power Dissipation ⁽¹⁾	P_D	100	mW
SENSOR			
Continuous Forward Current	I_F	50	mA
Output Current	I_O	50	mA
Supply Voltage	V_{CC}	4.0 to 16	V
Output Voltage	V_O	30	V
Power Dissipation ⁽¹⁾	P_D	150	mW


ELECTRICAL / OPTICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)						
Part Number	Test Conditions	Symbol	Min.	Typ.	Max	Units
Operating Supply Voltage	V_{CC}	V_{CC}	4.5		16	V
INPUT DIODE						
Forward Voltage	$I_F = 20\text{ mA}$	V_F	—		1.7	V
Reverse Leakage Current	$V_R = 5\text{ V}$	I_R	—		10	μA
COUPLED						
Operating Supply Current	$I_F = 15\text{ mA}$ or 0 mA , $V_{CC} = 16\text{ V}$	I_{CC}	—		5	mA
Low Level Output Voltage H22LTB, H22LOB	$I_F = 0\text{ mA}$, $V_{CC} = 5\text{ V}$, $R_L = 100\ \Omega$	V_{OL}	—		0.4	V
Low Level Output Voltage H22LTI, H22LOI	$I_F = 15\text{ mA}$, $V_{CC} = 5\text{ V}$, $R_L = 360\ \Omega$	V_{OL}	—		0.4	V
High Level Output Voltage H22LTB	$I_F = 15\text{ mA}$, $V_{CC} = 5\text{ V}$, $I_{OH} = -800\ \mu\text{A}$	V_{OH}	2.4		—	V
High Level Output Voltage H22LTI	$I_F = 0\text{ mA}$, $V_{CC} = 5\text{ V}$, $I_{OH} = -800\ \mu\text{A}$	V_{OH}	2.4		—	V
High Level Output Current H22LOB	$I_F = 0\text{ mA}$, $V_{CC} = 5\text{ V}$, $I_{OH} = -800\ \mu\text{A}$	I_{OH}			100	μA
High Level Output Current H22LOI	$I_F = 0\text{ mA}$, $V_{CC} = 5\text{ V}$, $V_{OH} = 30\text{ V}$	I_{OH}	—		100	μA
Turn on Threshold Current	$V_{CC} = 5\text{ V}$, $R_L = 360\ \Omega$	$I_{F(+)}$	—		15	mA
Turn off Threshold Current	$V_{CC} = 5\text{ V}$, $R_L = 360\ \Omega$	$I_{F(-)}$	0.50		—	mA
Hysteresis Ratio		$I_{F(+)} / I_{F(-)}$		1.3		
Propagation Delay	$V_{CC} = 5\text{ V}$, $R_L = 360\ \Omega$	t_{PLH} , t_{PHL}		5		μs
Output Rise and Fall Time	$V_{CC} = 5\text{ V}$, $R_L = 360\ \Omega$	t_r , t_f		70		ns

NOTES (Applies to Max Ratings and Characteristics Tables.):


1. Derate power dissipation linearly 1.67 mW/°C above 25°C.
2. Derate power dissipation linearly 2.50 mW/°C above 25°C.
3. RMA flux is recommended.
4. Methanol or isopropyl alcohols are recommended as cleaning agents.
5. Soldering iron 1/16" (1.6mm) from housing.
6. As long as leads are not under any stress or spring tension.

INPUT / OUTPUT TABLE		
Part Number	LED	Output
H22LTB	On	High
H22LTB	Off	Low
H22LTI	On	Low
H22LTI	Off	High
H22LOB	On	High
H22LOB	Off	Low
H22LOI	On	Low
H22LOI	Off	High


Circuit Schematics

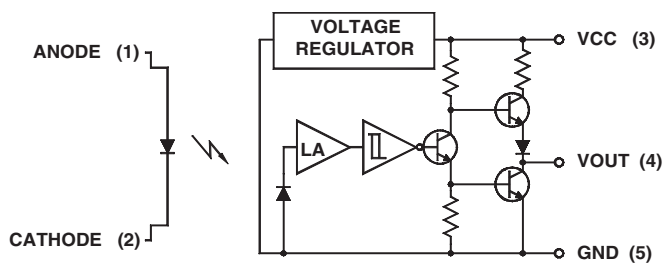


H22LTB
Totem-Pole Output Buffer

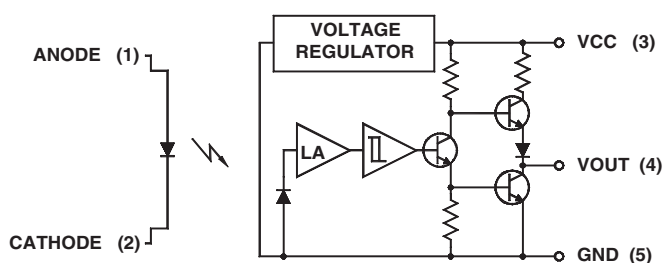

H22LTI
Totem-Pole Output inverter

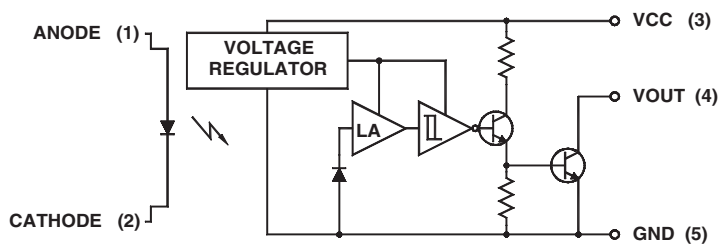


H22LOB
Open-Collector Output Buffer

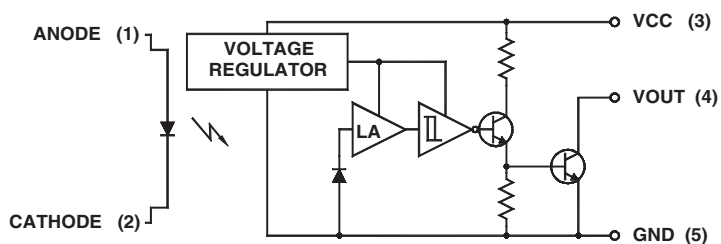

H22LOI
Open-Collector Output Inverter


Circuit Schematics (Continued)

Switching Speed Test Circuit

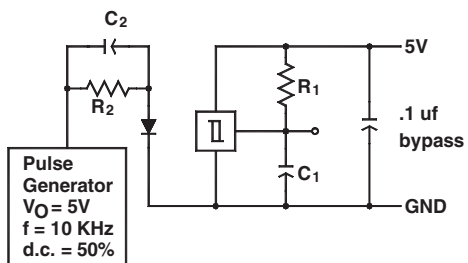


$R_1 = 180 \Omega$ $C_1 = 15 \text{ pf}$ C_1 and C_2 include probe and
 $R_2 = 360 \Omega$ $C_2 = 20 \text{ pf}$ stray wire capacitance


Typical Operating Circuit

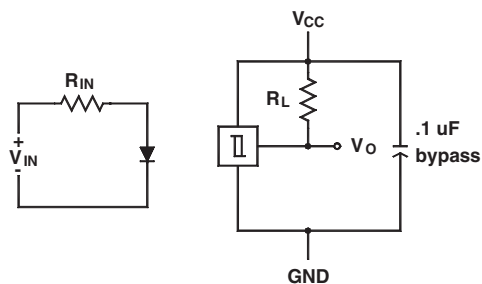

Switching Test Curve for Buffers

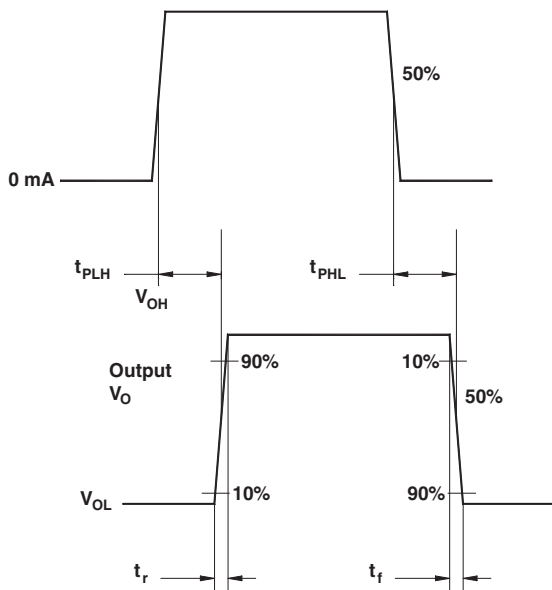

Switching Test Curve for Inverters

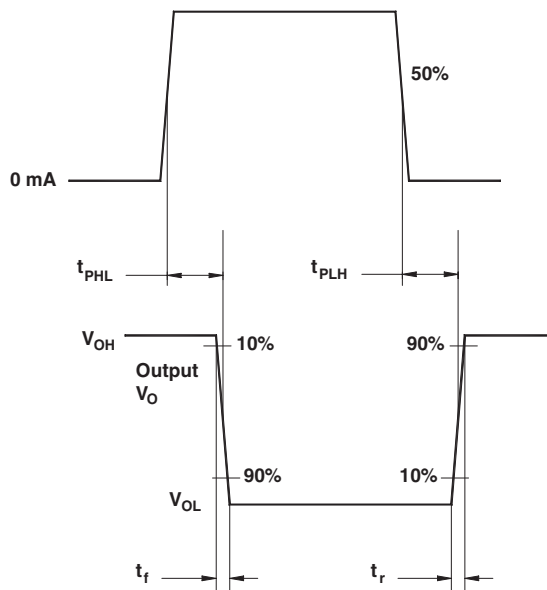

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACE ^x ™	FAST®	ISOPLANAR™	Power247™	Stealth™
ActiveArray™	FAST ^r ™	LittleFET™	POWEREDGE™	SuperFET™
Bottomless™	FPS™	MICROCOUPLER™	PowerSaver™	SuperSOT™-3
CoolFET™	FRFET™	MicroFET™	PowerTrench®	SuperSOT™-6
CROSSVOLT™	GlobalOptoisolator™	MicroPak™	QFET®	SuperSOT™-8
DOMET™	GTO™	MICROWIRE™	QS™	SyncFET™
EcoSPARK™	HiSeC™	MSX™	QT Optoelectronics™	TinyLogic®
E ² CMOS™	µC™	MSXPro™	Quiet Series™	TINYOPTO™
EnSigna™	i-Lo™	OCX™	RapidConfigure™	TruTranslation™
FACT™	ImpliedDisconnect™	OCXPro™	RapidConnect™	UHC™
FACT Quiet Series™		OPTOLOGIC®	µSerDes™	UltraFET®
Across the board. Around the world.™		OPTOPLANAR™	SILENT SWITCHER®	VCX™
The Power Franchise®		PACMAN™	SMART START™	
Programmable Active Droop™		POP™	SPM™	

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- | | |
|---|---|
| <p>1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.</p> | <p>2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.</p> |
|---|---|

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

Rev. I12

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View H22LTB on WIN SOURCE](#)
- ⊖ [Fairchild/ON Semiconductor Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management