THE DATASHEET OF

HDSP-4850

www.win-source.net 0086-755-83957316

HDSP-4830/4840/4850, HDSP-4832/4836 & HLCP-J100

10-Element Bar Graph Array

Data Sheet

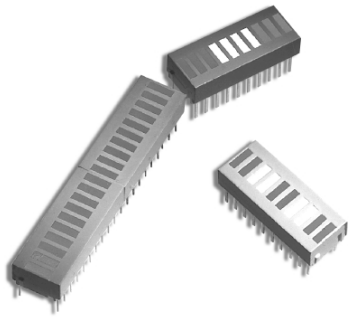

Description

These 10-element LED arrays are designed to display information in easily recognizable bar graph form. The packages are end stackable and therefore capable of displaying long strings of information. Use of these bar graph arrays eliminates the alignment, intensity, and color matching problems associated with discrete LEDs. The HDSP-4830/4840/4850 and HLCPJ100 each contain LEDs of one color. The HDSP-4832/4836 are multicolor arrays with High Efficiency Red, Yellow, and High Performance Green LEDs in a single package.

Applications

- Industrial Controls
- Instrumentation
- Office Equipment
- Computer Peripherals
- Consumer Products

Features

- Custom Multicolor Array Capability
- Matched LEDs for Uniform Appearance
- End Stackable
- Package Interlock Ensures Correct Alignment
- Low Profile Package
- Rugged Construction
- Large, Easily Recognizable Segments
- High ON-OFF Contrast, Segment to Segment
- Wide Viewing Angle
- Categorized for Luminous Intensity
- HDSP-4832/4836/4840/4850 Categorized for Dominant Wavelength
- HLCP-J100 Operates at Low Current
  Typical Intensity of 1.0 mcd at 1 mA Drive Current

Package Dimensions

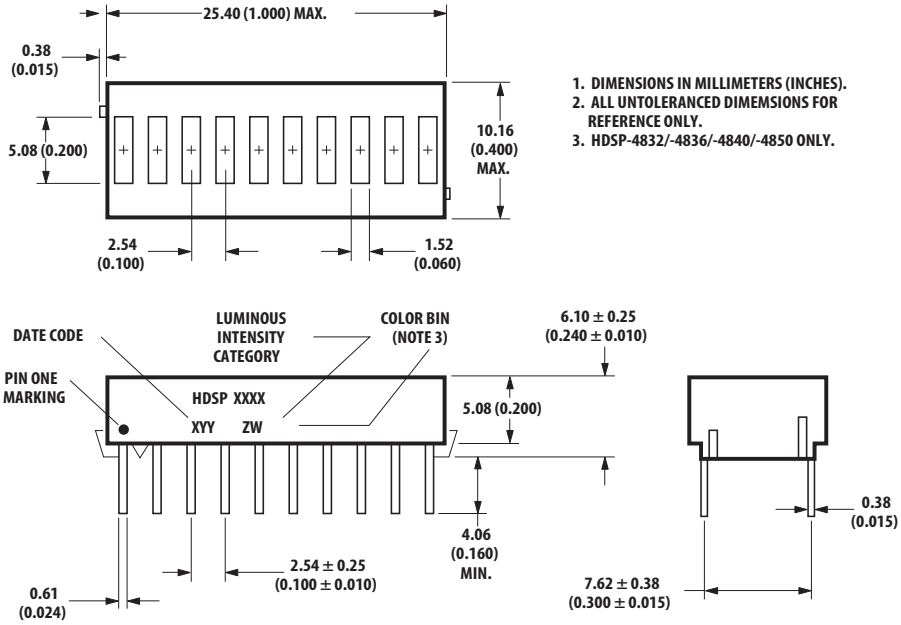

Absolute Maximum Ratings [1]

Parameter	AlGaAs Red HLCP-J100	HER HDSP-4830	Yellow HDSP-4840	Green HDSP-4850
Average PowerDissipation per LED (T_A = 25°C)	37 mW	87 mW	50 mW	105 mW
Peak Forward Current per LED	45 mA[3]	90 mA[4]	60 mA[4]	90 mA[4]
DC Forward Current per LED	15 mA[5]	30 mA[6]	20 mA[6]	30 mA[6]
Operating Temperature Range	-20°C to +100°C	-40°C to +85°C		-20°C to +85°C
Storage Temperature Range	-55°C to +100°C	-40°C to +85°C		
Reverse Voltage per LED	5.0 V	3.0 V		
Lead Solder Dipping Temperature (1.59 mm (1/16 inch) below seating plane) [7]	260°C for 5 seconds [8]			
Wave Soldering Temperature (at 2 mm distance from the body)	250°C for 3 seconds			

Notes:
1. Absolute maximum ratings for HER, Yellow, and Green elements of the multicolor arrays are identical to the HDSP-4830/4840/4850 maximum ratings.
2. See Figure 1 to establish pulsed operating conditions. Maximum pulse width is 1.5 ms.
3. See Figure 2 to establish pulsed operating conditions. Maximum pulse width is 1.5 ms.
4. See Figure 8 to establish pulsed operating conditions. Maximum pulse width is 2 ms.
5. Derate maximum DC current for Red above T_A = 62°C at 0.79 mA/°C, and AlGaAs Red above T_A = 91°C at 0.8 mA/°C. See Figure 3.
6. Derate maximum DC current for HER above T_A = 48°C at 0.58 mA/ °C, Yellow above T_A = 70°C at 0.66 mA/°C, and Green above T_A = 37°C at 0.48 mA/°C. See Figure 9.
7. Clean only in water, isopropanol, ethanol, Freon TF or TE (or equivalent), or Genesolve DI-15 (or equivalent).
8. Maximum tolerable component side temperature is 134°C during solder process.

Internal Circuit Diagram

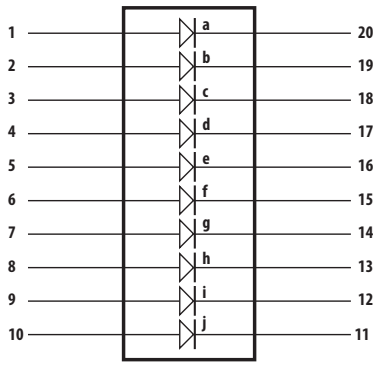

Pin	Function	Pin	Function
1	Anode a	11	Cathode j
2	Anode b	12	Cathode I
3	Anode c	13	Cathode h
4	Anode d	14	Cathode g
5	Anode e	15	Cathode f
6	Anode f	16	Cathode e
7	Anode g	17	Cathode d
8	Anode h	18	Cathode c
9	Anode i	19	Cathode b
10	Anode j	20	Cathode a

Multicolor Array Segment Colors

Segment	HDSP-4832 Segment Color	HDSP-4836 Segment Color
a	HER	HER
b	HER	HER
c	HER	Yellow
d	Yellow	Yellow
e	Yellow	Green
f	Yellow	Green
g	Yellow	Yellow
h	Green	Yellow
i	Green	HER
j	Green	HER

Electrical/Optical Characteristics at $T_A = 25°C$[4]

AlGaAs Red HLCP-J100

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Luminous Intensity per LED (Unit Average) [1]	I_V	600	1000		µcd	$I_F = 1$ mA
			5200			$I_F = 20$ mA Pk; 1 of 4 Duty Factor
Peak Wavelength	λ_{PEAK}		645		nm	
Dominant Wavelength[2]	λ_d		637		nm	
Forward Voltage per LED	V_F		1.6		V	$I_F = 1$ mA
			1.8	2.2		$I_F = 20$ mA
Reverse Voltage per LED[5]	V_R	5	1.5		V	$I_R = 100$ µA
Temperature Coefficient V_F per LED	ΔV_F/°C		-2.0		mV/°C	
Thermal Resistance LED Junction-to-Pin	$R\theta_{J\text{-}PIN}$		300		°C/W/LED	

High Efficiency Red HDSP-4830

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Luminous Intensity per LED (Unit Average)[1,4]	I_V	900	3500		µcd	$I_F = 10$ mA
Peak Wavelength	λ_{PEAK}		635		nm	
Dominant Wavelength[2]	λ_d		626		nm	
Forward Voltage per LED	V_F		2.1	2.5	V	$I_F = 20$ mA
Reverse Voltage per LED[5]	V_R	3	30		V	$I_R = 100$ µA
Temperature Coefficient V_F per LED	ΔV_F /°C		-2.0		mV/°C	
Thermal Resistance LED Junction-to-Pin	$R\theta_{J\text{-}PIN}$		300		°C/W/LED	

Yellow HDSP-4840

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Luminous Intensity per LED (Unit Average)[1,4]	I_V	600	1900		µcd	$I_F = 10$ mA
Peak Wavelength	λ_{PEAK}		583		nm	
Dominant Wavelength[2,3]	λ_d	581	585	592	nm	
Forward Voltage per LED	V_F		2.2	2.5	V	$I_F = 20$ mA
Reverse Voltage per LED[5]	V_R	3	40		V	$I_R = 100$ µA
Temperature Coefficient V_F per LED	ΔV_F/°C		-2.0		mV/°C	
Thermal Resistance LED Junction-to-Pin	$R\theta_{J\text{-}PIN}$		300		°C/W/LED	

Green HDSP-4850

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Luminous Intensity per LED (Unit Average)[1,4]	I_V	600	1900		µcd	$I_F = 10$ mA
Peak Wavelength	λ_{PEAK}		566		nm	
Dominant Wavelength[2,3]	λ_d		571	577	nm	
Forward Voltage per LED	V_F		2.1	2.5	V	$I_F = 20$ mA
Reverse Voltage per LED[5]	V_R	3	50		V	$I_R = 100$ µA
Temperature Coefficient V_F per LED	ΔV_F/°C		-2.0		mV/°C	
Thermal Resistance LED Junction-to-Pin	$R\theta_{J\text{-}PIN}$		300		°C/W/LED	

Notes:
1. The bar graph arrays are categorized for luminous intensity. The category is designated by a letter located on the side of the package.
2. The dominant wavelength, λd, is derived from the CIE chromaticity diagram and is that single wavelength which defines the color of the device.
3. The HDSP-4832/-4836/-4840/-4850 bar graph arrays are categorized by dominant wavelength with the category designated by a number adjacent to the intensity category letter. Only the yellow elements of the HDSP-4832/-4836 are categorized for color.
4. Electrical/optical characteristics of the High-Efficiency Red elements of the HDSP-4832/-4836 are identical to the HDSP-4830 characteristics. Characteristics of Yellow elements of the HDSP-4832/-4836 are identical to the HDSP-4840. Characteristics of Green elements of the HDSP-4832/-4836 are identical to the HDSP-4850.
5. Reverse voltage per LED should be limited to 3.0 V max. for the HDSP-4830/-4840/-4850/-4832/-4836 and 5.0 V max. for the HLCP-J100.

Red, AlGaAs Red

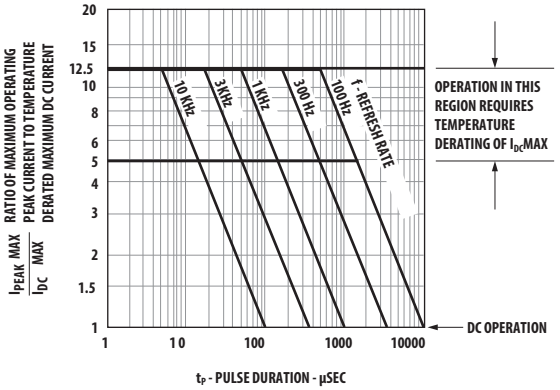

Figure 1. Maximum Tolerable Peak Current vs. Pulse Duration – Red.

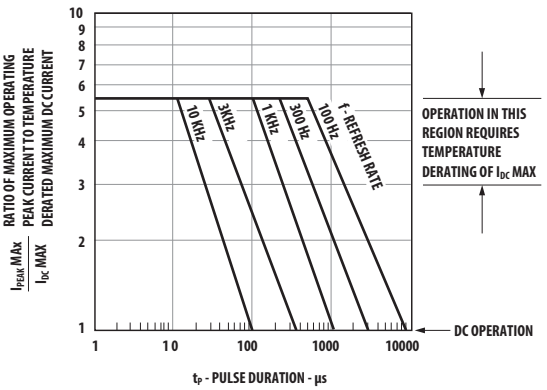

Figure 2. Maximum Tolerable Peak Current vs. Pulse Duration – AlGaAs Red.

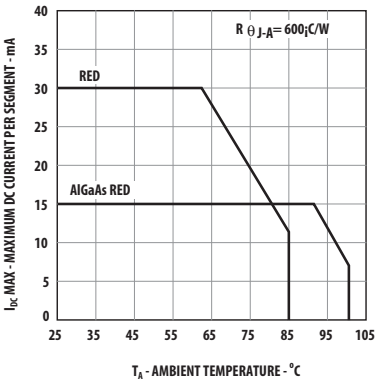

Figure 3. Maximum Allowable DC Current vs. Ambient Temperature.
T_{JMAX} = 100°C for Red and T_{JMAX} = 110°C for AlGaAs Red.

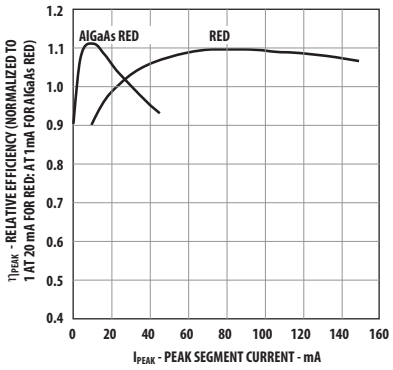

Figure 4. Relative Efficiency (Luminous Intensity per Unit Current) vs. Peak Current.

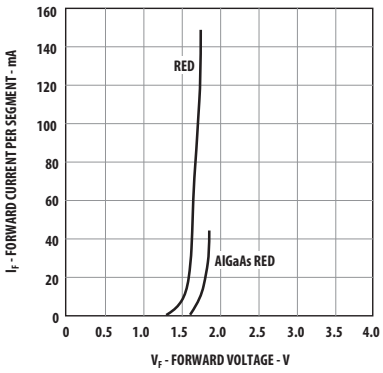

Figure 5. Forward Current vs. Forward Voltage.

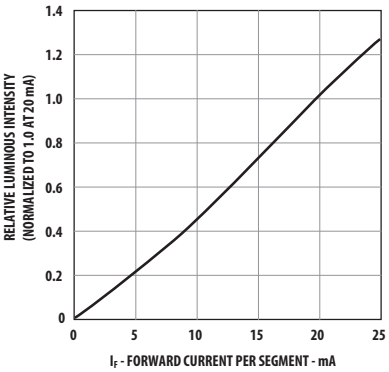

Figure 6. Relative Luminous Intensity vs. DC Forward Current – Red.

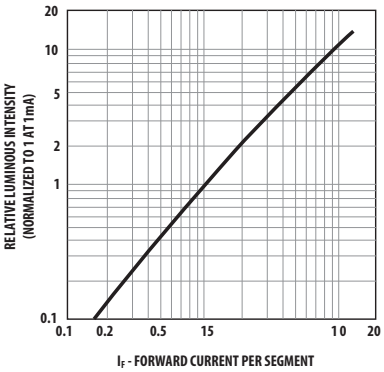

Figure 7. Relative Luminous Intensity vs. DC Forward Current – AlGaAs.

For a Detailed Explanation on the Use of Data Sheet Information and Recommended Soldering Procedures, See Application Note 1005.

HER, Yellow, Green

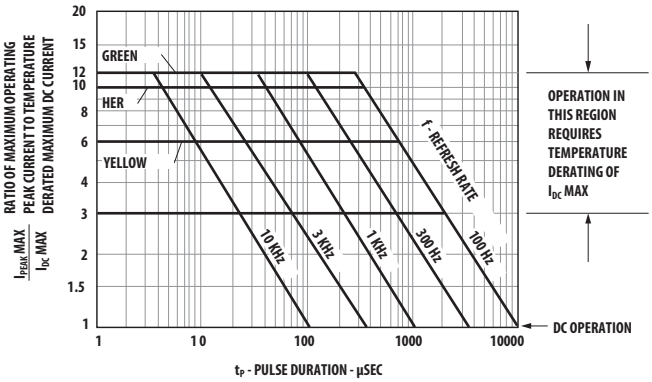

Figure 8. Maximum Tolerable Peak Current vs. Pulse Duration –

HER/Yellow/Green.

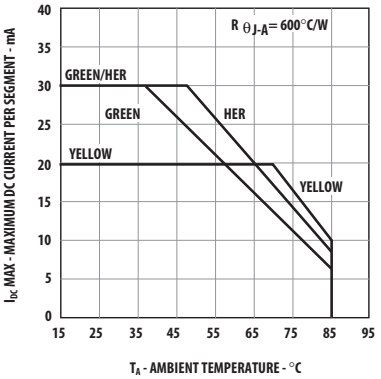

Figure 9. Maximum Allowable DC Current vs. Ambient Temperature. TJMAX = 100°C.

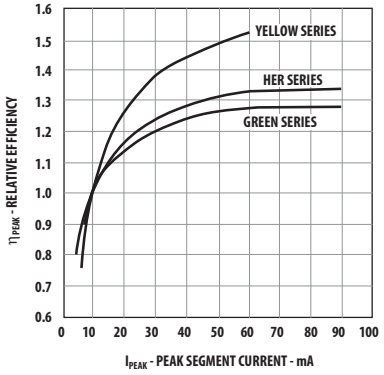

Figure 10. Relative Efficiency (Luminous Intensity per Unit Current) vs. Peak Current.

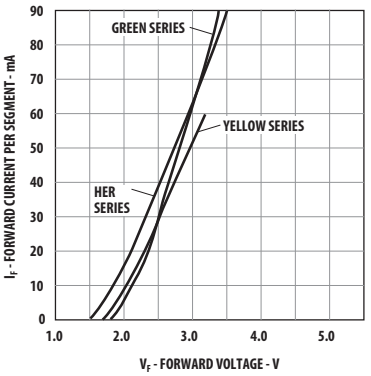

Figure 11. Forward Current vs. Forward Voltage.

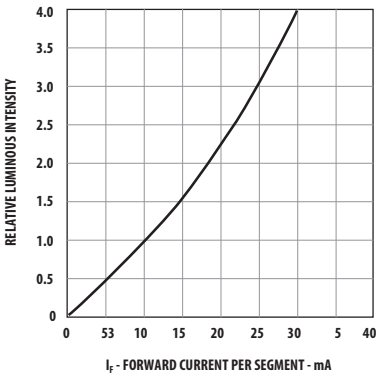

Figure 12. Relative Luminous Intensity vs. DC Forward Current.

For a Detailed Explanation on the Use of Data Sheet Information and Recommended Soldering Procedures, See Application Note 1005.

Electrical/Optical

These versatile bar graph arrays are composed of ten light emitting diodes. The light from each LED is optically stretched to form individual elements. The AlGaAs Red (HLCP-J100) bar graph array LEDs use double heterojunction AlGaAs on a GaAs substrate. HER (HDSP-4830) and Yellow (HDSP-4840) bar graph array LEDs use a GaAsP epitaxial layer on a GaP substrate. Green (HDSP-4850) bar graph array LEDs use liquid phase GaP epitaxial layer on a GaP substrate. The multicolor bar graph arrays (HDSP-4832/4836) have HER, Yellow, and Green LEDs in one package. These displays are designed for strobed operation. The typical forward voltage values can be scaled from Figures 5 and 11. These values should be used to calculate the current limiting resistor value and typical power consumption. Expected maximum V_F values for driver circuit design and maximum power dissipation may be calculated using the V_{FMAX} models:

AlGaAs Red HLCP-J100 series
$V_F MAX = 1.8\ V + I_{Peak}\ (20\ \Omega)$
For: $I_{Peak} \leq 20$ mA
$V_F MAX = 2.0\ V + I_{Peak}\ (10\ \Omega)$
For: $I_{Peak} \geq 20$ mA

HER (HDSP-4830) and Yellow (HDSP-4840) series
$V_F MAX = 1.6 + I_{Peak}\ (45\ \Omega)$
For: $5\ mA \leq I_{Peak} \leq 20$ mA
$V_F MAX = 1.75 + I_{Peak}\ (38\ \Omega)$
For: $I_{Peak} \geq 20$ mA

Green (HDSP-4850) series
$V_F MAX = 2.0 + I_{Peak}\ (50\ \Omega)$
For: $I_{Peak} > 5$ mA

Figures 4 and 10 allow the designer to calculate the luminous intensity at different peak and average currents. The following equation calculates intensity at different peak and average currents:

$I_V AVG = (I_F AVG / I_F AVG\ DATA\ SHEET)\eta_{peak})(I_V DATA\ SHEET)$

Where:

$I_V AVG$ is the calculated time averaged luminous intensity resulting from $I_F AVG$.

$I_F AVG$ is the desired time averaged LED current.

$I_F AVG$ DATA SHEET is the data sheet test current for $I_V DATA\ SHEET$.

η_{peak} is the relative efficiency at the peak current, scaled from Figure 4 or 10.

I_V DATA SHEET is the data sheet luminous intensity, resulting from $I_F AVG$ DATA SHEET.

For example, what is the luminous intensity of an HDSP-4830 driven at 50 mA peak 1/5 duty factor?

$I_F AVG = (50\ mA)\ (0.2) = 10\ mA$

$I_F AVG$ DATA SHEET = 10 mA

$\eta_{peak} = 1.3$

I_V DATA SHEET = 3500 μcd

Therefore

$I_V AVG = (10\ mA/10\ mA)\ (1.3)\ (3500\ mcd) = 4550\ mcd$

For product information and a complete list of distributors, please go to our web site: **www.avagotech.com**

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries.
Data subject to change. Copyright © 2005-2015 Avago Technologies. All rights reserved. Obsoletes AV01-0277EN
AV02-1798EN - April 16, 2015

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View HDSP-4850 on WIN SOURCE
- Broadcom Limited Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management