
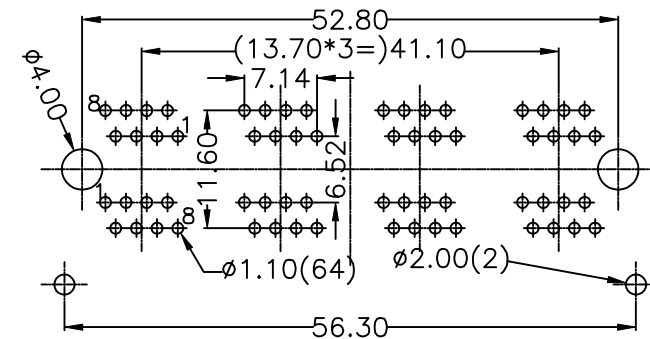
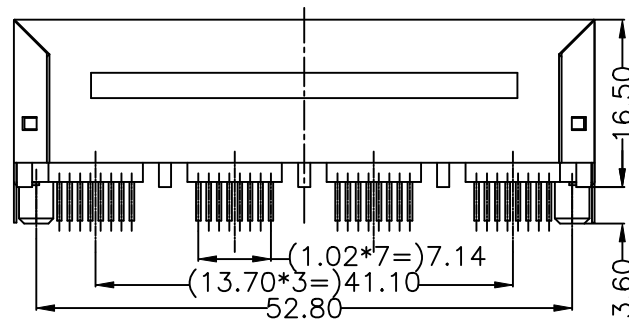
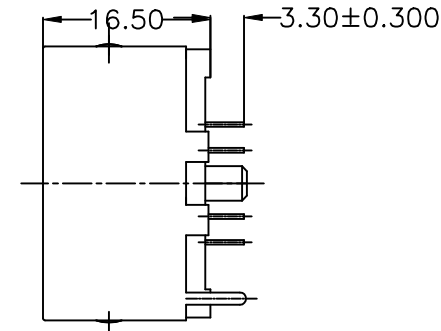


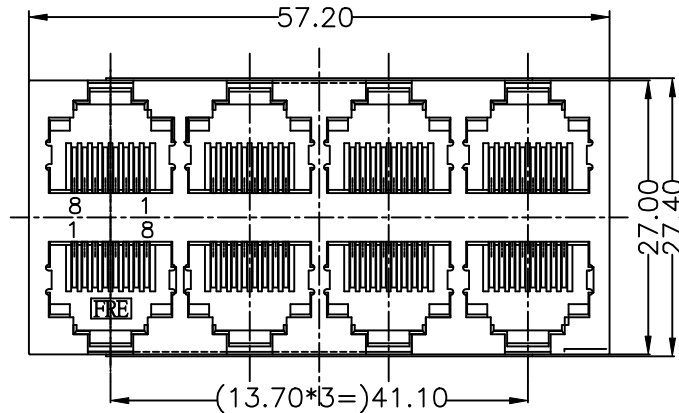

THE DATASHEET OF E5288-YCCB02-L

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		NOTES MODIFY	Among	10/22/04

**NOTES:****ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT+30%
2. CONTACT MATERIAL : PHOSPHOR BRONZE ϕ .46mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
 2. OPERATION: -40°C TO +85°C.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

PART NUMBER: E5288-YXCBOX

1- 3U" 2- 6U"
3- 15U" 4- 30U"
5- 50U"
N- W/O LOGO
C- W/ FRE LOGO

DETACHED LISTS	MM (INCH)	DFTO CZH	DATE 1/31/02'	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD MFO	DATE 10/11/17		
	MM	MFO	DATE		
	.0 ±0.20 .00 ±0.15 .000 ±0.075	APPLY LUBES	DATE 10/11/17		
ANGLES ±	±	MATERIAL :	DATE	TITLE	
THIRD ANGLE PROJECTION	±	QT'Y :	DATE	2X4 TOP ENTRY PCB JACK	
		FINISH :	DATE	DRAWING NO. GE523013	
		SCALE : 2:1	DATE	/PART NO. SEE NOTE	
			DATE	DO NOT SCALE DRAWING	
			DATE	SHEET X OF Y	

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View E5288-YCCB02-L on WIN SOURCE](#)

 [Pulse](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management