



**THE DATASHEET OF
LHA-23HLN+**





ULTRA HIGH DYNAMIC RANGE


Monolithic Amplifier

LHA-23HLN+

50Ω 30 MHz to 2 GHz

THE BIG DEAL

- Ultra-High IP3, +44.7 dBm Typ.
- Gain, 21.5 dB Typ. at 1 GHz
- Medium Power, +28.3 dBm Typ.
- Excellent Noise Figure, 1.3 dB Typ.



Generic photo used for illustration purposes only

CASE STYLE: DQ1225

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

APPLICATIONS

- Base Station Infrastructure
- CATV
- Cellular

PRODUCT OVERVIEW

LHA-23HLN+ (RoHS compliant) is an advanced wideband amplifier fabricated using E-pHEMT technology and offers extremely high dynamic range over a broad frequency range, along with low noise figure. In addition, the LHA-23HLN+ has good input and output return loss over a broad frequency range. LHA-23HLN+ is enclosed in a 3x3 mm 12-lead QFN-style package and has very good thermal performance.

KEY FEATURES

Feature	Advantages
Broadband: 30 MHz to 2 GHz	Covers primary wireless communications bands: VHF, UHF, and Cellular.
Extremely High IP3 +43.8 dBm Typical at 0.5 GHz +44.7 dBm Typical at 1 GHz	The LHA-23HLN+ matches industry leading IP3 performance relative to device size and power consumption. The combination of the design and E-pHEMT structure provides enhanced linearity over a broad frequency range, as shown by the IP3 being approximately 11-17 dB above the P1dB point. This feature makes this amplifier ideal for use in: <ul style="list-style-type: none"> • Driver amplifiers for complex waveform upconverter paths • Drivers in linearized transmit systems • Secondary amplifiers in ultra-high dynamic range receivers
Low Noise Figure, 1.3 dB at 1 GHz	Low system noise figure performance along with high OIP3 provides high dynamic range.
High P1dB, +28.3 dBm at 1 GHz	High P1dB, High OIP3, and low NF results in very high dynamic range, preventing amplifier saturation under strong interfering signals.

REV. B
ECO-026525
LHA-23HLN+
MCL NY
250812





ULTRA HIGH DYNAMIC RANGE

Monolithic Amplifier

LHA-23HLN+

50Ω 30 MHz to 2 GHz

ELECTRICAL SPECIFICATIONS¹ AT +25°C, 50Ω, UNLESS NOTED OTHERWISE

Parameter	Condition (GHz)	V _{DD} = +8 V ¹			Units
		Min.	Typ.	Max.	
Frequency Range		30		2000	MHz
Gain	30		23.2		dB
	500		22.1		
	1000	19.2	21.5	23.5	
	1500	18.5	20.9	22.6	
	2000		20.2		
Input Return Loss	30		12		dB
	500		11		
	1000		10		
	1500		10		
	2000		11		
Output Return Loss	30		14		dB
	500		13		
	1000		14		
	1500		12		
	2000		10		
Reverse Isolation	1000		27.2		dB
Output Power @ 1 dB Compression	30		+26.0		dBm
	500		+28.3		
	1000		+28.3		
	1500		+28.0		
	2000		+27.9		
Output IP3 ²	30		+41.1		dBm
	500		+43.8		
	1000		+44.7		
	1500		+45.6		
	2000		+45.2		
Noise Figure	30		1.3		dB
	500		1.2		
	1000		1.3		
	1500		1.5		
	2000		1.7		
Device Operating Voltage			+8		V
Device Operating Current			244	273	mA
Device Current Variation vs. Temperature ³			-241		μA/°C
Device Current Variation vs. Voltage			0.0286		mA/mV
Thermal Resistance, Junction-to-Ground Lead Junction-to-Ground Lead at +85°C Stage Temperature			23.3		°C/W

1. Measured on Mini-Circuits Characterization test board TB-1061-23HLN+. See Characterization Test Circuit (Fig. 1).

2. Tested at P_{OUT} = 0 dBm/tone.

3. (Current at +95°C - Current at -45°C)/140

ABSOLUTE MAXIMUM RATINGS⁴

Parameter	Ratings
Operating Temperature (Ground Lead)	-45°C to +95°C
Storage Temperature	-65°C to +150°C
Power Dissipation ⁵	3.3 W
Input Power (CW)	+22 dBm (5 minutes max.) ⁶ +11 dBm (continuous) for 0.03-1 GHz +18 dBm (continuous) for 1-2 GHz
DC Voltage on Pin 7	+10 V

4. Permanent damage may occur if any of these limits are exceeded. Electrical maximum ratings are not intended for continuous normal operation.

5. Up to +85°C, derate linearly to 3 W at +95°C.

6. Up to +85°C, derate linearly to +19 dBm at +95°C.






ULTRA HIGH DYNAMIC RANGE

Monolithic Amplifier

LHA-23HLN+

50Ω 30 MHz to 2 GHz

SIMPLIFIED SCHEMATIC AND PAD DESCRIPTION

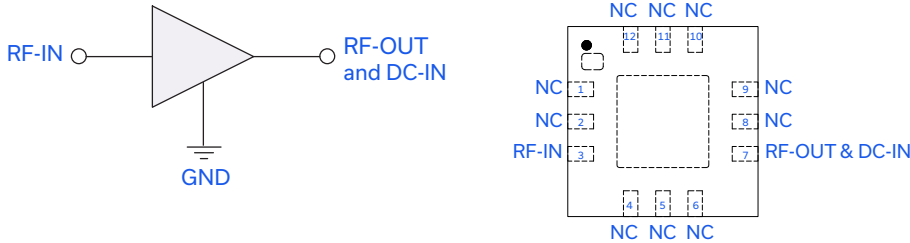

Function	Pad Number	Description
RF-IN	3	RF Input
RF-OUT and DC-IN	7	RF Output and DC Bias
GND	Paddle	Connections to ground
NC	1-2, 4-6, 8-12	No connection, grounded externally

CHARACTERIZATION TEST / RECOMMENDED APPLICATION CIRCUIT

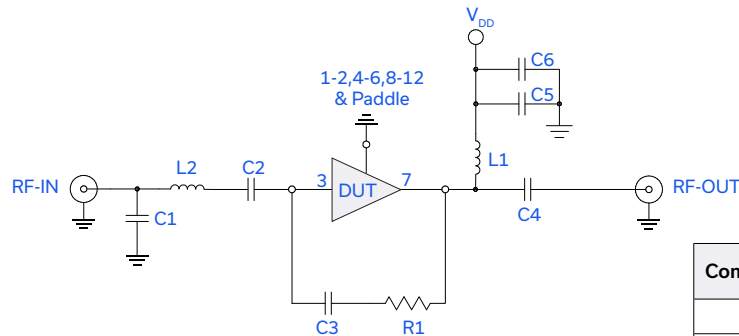



Fig 1. Block Diagram of Test Circuit used for characterization. (DUT soldered on Mini-Circuits Characterization test board TB-1061-23HLN+) Gain, Return Loss, Output Power at 1 dB Compression (P1dB), Output IP3 (OIP3) and Noise Figure measured using Agilent's N5242A PNA-X microwave network analyzer.

Conditions:

1. Gain and Return Loss: $P_{IN} = -25$ dBm
2. Output IP3 (OIP3): Two tones, spaced 1 MHz apart, 0 dBm/tone at output.

Components	Size	Value	Manufacturer	P/N
C1	0402	1.2pF	Murata	GRM1555C1H1R2WA01D
C2,C3,C6		0.1uF		GRM155R71C104KA88D
C4		0.001uF		GRM1555C1H102JA01D
C5		0.01uF		GRM155R71E103KA01D
R1		1.21KOhm		KOA
L1		0805	0.68uH	Coilcraft
L2	0402	1nH	0402CS-1N0XJLW	

PRODUCT MARKING

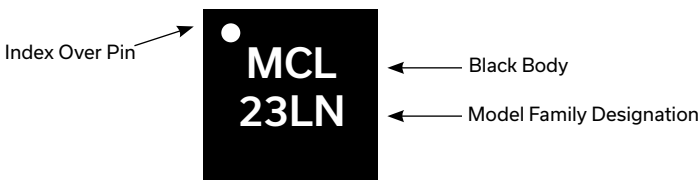

Marking may contain other features or characters for internal lot control.





ULTRA HIGH DYNAMIC RANGE

Monolithic Amplifier

LHA-23HLN+

50Ω 30 MHz to 2 GHz

ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASHBOARD. [CLICK HERE](#)

Performance Data	Data Table Swept Graphs
Case Style	DQ1225 Plastic package, exposed paddle Lead Finish: Matte-Tin
Tape & Reel Standard Quantities Available on Reel	F66 7" Reels with 20, 50, 100, 200, 500, 1000, 2000 or 3000 devices
Suggested Layout for PCB Design	PL-587
Evaluation Board	TB-1061-23HLN+
Environmental Ratings	ENV08T9

ESD RATING

Human Body Model (HBM): Class 1B (Pass 500 V) in accordance with ANSI/ESD STM 5.1 - 2001

MSL RATING

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View LHA-23HLN+ on WIN SOURCE](#)

 [Mini-Circuits Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management