

# POWER RELAY

## 2 POLES - 8A LOW PROFILE TYPE

### FTR-F1 R Series

RoHS Compliant



#### ■ FEATURES

- DPST/DPDT 8A
- Low profile power relay (height 16.5mm) employing unique construction
- High insulation by employing reinforced insulation construction
  - Insulation distance: 8mm (between coil and contact)
  - Dielectric strength: 5,000V (between coil and contact)
  - Surge strength: 10,000V (between coil and contact)
- UL, CSA, VDE recognized
- Flux proof sealing, RTII
- RoHS Compliant



#### ■ APPLICATIONS

Control of industrial equipment, home appliances, I/O modules etc.

#### ■ PART NUMBERS

[Example] FTR-F1 A L 012 R - RG  
 (a) (b) (c) (d) (e) (f)

(a)	Relay type	FTR-F1 series
(b)	Contact configuration	A : 2a (2 Form A, DPST-NO) C : 2c (2 Form C, DPDT)
(c)	Coil type (power)	A : Standard type (530mW, 2 Form C) L : High sensitive type (400mW)
(d)	Coil rated voltage	12 : 1.5....110VDC (high sensitive type: 1.5....48VDC) Please refer to coil rating table
(e)	Contact rating	R : 8A
(f)	Special type	Nil : Standard type RG : Transparent cover type

Actual marking does not carry the type name : "FTR"

E.g.: Ordering code: FTR-F1AL005R Actual marking: F1AL005R

FTR-F1AA( )R(-RG) are not available

## ■ SPECIFICATIONS

Item		Specifications		Remarks/Conditions	
		Standard type	Transparent type (-RG)		
Contact Data	Configuration	2a (2 Form A, DPST-NO), 2c (2 Form C, DPDT)			
	Construction	Single			
	Material	Movable: Gold plate silver tin oxide Stationary: Silver tin oxide			
	Resistance (initial)	Max. 100mΩ		At 1A, 6VDC	
	Contact rating	8A, 250VAC/24VDC		Resistive	
	Max. carrying current	8A			
	Max. switching voltage	400VAC/300VDC			
	Max. switching power	2,000VA/192W			
	Min. switching load <sup>*1</sup>	10mA, 5VDC		Reference	
Coil	Rated power (20°C)	Standard type: 530~550mW <sup>*2</sup> High sensitive type: 400mW			
	Operate power (20°C)	Standard type: 260~270mW <sup>*2</sup> High sensitive type: 225mW			
	Operating temperature range	-40 to +75 °C	-40 to +70 °C	No frost	
Time	Operate	Max. 15ms		No diode, without bounce	
	Release	Max. 5ms		No diode, without bounce	
Life	Mechanical	Min. 20x 10 <sup>6</sup> operations			
	Electrical (resistive)	AC load	Min. 50 x 10 <sup>3</sup> operations		
		DC load	Min. 50 x 10 <sup>3</sup> operations		
Insulation	Resistance (initial)	Min. 1,000MΩ		At 500VDC	
	Dielectric strength	Open contacts	1,000VAC (50/60Hz), 1 minute		
		Coil to contacts	5,000VAC (50/60Hz), 1 minute		
		Adjacent contacts	3,000VAC (50/60Hz) 1 minute		
	Surge strength	Coil to contacts	10,000V/ 1.2 x 50μs standard wave		
	Clearance	8mm			
	Creepage	8mm			
	EN61810-1, VDE0435	Voltage	250V		
Pollution degree		3			
Material group		IIIa			
Category		C / 250V (reference voltage) (VDE0110b)			
Others	Vibration resistance	Misoperation	10 to 55 to 10Hz single amplitude 0.825mm		Coil ON/OFF, 3 axis, total 6 cycles
		Endurance	10 to 55 to 10Hz single amplitude 1.65mm		Coil OFF, 3 axis, total 6 hours
	Shock resistance	Misoperation	Min. 100 m/s <sup>2</sup> (11±1ms)		Coil ON/OFF, 3 axis, total 36 operations
		Endurance	Min. 1,000 m/s <sup>2</sup> (6±1ms)		Coil OFF, 3 axis, total 18 operations
	Dimensions / Weight	12.8 x 29.0 x 16.5mm / Approx. 12.0g			
	Sealing	Flux proof, RTII			

\*1: Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

\*2: Standard sensitiveness is applicable for 2c (DPDT)

## ■ COIL DATA

### 530mW type (standard)

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance $\pm 10\%$ ( $\Omega$ )	Must Operate Voltage <sup>*1</sup> (VDC)	Must Release Voltage <sup>*1</sup> (VDC)	Rated Power (mW)
1.5	1.5	4.2	1.05	0.15	530
005	5	47	3.5	0.5	
006	6	68	4.2	0.6	
009	9	155	6.3	0.9	
012	12	270	8.4	1.2	
024	24	1,100	16.8	2.4	
048	48	4,400	33.6	4.8	
060	60	6,800	42.0	6.0	
110	110	22,000	77.0	11.0	550

### 400mW type (high sensitive)

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance $\pm 10\%$ ( $\Omega$ )	Must Operate Voltage <sup>*1</sup> (VDC)	Must Release Voltage <sup>*1</sup> (VDC)	Rated Power (mW)
1.5	1.5	5.6	1.125	0.15	400
003	3	22.5	2.25	0.3	
005	5	62	3.75	0.5	
006	6	90	4.5	0.6	
009	9	202	6.75	0.9	
012	12	360	9	1.2	
024	24	1,440	18	2.4	
048	48	5,760	36	4.8	

Note 1: All values given in the coil table(s) are valid at 20°C ambient temperature, at zero contact current, without pre-energizing and \* are specified at pulse wave voltage.

Note 2: When applying a higher than rated coil voltage, please refer to the "coil temperature rise" and "operating range". Reference graphs for the effects on the relay operating behaviour.

## ■ SAFETY STANDARDS

Type	Compliance	Contact Rating
UL	Flammability: UL 94-V-0 (plastics)	
	UL 508 File No. E63614	8A, 24VDC (resistive) 8A, 250VAC (resistive)
CSA	C22.2 No. 14 File No. LR40304	1/6 hp, 125VAC 1/4 hp, 250VAC Pilot duty: C300, R300 (Note: Except -RG)
VDE	IEC/EN61810-1 EN60335-1 clause 15.3; 16.3; 29.1; 29.2; 29.3 EN60730-1 clause 12.2; 13.2; 20.1; 20.2; 20.3	8A, 250 VAC ( $\cos\phi=1$ ) 8A, 24VDC (0ms)

## ■ PART NUMBER LIST


Part Number	Contact Configuration	Rated Power	Special Type
FTR-F1AL( )R	2a (2 Form A)	Approx. 400mW	-
FTR-F1AL( )R-RG			Transparent cover
FTR-F1CA( )R	2c (2 Form C)	Approx. 530 to 550mW	-
FTR-F1CA( )R-RG			Transparent cover
FTR-F1CL( )R		Approx. 400mW	-
FTR-F1CL( )R-RG			Transparent cover




## CHARACTERISTIC DATA

(Characteristic data is not guaranteed value but measured values of samples from production line.)


Coil temperature rise

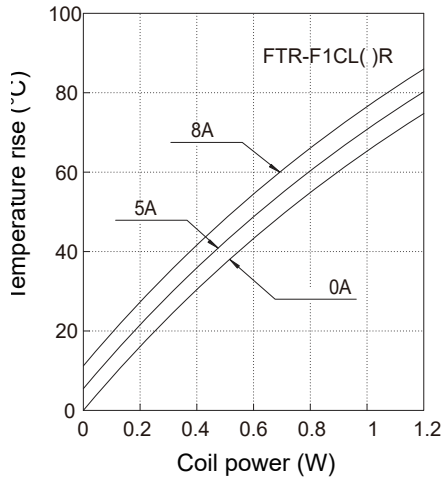


Operating range

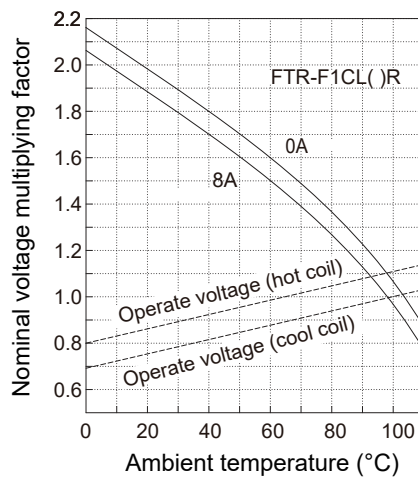


Maximum switching power

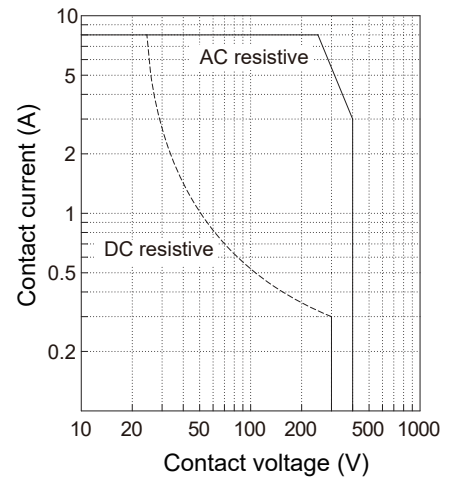


Life curve

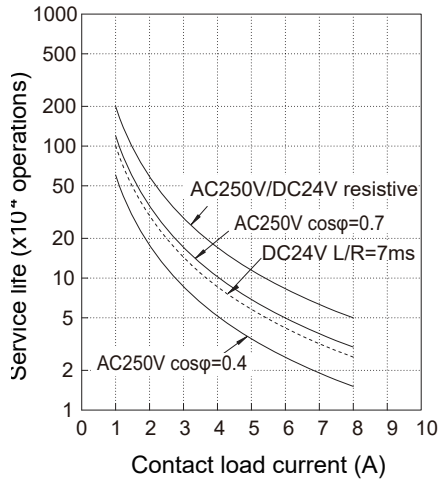

Distribution of operate/release voltage

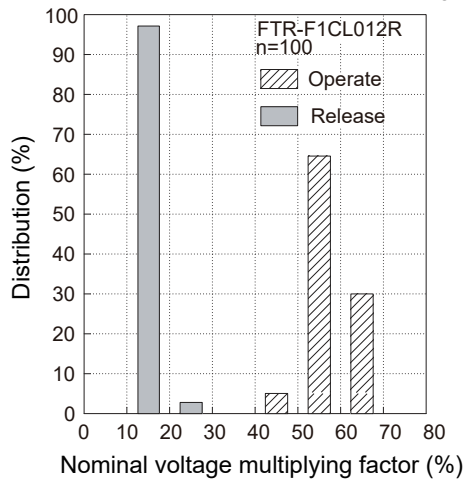

Distribution of contact resistance

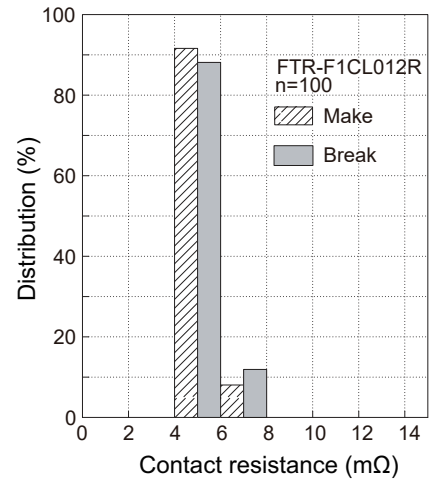

## CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

## GENERAL INFORMATION

### 1. ROHS Compliance

- All relays produced by FCL Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

### 2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

#### Flow Solder Condition:

Pre-Heating: Maximum 120°C within 90 sec.

Soldering: Dip within 5 sec. at 255°C±5°C solder bath

Relay must be cooled by air immediately after soldering

#### Solder by Soldering Iron:

Soldering Iron: 30-60W

Temperature: Maximum 340-360°C

Duration: Maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

### 4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

## Contact

### Japan

FCL COMPONENTS LIMITED  
Shinagawa Seaside Park Tower  
12-4, Higashi-shinagawa 4-chome,  
Tokyo 140 0002, Japan  
Tel: +81-3-3450-1682  
Email: fcl-contact@cs.fcl-components.com

### North and South America

FCL COMPONENTS AMERICA, INC.  
2055 Gateway Place Suite 480,  
San Jose, CA 95110 USA  
Tel: +1-408-745-4900  
Email: contact@fcl-components.us

### Europe

FCL COMPONENTS EUROPE B.V.  
Diamantlaan 25  
2132 WV Hoofddorp, Netherlands  
Tel: +31-23-556-0910  
Email: info@fcl-components.eu

### Asia Pacific

FCL COMPONENTS ASIA PTE LTD.  
No. 20 Harbour Drive, #07-01B  
Singapore 117612  
Tel: +65-6375-8560  
Email: fcal@fcl-components.com

### China

FCL COMPONENTS (SHANGHAI) CO.,LTD.  
Unit 1105, Central Park - Jing An,  
No.329 Heng Feng Road, Shanghai  
200070, China  
Tel: +86-21-3253 0998  
Email: fcsh@fcl-components.com

### Hong Kong

FCL COMPONENTS HONG KONG CO.,  
LIMITED  
Unit 2313, Seapower Tower, Concordia  
Plaza, No.1 Science Museum Road,  
TST, Kowloon, Hong Kong  
Tel: +852-2881-8495  
Email: fcal@fcl-components.com

Web: [www.fcl-components.com/en/](http://www.fcl-components.com/en/)

---

© 2024 FCL Components Limited. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

FCL Components Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. FCL Components Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch system, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use FCL Components Products without securing the sufficient safety and reliability required for the High Safety Required Applications.

In addition, FCL Components shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of FCL Components Products in the High Safety Required Applications.

FCL Components warrants that its Products, if properly used and services, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.



The contents, data and information in this datasheet are provided by FCL Components Limited as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

FCL Components has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

FCL Components Limited and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Nor do FCL Components Limited and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. December 18, 2024.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View FTR-F1CL024R on WIN SOURCE](#)
-  [FCL Components Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management