

XtremeSense™ 2D TMR Angle Sensor

FEATURES AND BENEFITS

- Angle error less than 0.60° (after one-time compensation) over full temperature range
- Dual full-bridge resistor network
- Operating magnetic field: 250 to 900 G
- Differential outputs for SIN and COS axes
- Supply voltage: 1.0 to 5.5 V
- AEC-Q100 Grade 1
- Package options:
 - 8-lead TSSOP
 - 8-lead DFN, 2.00 mm × 2.00 mm × 0.45 mm

APPLICATIONS

- Angular measurements
- Rotary and angular sensors
- BLDC motors

DESCRIPTION

The CT310 is a 2D angle sensor in a dual full-bridge configuration from Allegro developed on its patented XtremeSense™ 2D tunnel magnetoresistance (TMR) technology. The operating magnetic field for this 2D sensor is 250 to 900 G and has an angle error less than 0.60° over temperature following a one-time offset and gain compensation. The sensitive axes of the TMR elements are orthogonal to each other, providing a 90° phase separation between the sine and cosine outputs when measured differentially. This phase separation is inherently independent of magnet pole spacing and air gap.

The CT310 is available in a 8-lead TSSOP package, and for space-critical applications, a low-profile and small form factor 8-lead DFN package that is 2.00 mm × 2.00 mm × 0.45 mm in size. The packages are RoHS compliant and lead (Pb) free with a 100% matte-tin-plated leadframe.

FUNCTIONAL BLOCK DIAGRAM

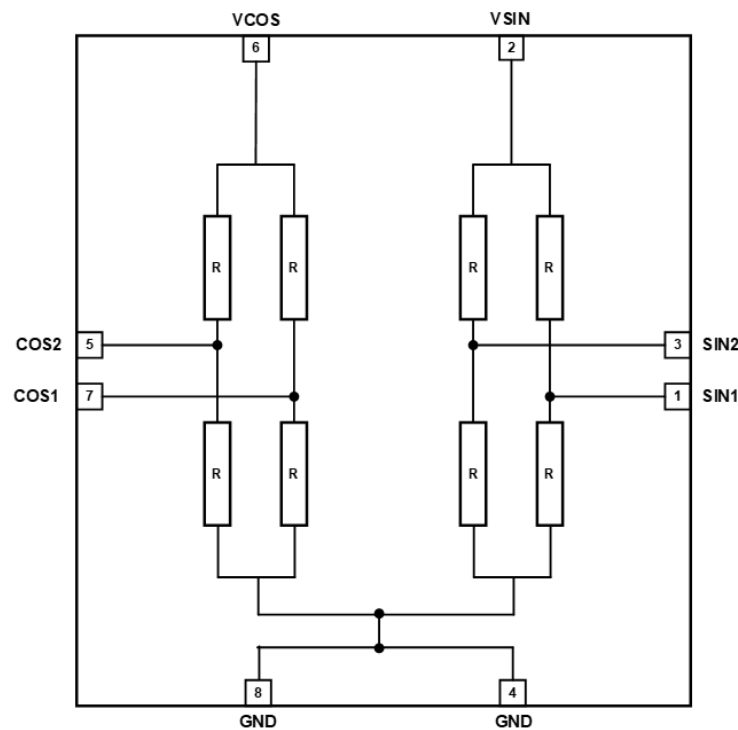


Figure 1: CT310 Functional Block Diagram

Table of Contents

| | | | |
|---|---|---|----|
| Features and Benefits..... | 1 | Electrical Characteristics..... | 7 |
| Description..... | 1 | Recommended Application Circuit..... | 9 |
| Applications..... | 1 | Applications Information..... | 10 |
| Functional Block Diagram..... | 1 | Package Outline Drawings..... | 11 |
| Selection Guide..... | 2 | Tape and Reel Pocket Drawings and Dimensions..... | 13 |
| Absolute Maximum Ratings..... | 2 | Package Information..... | 15 |
| Recommended Operating Conditions..... | 2 | Revision History..... | 16 |
| Pinout Diagrams and Terminal Lists..... | 4 | | |

SELECTION GUIDE

| Part Number | Operating Temp. Range (°C) | Automotive Grade | Output Type | Package | Packing |
|-------------|----------------------------|------------------|--------------|---|---------------|
| CT310LS-AT8 | 40 to 125 | Grade 1 | Differential | 8-lead TSSOP 6.40 mm × 3.05 mm × 1.10 mm | Tape and Reel |
| CT310LS-FT8 | 40 to 150 | – | Differential | | |
| CT310LS-FD8 | 40 to 150 | – | Differential | 8-lead DFN 2.00 mm × 2.00 mm × 0.45 mm | Tape and Reel |

ABSOLUTE MAXIMUM RATINGS [1]

| Characteristic | Symbol | Notes | Rating | Unit |
|--|----------------------|--|------------|------|
| Forward Voltage | V_{COS}, V_{SIN} | | 6.0 | V |
| Reverse Voltage | V_{RCOS}, V_{RSIN} | | -0.3 | V |
| Electrostatic Discharge Protection Level | ESD | Human Body Model (HBM) per JESD22-A114 | ±4.0 (min) | kV |
| | | Charged Device Model (CDM) per JESD22-C101 | ±1.0 (min) | kV |
| Maximum Magnetic Field | B_{MAX} | ≤5 minutes at $T_A = 25^{\circ}C$ | ±2000 | G |
| Operating Ambient Temperature | T_A | Automotive | -40 to 125 | °C |
| | | Full Range | -40 to 150 | °C |
| Storage Temperature | T_{STG} | | -65 to 165 | °C |
| Lead Soldering Temperature | T_L | 10 seconds | 260 | °C |

[1] Stresses exceeding the absolute maximum ratings may damage the CT310 and may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

THERMAL CHARACTERISTICS

| Characteristic | Symbol | Test Conditions | Value | Unit |
|--|-----------------|-----------------|-------|------|
| Junction-to-Ambient Thermal Resistance | $R_{\theta JA}$ | TSSOP-8 package | TBD | °C/W |
| | | DFN-8 package | TBD | °C/W |

PINOUT DIAGRAMS AND TERMINAL LISTS

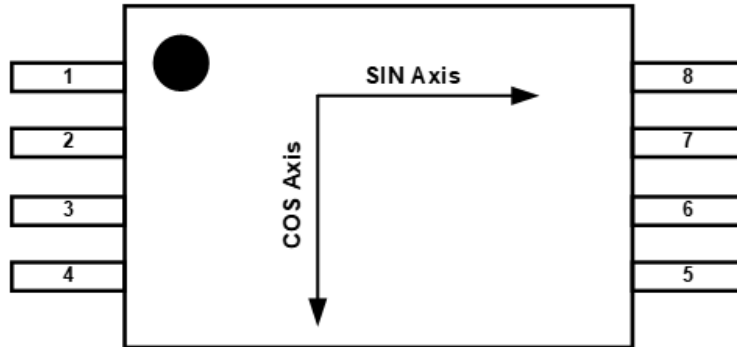


Figure 2: TSSOP-8 – Top-Down View

Terminal List

| Number | Name | Function |
|--------|---------------------|------------------------------------|
| 1 | SIN1 ^[1] | Differential output #1 for sine. |
| 2 | VSIN | Supply voltage for sine |
| 3 | SIN2 ^[1] | Differential output #2 for sine. |
| 4 | GND | Ground for sine. |
| 5 | COS2 ^[2] | Differential output #2 for cosine. |
| 6 | VCOS | Supply voltage for cosine |
| 7 | COS1 ^[2] | Differential output #1 for cosine. |
| 8 | GND | Ground for cosine. |

^[1] SIN2 – SIN1 = SIN.

^[2] COS2 – COS1 = COS.

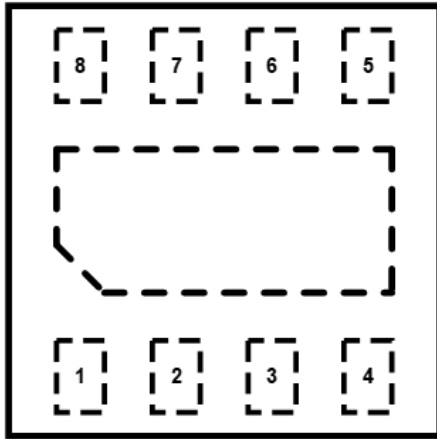


Figure 3: DFN-8, Top-Down View

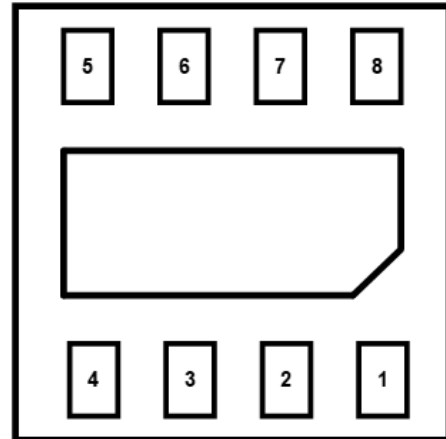


Figure 4: DFN-8, Bottom-Up View

Terminal List

| Number | Name | Function |
|--------|----------|------------------------------------|
| 1 | SIN1 [1] | Differential output #1 for sine. |
| 2 | VSIN | Supply voltage for sine |
| 3 | SIN2 [1] | Differential output #2 for sine. |
| 4 | GND | Ground for sine. |
| 5 | COS2 [2] | Differential output #2 for cosine. |
| 6 | VCOS | Supply voltage for cosine |
| 7 | COS1 [2] | Differential output #1 for cosine. |
| 8 | GND | Ground for cosine. |

[1] SIN2 – SIN1 = SIN.

[2] COS2 – COS1 = COS.

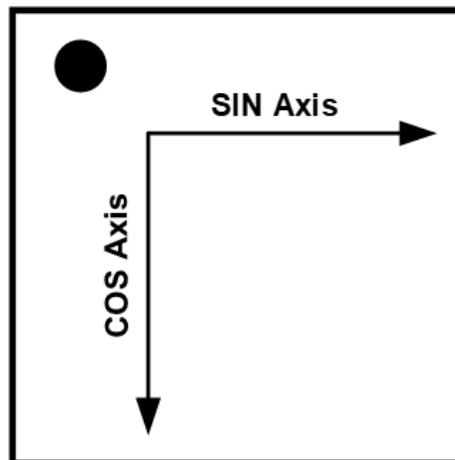


Figure 5: CT310 Axes of Sensitivity for DFN-8

ELECTRICAL CHARACTERISTICS: Valid over all operating voltage and temperature conditions, unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. [3] | Max. | Unit |
|--|--|--|-------|----------|-------|-------------------------------------|
| ELECTRICAL | | | | | | |
| Supply Voltage Range | $V_{\text{COS}}, V_{\text{SIN}}$ | | 1.0 | – | 5.5 | V |
| COS and SIN Differential Output Voltage Range | $V_{\text{COS}_D}, V_{\text{SIN}_D}$ | | –1.37 | – | +1.37 | V |
| Bridge Resistance | R_{BRIDGE} | $T_A = 25^\circ\text{C}$ | 3.0 | 4.5 | 6.0 | k Ω |
| Temperature Coefficient Resistance [1] | TCR | | – | 0.05 | – | %/°C |
| MAGNETIC | | | | | | |
| Operating Magnetic Field | B | | 250 | 600 | 900 | G |
| DIFFERENTIAL OUTPUTS | | | | | | |
| Angle Error [2] | θ_{ERR} | After compensation | – | 0.30 | 0.60 | ° |
| Angle Error @ 20 mT [1][2] | $\theta_{\text{ERR}_20\text{mT}}$ | After compensation, $B_{\text{OP}} = 20 \text{ mT}$ | – | – | 0.90 | ° |
| Angle Error Due to Hysteresis [1] | $\theta_{\text{ERR}_\text{HYST}}$ | | – | – | TBD | ° |
| Lifetime Shift | B_{SHIFT} | | – | – | TBD | ° |
| SIN, COS Differential Output Voltage Peak-to-Peak | $V_{\text{SIN}_D}, V_{\text{COS}_D}$ | $T_A = 25^\circ\text{C}$ | 0.35 | 0.45 | 0.50 | V/V |
| Temperature Coefficient of Differential Output [1] | TCV_{OUT} | | – | –0.16 | – | %/°C |
| SIN, COS Voltage Offset | $V_{\text{OFF}_\text{SIN}}, V_{\text{OFF}_\text{COS}}$ | | – | ±1 | ±5 | mV/V |
| SIN, COS Amplitude Synchronism Ratio | k | | 97 | 100 | 103 | % |
| Temperature Coefficient of Amplitude Synchronism [1] | TC_k | | – | 0.005 | – | %/°C |
| SIN, COS Orthogonality Error | $\text{OE}_{\text{SIN}}, \text{OE}_{\text{COS}}$ | Deviation from ideal phase separation between SIN and COS | –2 | 0 | 2 | ° |
| SIN, COS Response Time [1] | t_{RESPONSE} | $C_L = 22 \text{ pF}$ | – | 1.0 | – | μs |
| Noise [1] | e_N | $f_{\text{BW}} = 1 \text{ Hz to } 10 \text{ kHz}, V_{\text{DD}} = 3.0 \text{ V}$ | – | 2.4 | – | $\mu\text{V}_{\text{RMS}}/\text{V}$ |

[1] Guaranteed by design and characterization; not tested in production.

[2] Hysteresis error and output noise are included in the Angular Error specification.

[3] Typical values correspond to performance at $V_{\text{DD}} = 3.0 \text{ V}$ and $T_A = 25^\circ\text{C}$, unless otherwise specified.

ELECTRICAL CHARACTERISTICS

$V_{DD} = 3.0\text{ V}$ and $T_A = 25^\circ\text{C}$ (unless otherwise specified)

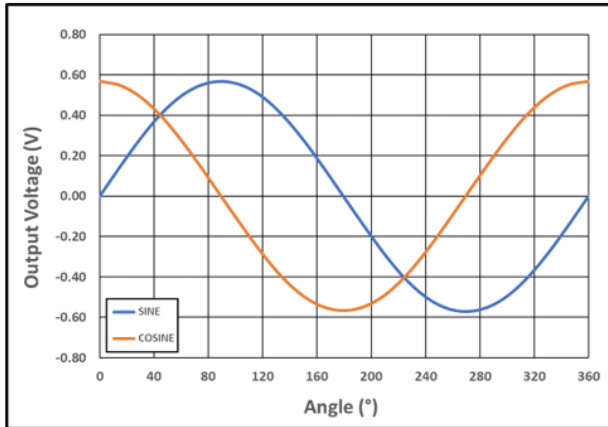


Figure 7: Output Voltage vs. Angle at B = 250 G

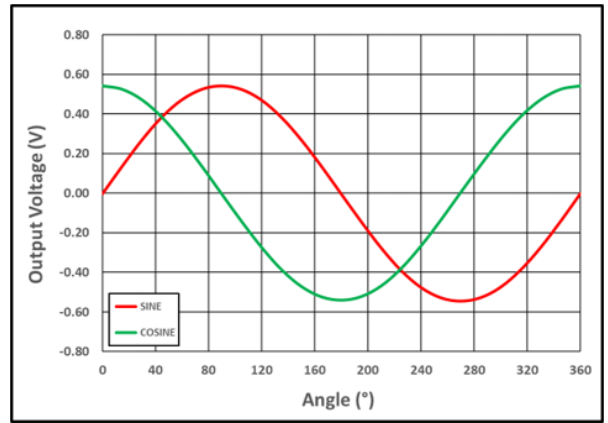


Figure 8: Output Voltage vs. Angle at B = 900 G



Figure 9: Differential Output Voltage (V/V) over Temperature, B = TBD G

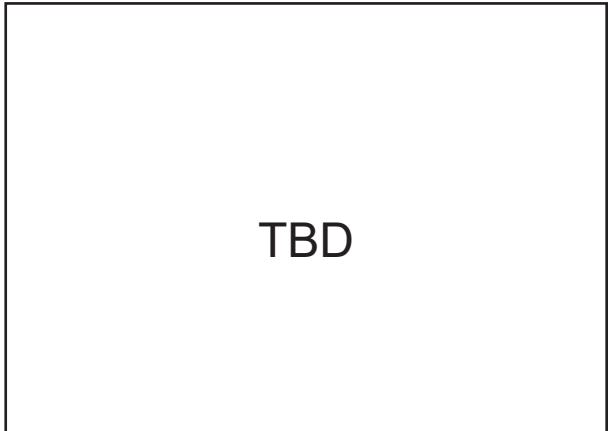


Figure 10: Differential Output Voltage (mV/V) over Temperature, B = TBD G



Figure 11: Orthogonality Error over Temperature, B = TBD G



Figure 12: Angle Error After Compensation (25°C, TBD G) over Field

RECOMMENDED APPLICATION CIRCUIT

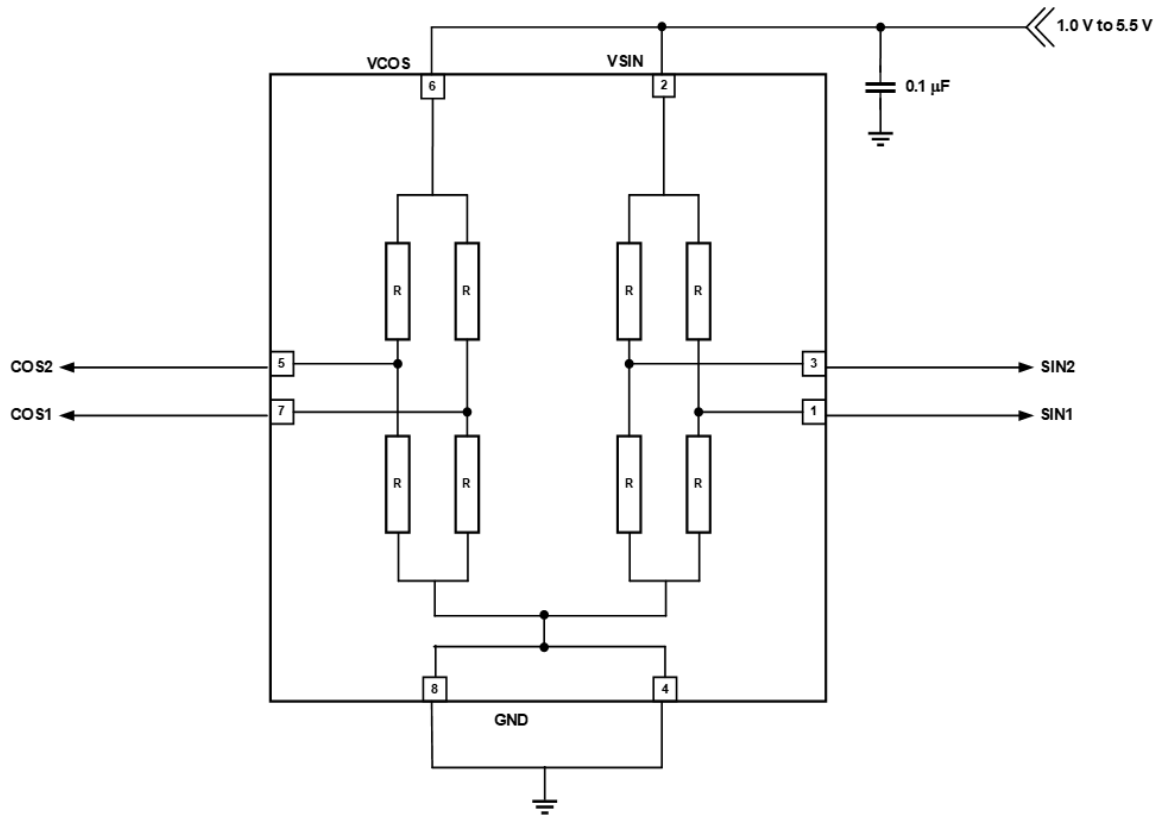


Figure 13: CT310 Application Diagram

Table 1: Recommended External Components

| Component | Description | Vendor and Part Number | Parameter | Min. | Typ. | Max. | Unit |
|------------------|-------------|--------------------------|-----------|------|------|------|------|
| C _{BYP} | 0.1 μF, X7R | Murata GRM033Z71A104KE14 | C | – | 0.1 | – | μF |

Applications Information

The XtremeSense TMR sensor location for the CT310 for the x, y dimensions are shown in Figure 11 and Figure 12 for the TSSOP-8 and DFN-8 packages respectively. Figure 13 and Figure 14 illustrates the location of the CT310 XtremeSense TMR sensor from the z dimension. All dimensions in the figures below are nominal.

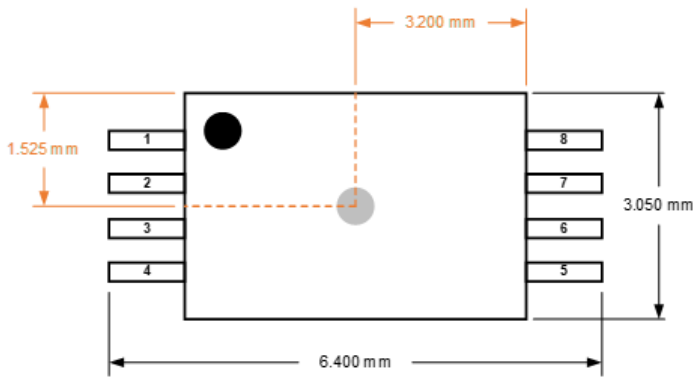


Figure 14: XtremeSense TMR Sensor Location in x-y Plane for CT310 in TSSOP-8 Package

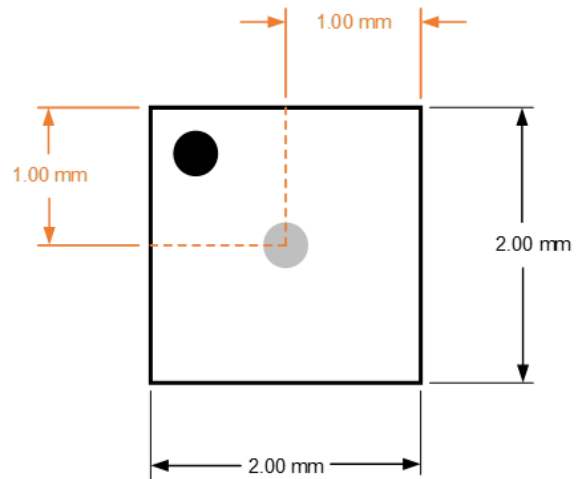


Figure 15: XtremeSense TMR Sensor Location in x-y Plane for CT310 in DFN-8 Package

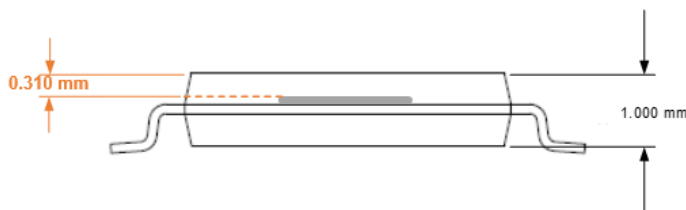


Figure 16: XtremeSense TMR Sensor Location in z Dimension for CT310 in TSSOP-8 Package

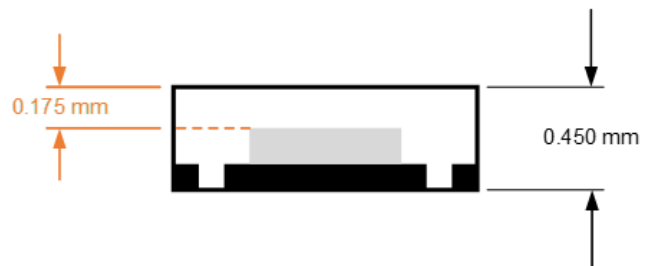


Figure 17: XtremeSense TMR Sensor Location in z Dimension for CT310 in DFN-8 Package

PACKAGE OUTLINE DRAWINGS


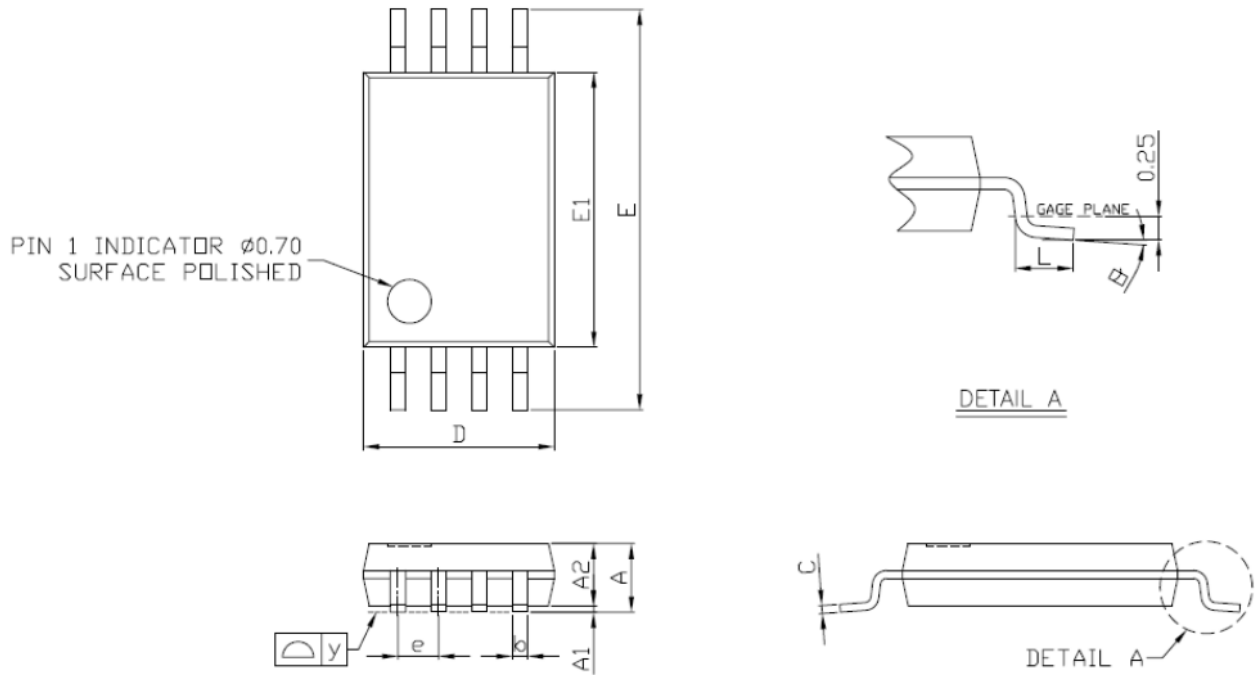


Figure 18: TSSOP-8 Package Drawing

Table 2: CT310 TSSOP-8 Package Dimensions

| Symbol | Dimensions in Millimeters (mm) | | |
|--------|--------------------------------|-------|-------|
| | Min. | Typ. | Max. |
| A | 1.05 | 1.10 | 1.20 |
| A1 | 0.05 | 0.10 | 0.15 |
| A2 | – | 1.00 | 1.05 |
| b | 0.25 | – | 0.30 |
| C | – | 0.127 | – |
| D | 2.90 | 3.05 | 3.10 |
| E | 6.20 | 6.40 | 6.60 |
| E1 | 4.30 | 4.40 | 4.50 |
| e | – | 0.65 | – |
| L | 0.50 | 0.60 | 0.70 |
| y | – | – | 0.076 |
| θ | 0° | 4° | 8° |

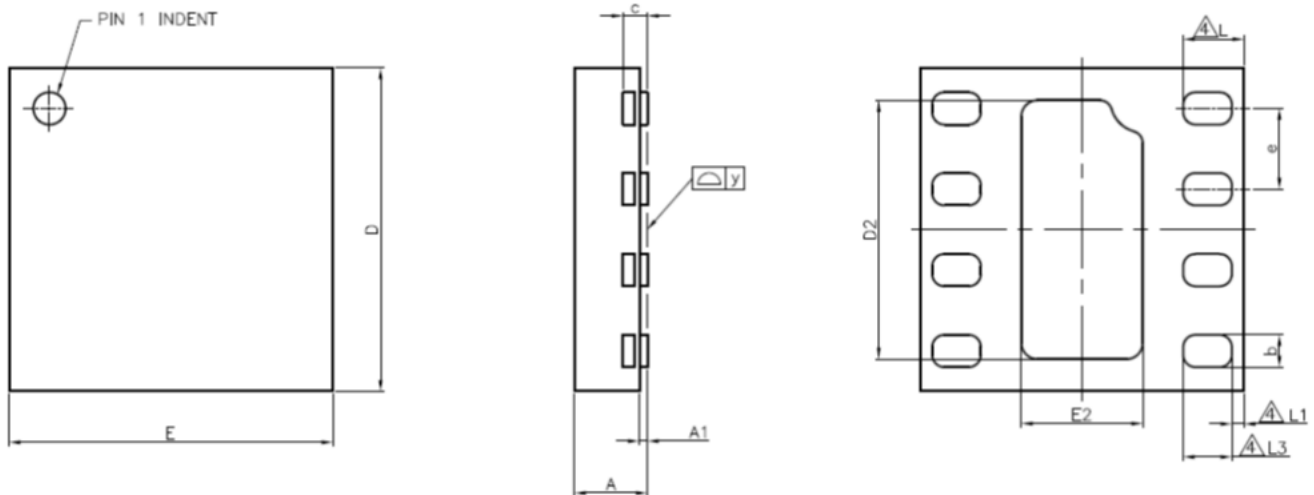

NOTES:


1. The terminal #1 identifier is a laser marked feature.

Figure 19: DFN-8 Package Drawing

Table 3: CT310 DFN-6 Package Dimensions

| Symbol | Dimensions in Millimeters (mm) | | |
|-------------|--------------------------------|-----------|-------|
| | Min. | Typ. | Max. |
| A | 0.40 | 0.45 | 0.50 |
| A1 | 0.00 | 0.02 | 0.05 |
| b | 0.15 | 0.20 | 0.25 |
| c | – | 0.150 REF | – |
| D | 1.925 | 2.000 | 2.075 |
| D2 | 1.550 | 1.600 | 1.650 |
| E | 1.925 | 2.000 | 2.075 |
| E2 | 0.700 | 0.750 | 0.800 |
| e | – | 0.500 | – |
| L Δ | 0.325 | 0.375 | 0.425 |
| L1 Δ | – | 0.075 | – |
| L3 Δ | 0.250 | 0.300 | 0.350 |
| y | 0.000 | – | 0.075 |

TAPE AND REEL POCKET DRAWINGS AND DIMENSIONS

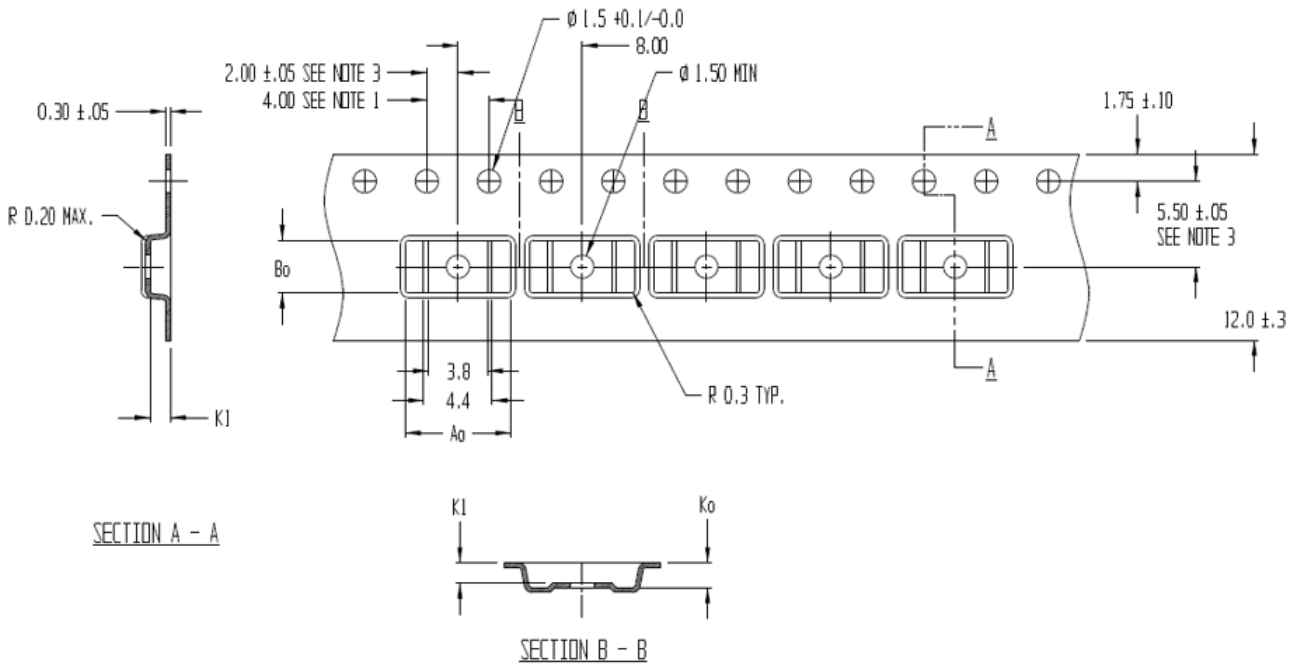

$A_0 = 6.80$
 $B_0 = 3.40$
 $K_0 = 1.60$
 $K_1 = 1.30$

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. CAMBER IN COMPLIANCE WITH EIA 481
3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE

Figure 20: TSSOP-8 Tape and Pocket Drawings

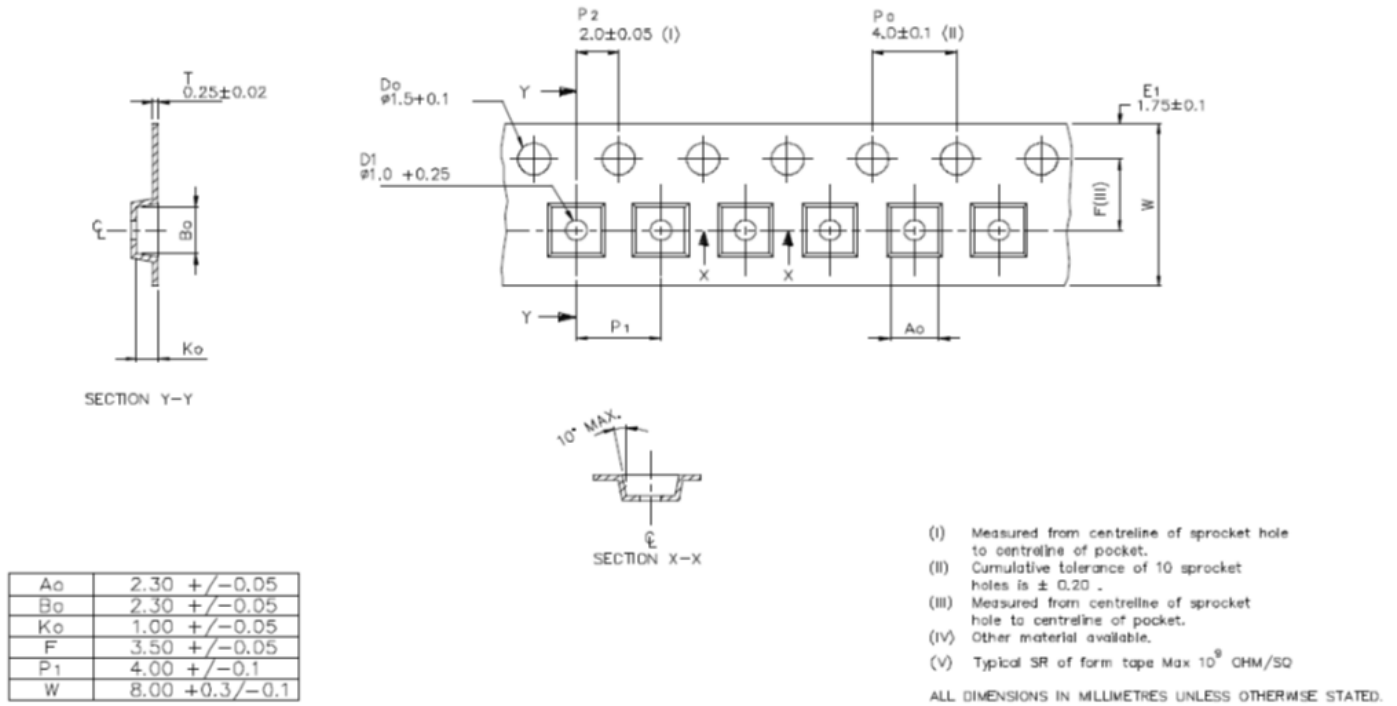


Figure 21: DFN-8 Tape and Pocket Drawings

PACKAGE INFORMATION

Table 4: CT310 Package Information

| Part Number | Package Type | # of Leads | Package Quantity | Lead Finish | Eco Plan [1] | MSL Rating [2] | Operating Temperature [3] | Device Marking [4] |
|-------------|--------------|------------|------------------|-------------|--------------|----------------|---------------------------|-----------------------|
| CT310LS-AT8 | TSSOP | 8 | 3000 | Sn | Green & RoHS | 1 | -40°C to 125°C | CT310LS-AT8 YYWWSS |
| CT310LS-FT8 | TSSOP | 8 | 3000 | Sn | Green & RoHS | 1 | -40°C to 150°C | CT310LS-FT8 YYWWSS |
| CT310LS-FD8 | DFN | 8 | 3000 | Sn | Green & RoHS | 1 | -40°C to 150°C | 310F YWWSS |

[1] RoHS is defined as semiconductor products that are compliant to the current EU RoHS requirements. It also will meet the requirement that RoHS substances do not exceed 0.1% by weight in homogeneous materials. Green is defined as the content of chlorine (Cl), bromine (Br), and antimony trioxide based flame retardants satisfy JS709B low halogen requirements of $\leq 1,000$ ppm.

[2] MSL Rating = Moisture Sensitivity Level Rating as defined by JEDEC standard classifications.

[3] Package will withstand ambient temperature range of -40°C to 150°C and storage temperature range of -65°C to 165°C.

[4] Device Marking for TSSOP is defined as CT310LS-XT8 YYWWSS where CT310LS = base part number, X = temperature code, T8 = TSSOP-8 package, YY = year, WW = work week, and SS = sequential number. DFN is defined as 300X where X = temperature code and Y = year, WW = work week, and S = sequential number.

Revision History

| Number | Date | Description |
|--------|------------------|--|
| 1 | December 8, 2023 | Document rebranded and minor editorial updates |

Copyright 2023, Allegro MicroSystems.

Allegro MicroSystems reserves the right to make, from time to time, such departures from the detail specifications as may be required to permit improvements in the performance, reliability, or manufacturability of its products. Before placing an order, the user is cautioned to verify that the information being relied upon is current.

Allegro's products are not to be used in any devices or systems, including but not limited to life support devices or systems, in which a failure of Allegro's product can reasonably be expected to cause bodily harm.

The information included herein is believed to be accurate and reliable. However, Allegro MicroSystems assumes no responsibility for its use; nor for any infringement of patents or other rights of third parties which may result from its use.

Copies of this document are considered uncontrolled documents.

For the latest version of this document, visit our website:

www.allegromicro.com

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View CT310LS-ID8 on WIN SOURCE](#)
- [Allegro MicroSystems, LLC Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management