

24-32GHz 4-way Wilkinson Power Divider

PDW07069

DESCRIPTION

DLI's 24-32GHz 4-way power divider / combiner offers unmatched size and performance in a surface mount configuration. This power divider utilizes DLI's low loss temperature stable materials which offer small size and minimal performance variation over temperature.

FEATURES


- Small Size
- Frequency Stable over Temperature
- Solder Surface Mount Package
- Excellent Repeatability
- Moisture Sensitivity Level: MSL1
- Operating & Storage Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω

SPECIFICATIONS*

Parameter	Frequency Range (GHz)	Min	Typ.	Max	
Nominal Power Splitting (dB)	24-32		6.0		
Nominal Phase Shift (Deg)			0.0		
Amplitude Balance (dB)					± .5
Phase Balance (Deg)					± 6.0
Excess Insertion Loss (dB)					1
Return Loss (dB)			10	14	
Isolation (dB)			10	14	
Input Power (W) ¹					TBD

*Electrical specifications based on typical probed performance at room temperature. Insertion loss shall vary ±0.5dB over temperature.

Typical Measured Performance

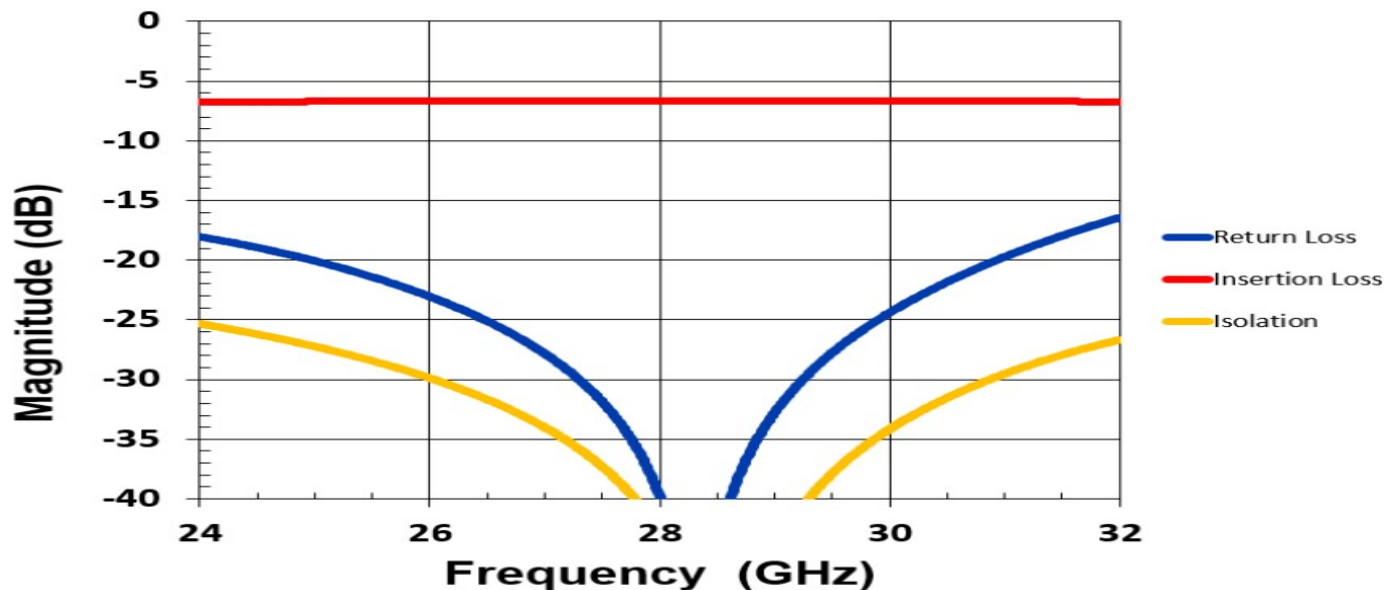


24-32GHz 4-way Wilkinson Power Divider

PDW07069


Physical Dimensions

Units = mm


Top View

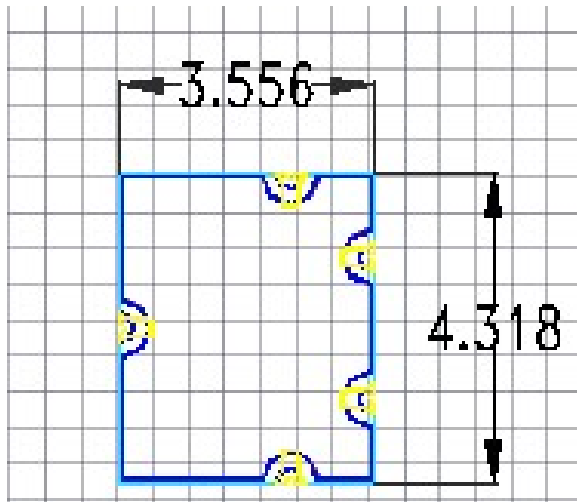


Bottom View

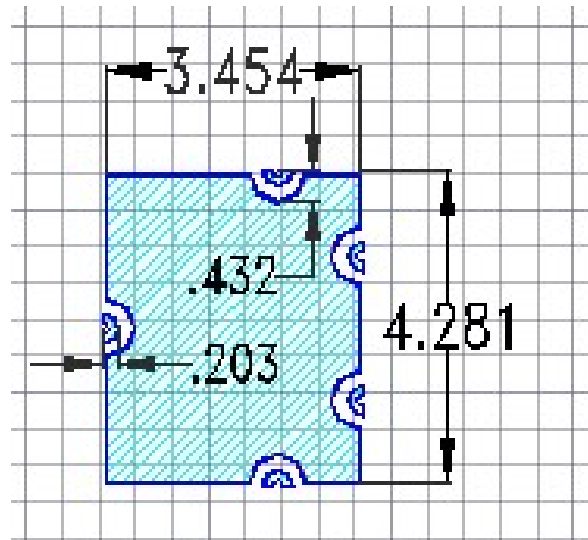

Top View Details

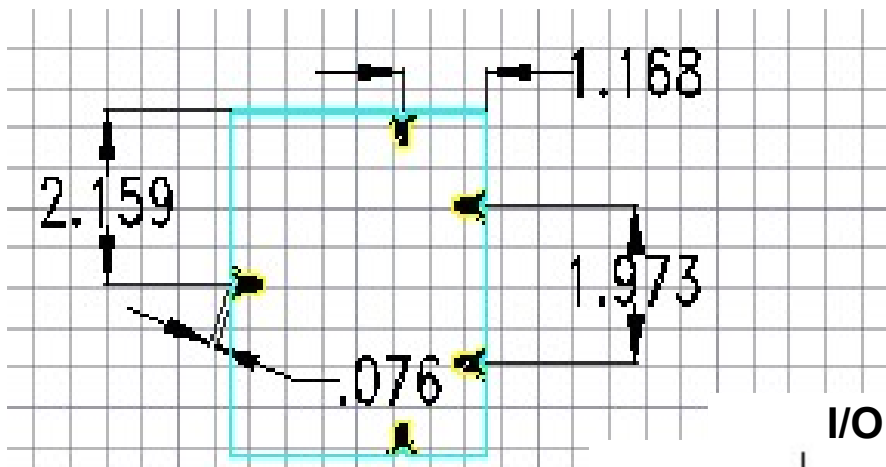


I/O Detail (inches)

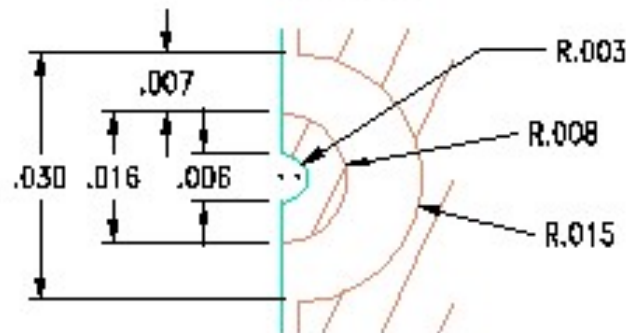

24-32GHz 4-way Wilkinson Power Divider

PDW07069

Recommended PCB Layout

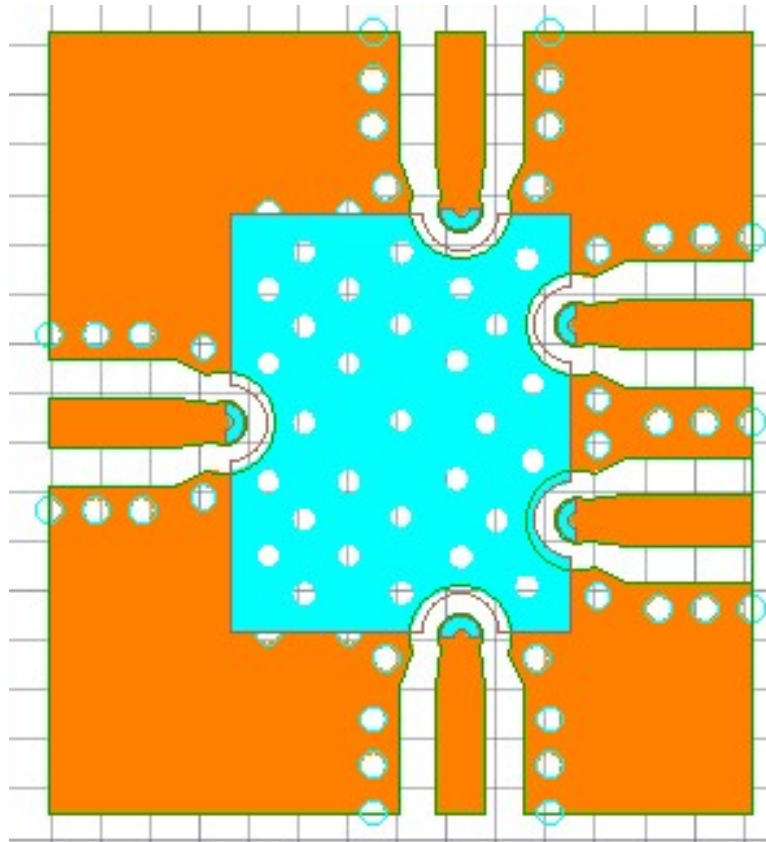

Recommended PCB board :

10.0 mil Roger Board RO4350B



50Ω GCPW traces are used to carry RF signals into the port

Ensure adequate grounding beneath the part.



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View PDW07069 on WIN SOURCE](#)
-  [Knowles Dielectric Labs Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management