



THE DATASHEET OF
2744040447





** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~ CATALOG ~ DRAWING

SIZE
B

3X 0.50mm W X 0.25mm T FLAT WIRE
FR# 0100017201

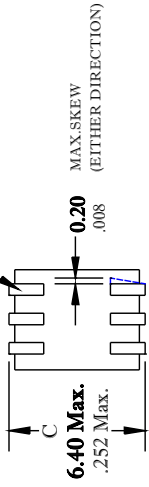

MINIMUM BREAKDOWN VOLTAGE

Impedance	25 MHz
	23 Min.

DIMENSIONS

BOLD NUMBERS ARE IN MILLIMETERS
LIGHT NUMBERS ARE IN INCHES

NOTES:

- 1 - WIRE TO BE OXYGEN FREE, HIGH CONDUCTIVITY COPPER.
- 2 - WIRE MEETS SOLDERABILITY SPECIFICATION WHEN TESTED PER FAIR-RITE PRODUCTS CORP. SOP# ELC-57.
- 3 - THIS PART MEETS FAIR-RITE PRODUCTS' VISUAL INSPECTION CRITERIA FOR SURFACE MOUNT BEADS.
- 4 - PART MEETS FAIR-RITE PRODUCTS' SOP ELC-27 FOR THERMAL SHOCK RESISTANCE.
- 5 - IMPEDANCE MEASURED USING AN HP4191A ON A 16092A TEST FIXTURE.
- 6 - THIS PART TO BE TAPED AND REELED
- 7 - COPLANARITY BETWEEN LEADS: **0.10mm (.004")** MAX.

FR# 44

		FAIR-RITE	
		TITLE	THREE - W
DRAWN BY	DATE	SIZE	B
D. FOOTE	8/23/2019		
CHKD BY			
APPROV BY			SCA

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View 2744040447 on WIN SOURCE](#)
- ⊖ [FAIR-RITE PRODUCTS](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management