



THE DATASHEET OF PTZTE2515A



Specification	Products	Type
	Zener Diode	PTZ Series

1. PRODUCTZener Diode
2. TYPEPTZ Series (3.6V ~ 43V)
3. APPLICATIONVoltage regulation
4. FEATURESmall power mold type
5. ABSOLUTE MAXIMUM RATING (Ta=25℃)

Power dissipationP 1000 mW

Junction temperatureTj 150 ℃

Storage temperatureTstg -55~150 ℃
6. ELECTRICAL CHARACTERISTIC (Ta=25℃)

Type No.	Zener voltage			Dynamic impedance		Reverse current		
		Vz (V)			Zz (Ω)		IR (μA)	
		MIN.	MAX.	Iz (mA)	MAX.	Iz (mA)	MAX.	VR (V)
PTZ 3.6	A	3.400	3.800	40	15	40	60	1.0
	B	3.600	4.000					
PTZ 3.9	A	3.700	4.100	40	15	40	40	1.0
	B	3.900	4.400					
PTZ 4.3	A	4.000	4.500	40	15	40	20	1.0
	B	4.300	4.800					
PTZ 4.7	A	4.400	4.900	40	10	40	20	1.0
	B	4.700	5.200					
PTZ 5.1	A	4.800	5.400	40	8	40	20	1.0
	B	5.100	5.700					
PTZ 5.6	A	5.300	6.000	40	8	40	20	1.5
	B	5.600	6.300					
PTZ 6.2	A	5.800	6.600	40	6	40	20	3.0
	B	6.200	7.000					
PTZ 6.8	A	6.400	7.200	40	6	40	20	3.5
	B	6.800	7.700					
PTZ 7.5	A	7.000	7.900	40	4	40	20	4.0
	B	7.500	8.400					
PTZ 8.2	A	7.700	8.700	40	4	40	20	5.0
	B	8.200	9.300					

ROHM CO., LTD.

Design <i>J. Maehara</i>	Approval <i>K. Tsuji</i>	Specification No. ZH0000*006	Date Sep/20/00
-----------------------------	-----------------------------	---------------------------------	-------------------

ROHM

Specification

Products

Zener Diode

Type

PTZ Series

Type No.	Zener voltage				Dynamic impedance		Reverse current	
		V _z (V)			Z _z (Ω)		I _R (μA)	
		MIN.	MAX.	I _z (mA)	MAX.	I _z (mA)	MAX.	V _R (V)
PTZ 9.1	A	8.500	9.600	40	6	40	20	6.0
	B	9.100	10.200					
PTZ 10	A	9.400	10.600	40	6	40	10	7.0
	B	10.000	11.200					
PTZ 11	A	10.400	11.600	20	8	20	10	8.0
	B	11.000	12.300					
PTZ 12	A	11.400	12.600	20	8	20	10	9.0
	B	12.000	13.500					
PTZ 13	A	12.400	14.100	20	10	20	10	10.0
	B	13.300	15.000					
PTZ 15	A	13.800	15.600	20	10	20	10	11.0
	B	14.700	16.500					
PTZ 16	A	15.300	17.100	20	12	20	10	12.0
	B	16.200	18.300					
PTZ 18	A	16.800	19.100	20	12	20	10	13.0
	B	18.000	20.300					
PTZ 20	A	18.800	21.200	20	14	20	10	15.0
	B	20.000	22.400					
PTZ 22	A	20.800	23.300	10	14	10	10	17.0
	B	22.000	24.500					
PTZ 24	A	22.800	25.600	10	16	10	10	19.0
	B	24.000	27.600					
PTZ 27	A	25.100	28.900	10	16	10	10	21.0
	B	27.000	30.800					
PTZ 30	A	28.000	32.000	10	18	10	10	23.0
	B	30.000	34.000					
PTZ 33	A	31.000	35.000	10	18	10	10	25.0
	B	33.000	37.000					
PTZ 36	A	34.000	38.000	10	20	10	10	27.0
	B	36.000	40.000					

ROHM CO., LTD.

Date

9/20/00

ROHM

Specification

Products

Zener Diode


Type

PTZ Series

Type No.		Zener voltage			Dynamic impedance		Reverse current	
		V _z (V)			Z _z (Ω)		I _R (μA)	
		MIN.	MAX.	I _z (mA)	MAX.	I _z (mA)	MAX.	V _R (V)
PTZ 39	A	37.000	41.000	10	50	10	10	30.0
PTZ 43	A	40.000	46.000	10	50	10	5	33.0

- (1) Small classification of zener voltage(V_z) shall be measured at 40ms after loading current.
 (2) Dynamic resistance(Z_z, Z_{zk}) shall be measured by applying very small AC current and specified current(I_z) simultaneously.

7. DIMENSION (UNIT:mm)

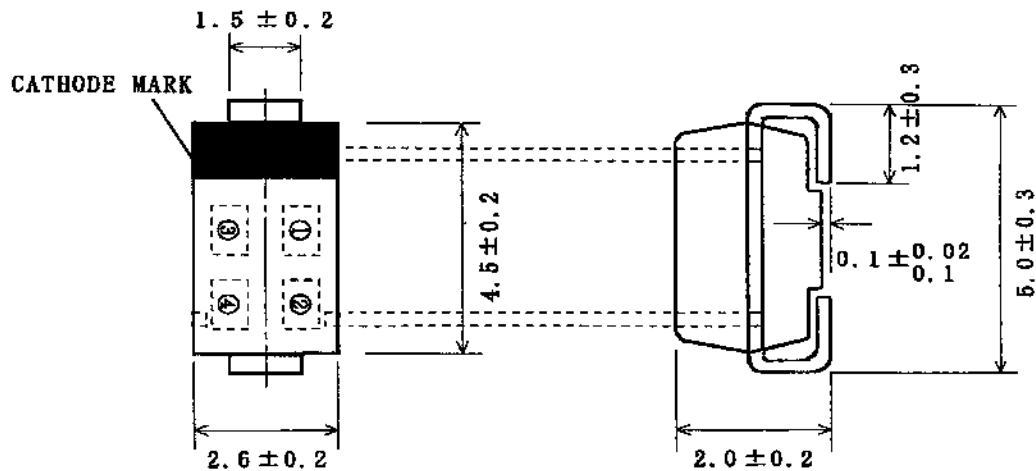

※ ①, ② Type No. EX. PTZ3.6A → 3.6 , A
 ③, ④ Manufacturing date EX. 1993. 7 → 3 , 7

8. Mass per piece 69 mg / pcs

ROHM CO., LTD.

Date

SEP 17 2000

ROHM

Specification


Products

Zener Diode

Type

PTZ Series

9. Power dissipation

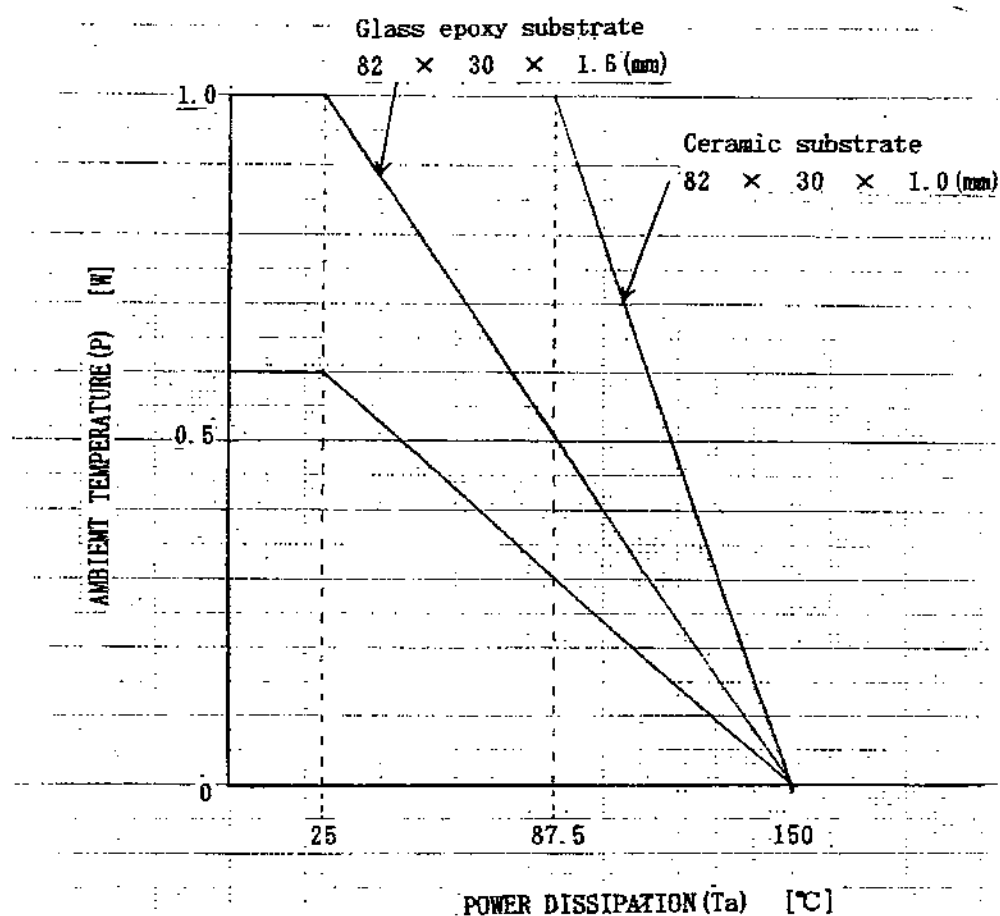

(NOTES) Pay much attention to the mounting density of power-drive devices when use.
Please refer to attached mounting density data of PTZ Series.

ROHM CO., LTD.

Date

1999.10.10



Specification



Products

Zener Diode

Type

PTZ Series

○ Mounting density data of PTZ Series.

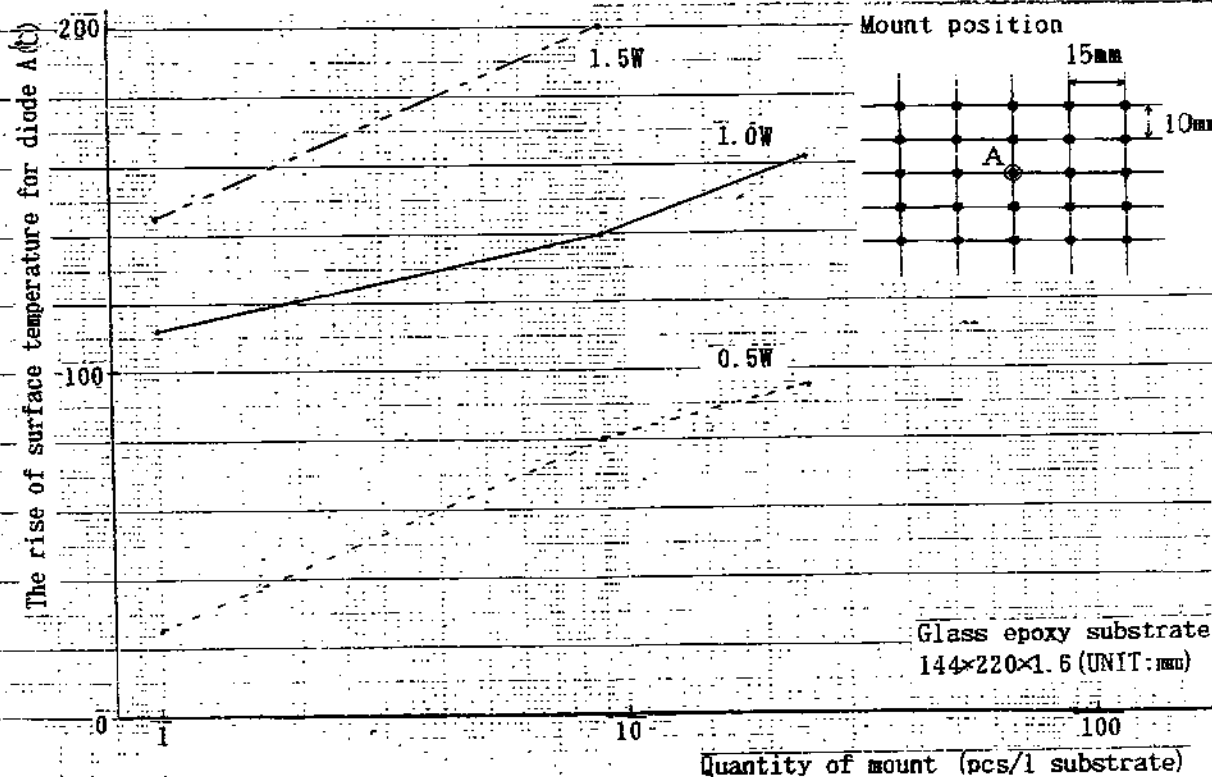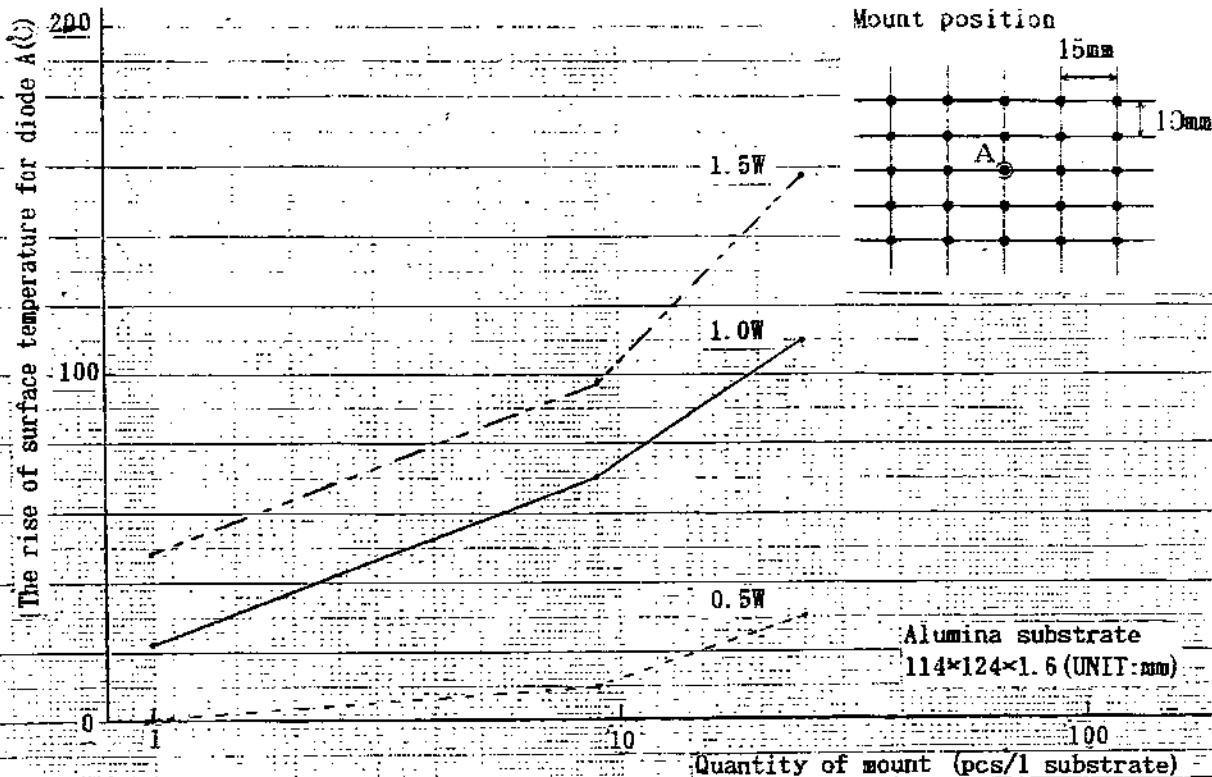

ROHM CO., LTD.

Date

2000.05.15

ROHM

Page of

Specification

Products

Type

The product described in this specification is designed to be used with ordinary electronic equipment or devices (such as audio-visual equipment, office-automation equipment, communications devices, electrical appliances, and electronic toys).

Should you intend to use this product with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

ROHM CO., LTD.

Date

ROHM

Page 1 of 1

Specification


Products POWER MOLD DIODE -S

Type TE25

1. SCOPE


This specification covers the tape packing requirements for power mold diode -S(The package style is PMDS). For individual diode the applicable specification shall be referred to.

2. COMPONENTS DESCRIPTION OF PMDS (UNIT:mm)

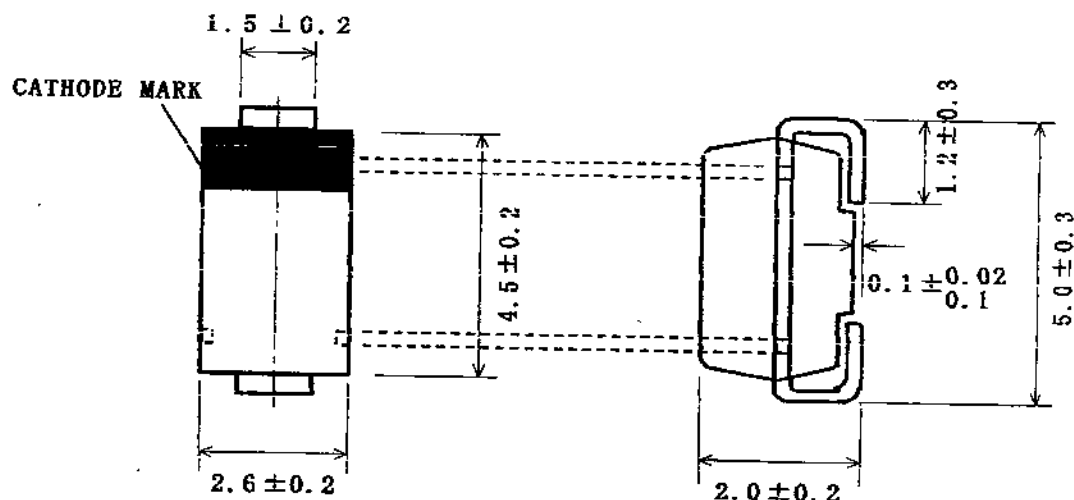

NOTE) The applicable specification describes in detail for individual diode. This figure is only for reference.

3. TAPING DIMENSION (UNIT:mm)

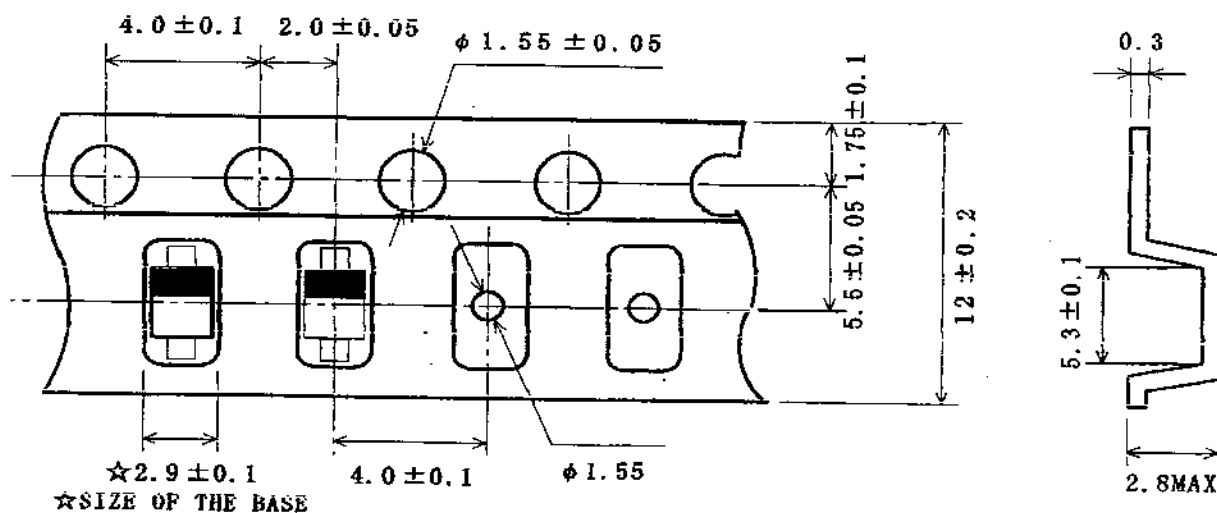

ROHM CO., LTD.

Design

Approval

Specification No.

TE25*011

Date

May 1999

ROHM

Page 2 of 2

Specification

Product POWER MOLD DIODE -S

Type TE25

4. TAPING PACKAGING SPECIFICATION

4-1 Direction of tape winding.

The direction shall be one in a reel.

4-2 Cumulative pitch tolerance.

The cumulative pitch tolerance of the mold for producing the carrier tape shall be within 0.2mm per 10 pitches.



4-3 The minimum radius to bend the carrier tape.

Carrier tape shall be flexible enough to protect from no component and damage under a minimum radius of 15mm. However, it shall be defined only inside of carrier tape.

4-4 The material of carrier tape.

Conductive brack

5. REEL DIMENSION (UNIT:mm)

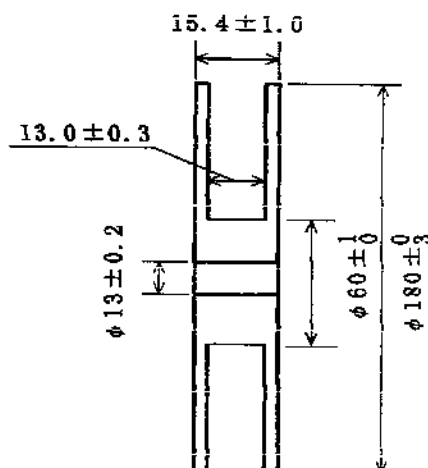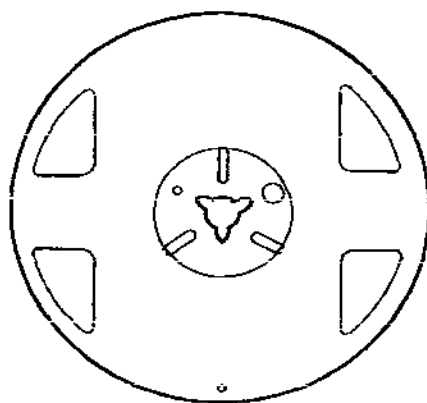

ROHM CO., LTD.

Date

May 10, 2000

ROHM

Page 2 of 4

Specification


Product POWER MOLD DIODE -S

Type TE25

6. REELING SPECIFICATION


2-1 Leading direction

Leading direction of carrier tape shall be indicated as below.

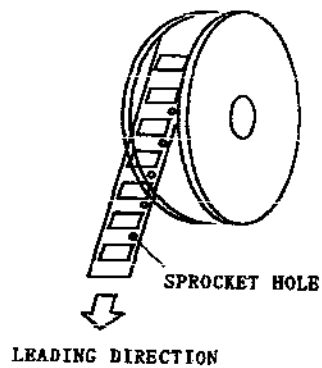


6-2 Leader (UNIT:mm)

Leader tape shall be separated into two parts - an adhesive tape at first part and carrier tape without products.

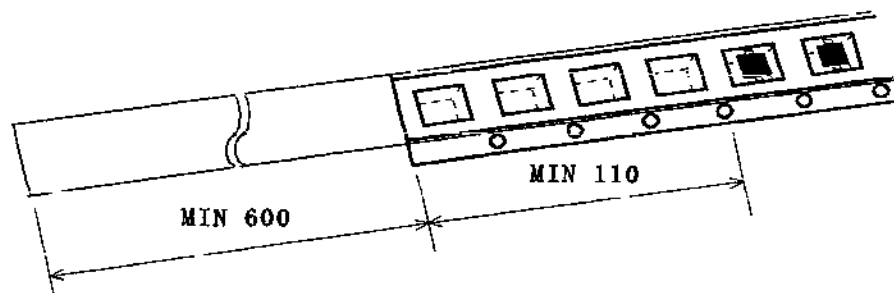

6-3 Trail (UNIT:mm)

Trail tape shall remain with no product and trail tape shall not be stuck directly on a reel.

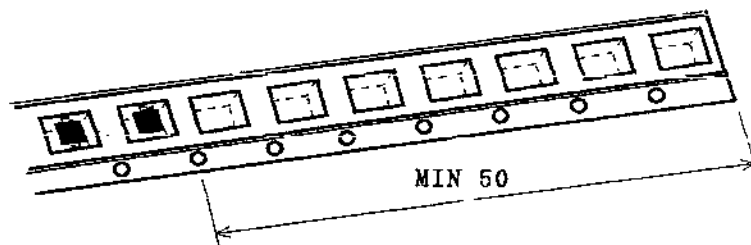

ROHM CO., LTD.

Date

May 10, 2000

ROHM

Page 4 of 4

Specification

Product POWER MOLD DIODE -S

Type TE 25

7. TYPE

Product code of taping shall be composed as indicated below.

EX: 1SR154-400 TE25
 Type code Taping code

EX: PTZ TE25 2.2B
 Type code Taping code Small classification
 of zener volt

8. Quantity

Quantity per one package is 1,500pcs.

9. Marking

Each reel shall be legibly marked with the following items.

1. Type
2. Quantity
3. Lot No.
4. Inspector No.
5. Trademark.


* Bar Code is displayed, too.

10. Package

The reel shall be packed in the paper case or plastic case.

11. Treatment for end of tape

The end of leader tape shall be fixed with the white adhesive tape.

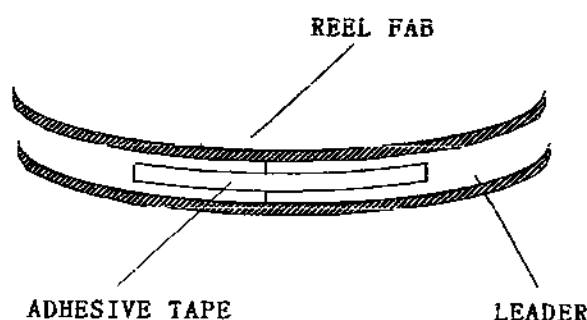

ROHM CO., LTD.

Date

M3 10/99

ROHM

Specification

Products

Part for automatic mounting

Type

< Missing parts >

Accordint to the automatic mounting, the number of missing part should be defined as the larger number whether less than 0.1% or 1 piece at a reel or a box.

However, the missing part should not be continuous.

ROHM CO., LTD.

Design

J. Matsubara

Approval

K. Tsuji

Specification No.

TAPE*001

Date

Oct/ 8/ 99

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PTZTE2515A](#) on WIN SOURCE

 [Rohm Semiconductor](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management