




\*\* Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE  
B

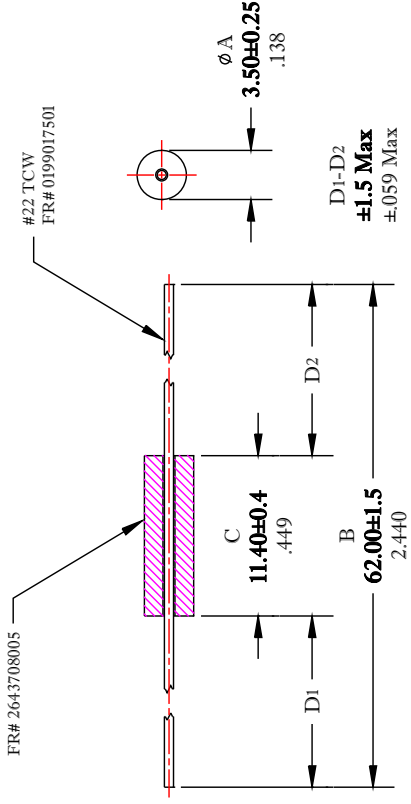

ELECTRICAL SPECIFICATIONS

IMPEDANCE (OHMS)	
25 MHz	100 MHz
93 Min.	144 Min.

DIMENSIONS  
**BOLD NUMBERS ARE IN MILLIMETERS**  
LIGHT NUMBERS ARE IN INCHES

NOTES:

- 1 - PARTS TO MEET FAIR-RITE PRODUCTS CORP. GENERIC VISUAL INSPECTION CRITERIA FOR SHIELD BEADS.
- 2 - IMPEDANCE MEASURED ON A HP4193A, USING AN 04193--87001 PROBE KIT WITH A WIRE LENGTH OF **25.4mm** [1"].
- 3 - PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55 SPECIFICATION FOR THERMAL SHOCK RESISTANCE.
- 4 - WIRE MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-57, SPECIFICATION FOR SOLDERABILITY.
- 5 - PART IS TAPED & REELED PER IEC 60286-1 & EIA RS296-F STANDARDS.

FR# 43

		TITLE		BEAD-01
DRAWN BY	DATE	SIZE		
D. FOOTE	12/27/2019	B		
CHKD BY				
APPRVD BY			SCAL	

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 2743008112 on WIN SOURCE](#)

 [FAIR-RITE PRODUCTS](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management