



**THE DATASHEET OF
LCP8S-10-5K**



SPECIFICATIONS

ELECTRICAL

- RESISTANCE RANGE (OHMS) ----- 1K,2K,5K,10K,20K,50K
- RESISTANCE TOLERANCE ----- ±15%
- LINEARITY,INDEPENDENT ----- ±2.0%
- RESOLUTION ----- ESSENTIALLY INFINITE
- ELECTRICAL STROKE ----- .433±.020
- OUTPUT SMOOTHNESS ----- 0.1% AGAINST INPUT VOLTAGE
- POWER RATING ----- 0.2WATT
- INSULATION RESISTANCE ----- 1000 MEGOHMS @ 500 VDC
- DIELECTRIC STRENGTH ----- 500 VAC MIN.

MECHANICAL


- MECHANICAL STROKE ----- .472
- STOP STRENGTH ----- APPROX. 2 POUNDS
- LIFE EXPECTANCY ----- 20,000,000 STROKES
- WEIGHT APPROX. ----- 0.2 OZS.
- MARKINGS ----- ETI SYSTEMS
- P/N LCP8-10
- RESISTANCE -----
- FRICITION ----- 30 GRAMS
- SPRING RETURN ----- RETRACTED, APPROX. 230GRAMS
- FORCE WHEN APPLICABLE ----- EXTENDED, APPROX. 57GRAMS

ENVIRONMENTAL

- SHOCK ----- 50G, 11mS
- VIBRATION ----- 10HZ TO 2000HZ 15G
- OPERATING TEMPERATURE RANGE ----- -30° C TO +105° C
- TEMPERATURE COEFFICIENT ----- ±400 PPM /°C

OPTIONS

- RESISTANCE TOLERANCE ----- ±10%
- LINEARITY,PRECISION ----- ±1%
- SPECIAL MACHINED SHAFT

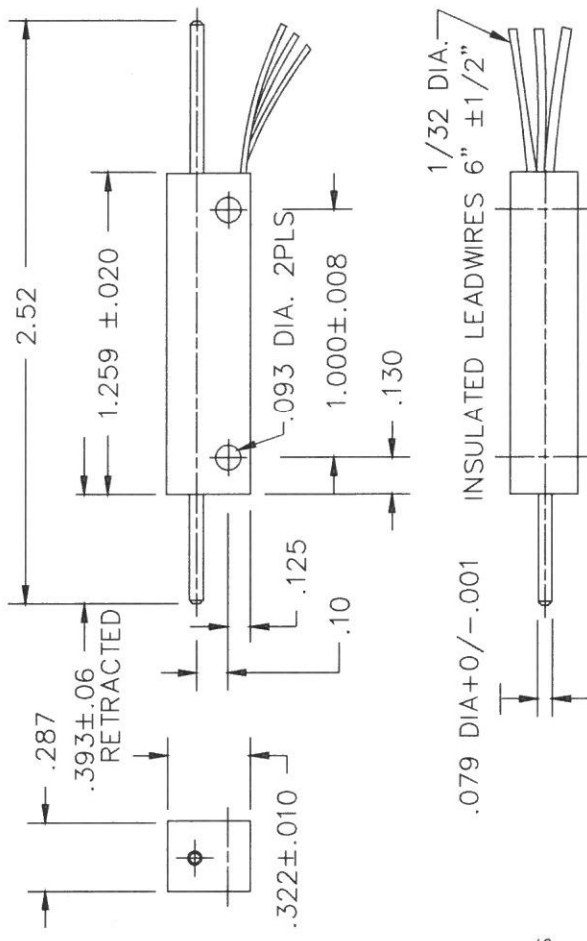

THIS DOCUMENT CONTAINS PROPRIETARY DATA OF POLARIS INDUSTRIAL ENTERPRISES, INC. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THERE OF MAY BE MADE EXCEPT BY WRITTEN PERMISSION.

ETI SYSTEMS CARLSBAD CALIFORNIA

PART NO. LCP8-10

SCALE	NONE
DATE:	12--76
BY	
APPRV'D	BT
CODE IDENT:	19477
TITLE	
LINEAR MOTION POTENTIOMETER	



TOLERANCES

- XX = +/- .010" FRACT. = +/- 1/64"
- XXX = +/- .005" ANGLES = +/- 1/2°

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View LCP8S-10-5K on WIN SOURCE](#)
-  [Manufacturer Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management