






**THE DATASHEET OF
H201CBC-Y/G**



ITEM	Q'TY	PART NUMBER	PART DESCRIPTION
1	1	H-201C	T-1 (3mm) Bi-Level LED Holder, 90° Mount
2	2	3BCXX	T-1 (3mm) N-Flange Bi-Color LED, See Page 2

REV.	DESCRIPTION
A	Engineering Update
B	Added Note for Blank
C	Engineering Update

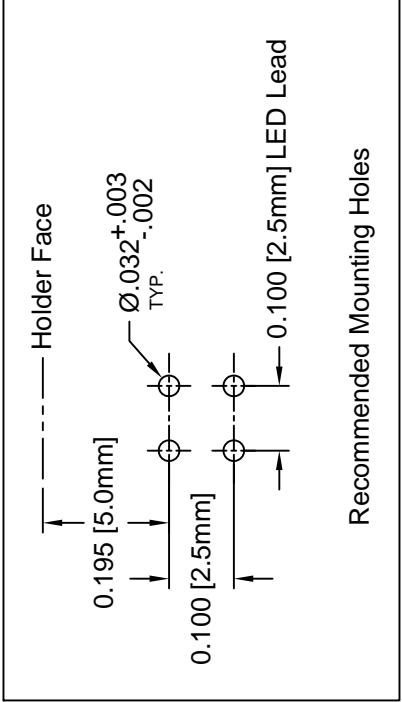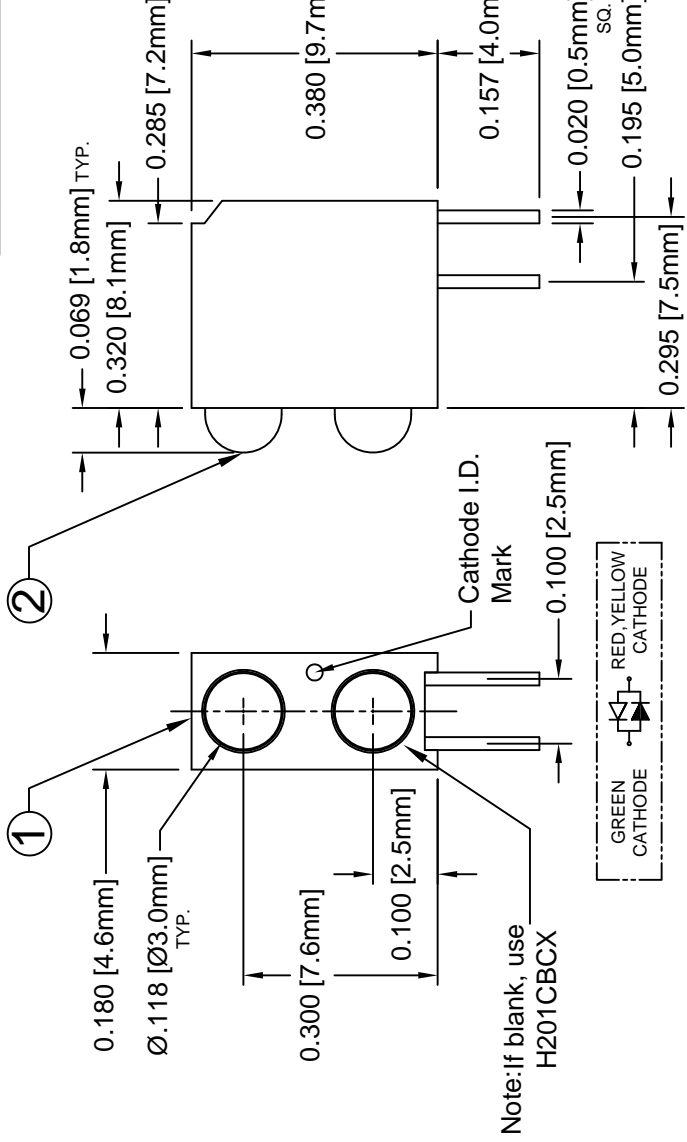

ABSOLUTE MAXIMUM RATINGS (Ta=25° C)

REVERSE VOLTAGE _____ 5V
 REVERSE CURRENT _____ 100uA
 OPERATING TEMPERATURE RANGE _____ -25° C - 85° C
 STORAGE TEMPERATURE _____ -30° C - 100° C
 LEAD SOLDERING TEMPERATURE (1/16" FROM BODY) _____ 260° C FOR 5 SECONDS

STANDARD TOLERANCES (UNLESS OTHERWISE SPECIFIED)	ANGULAR	°
DECIMALS	.X	±.1
	.XX	±.02
	.XXX	±.010
DESIGNED BY:	T. Yin	
DATE:	03/00	
CHECKED BY:	D. Green	
DATE:	03/00	

REV.	SEE SHEET #1

LED Assy No.	Peak Wave Length λ_p (nm)	Emitted Color	Lens Appearance	Absolute Max. Rating If (mA)	Electro-Optical Data @ 20m		
					Vf (V)		Iv (mA)
					TYP	MAX	TY
H201CBC	635	HE RED	WHITE DIFFUSED	30	2.0	2.6	30
	568	GREEN			2.2	2.6	30
H201CBC-Y/G	585	YELLOW	WHITE DIFFUSED	30	2.1	2.6	15
	568	GREEN			2.2	2.6	30

STANDARD TOLERANCES
(UNLESS OTHERWISE SPECIFIED)
±10% ALL VALUES



DESIGNED:	S. Irving	DATE:	03/0
CHECKED:	M. Chen	DATE:	03/0

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View H201CBC-Y/G on WIN SOURCE](#)

 [Bivar Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management