



**THE DATASHEET OF
DP4018N2M**



Data Sheet

Total Power: 40 Watts
Input Voltage: 90 - 264 Vac
 127 - 300 Vdc
of Outputs: Single



SPECIAL FEATURES

- Medical and ITE safeties
- Universal AC input
- Fully regulated output
- Overload and short circuit protection
- Constant voltage
- High efficiency
- High MTBF
- IEC320 AC input receptacle
3 pin (type C14) Class I
2 pin (type C8) Class II
- Built in EMI filter (CISPR 22 Class B)
- LED power good indicator
- Input power <49 watts
- Complies with EN61000-3-2
- Meets Energy Star Efficiency Level V
- CE Mark EMC, LVD & ErP 2011
- Less than 300 mW No-Load power consumption

SAFETY

- UL 60950-1, 60601-1
- cUL 60950-1, 60601-1
- TUV 60950-1, 60601-1
- CE EMC, LVD & ErP 2011
- CB Certificate and report
- CCC China Approval

Electrical Specifications

| Input | |
|-------------------------------|--|
| Input range | 90 - 264 Vac (wide range) 127 - 300 Vdc |
| Frequency | 47 - 63 Hz |
| Inrush current | < 50 A @ 230 Vac, cold start @ 25 °C |
| Input current | < 0.5 A rms @ 115 Vac; < 0.25 A @ 230 Vac |
| Efficiency | 84% @ full load typical, @115 Vac |
| EMI/RFI | FCC Part 15, Subpart B Class B & EN55022 (CISPR 22) Class B |
| Safety ground leakage current | 300 µA @ 50/60 Hz, 264 Vac input for 3 pin model 100 µA @ 50/60 Hz, 264 Vac input for 2 pin model |
| Output | |
| Maximum power (Po) | 40 W |
| Hold-up time | 10 ms. typical at full load @ 115 Vac |
| Overvoltage protection | 20% - 45% above nominal output maximum Latching type, recycle AC to reset. |
| Overload protection | Output short circuit protection auto recover Overload protected @ 110 - 160% above peak rating |
| Cable/connector | 1.2 m DC cable with 2.5 mm I.D, 5.5 mm O.D center plug DC plug center +v DC plug outer -v |

Environmental Specifications


| | |
|--------------------------------|---|
| Operating temperature | 0 ° to +40 °C ambient. Derate each output as 2.5% per degree from 40 °C to 60 °C. -20 °C start up |
| Storage temperature | -40 °C to +85 °C |
| Electromagnetic susceptibility | Designed to meet EN61000-4, -2, -3, -4, -5, -6, -8, -11, Level 3 |
| Humidity | Operating; non-condensing 10% to 90% RH |
| Vibration | Three orthogonal axes, 3 sweeps per axe at 1 oct/min. 2G peak 8 Hz to 500 Hz, operational |
| MTBF demonstrated | > 550,000 hours at full load and 25 °C ambient conditions |

Ordering Information

| Model Number | Output Voltage | Maximum Load | Peak Load ¹ | Regulation ² | Ripple P/P (PARD) ³ |
|--------------|----------------|--------------|------------------------|-------------------------|--------------------------------|
| DP4009N2M | 9 V | 4.44 A | 5.4 A | ± 8% | 90 mV |
| DP4009N3M | 9 V | 4.44 A | 5.4 A | ± 8% | 90 mV |
| DP4012N2M | 12 V | 3.33 A | 4.4 A | ± 5% | 120 mV |
| DP4012N3M | 12 V | 3.33 A | 4.4 A | ± 5% | 120 mV |
| DP4015N2M | 15 V | 2.67 A | 3.5 A | ± 5% | 150 mV |
| DP4015N3M | 15 V | 2.67 A | 3.5 A | ± 5% | 150 mV |
| DP4018N2M | 18 V | 2.22 A | 3.0 A | ± 5% | 150 mV |
| DP4018N3M | 18 V | 2.22 A | 3.0 A | ± 5% | 150 mV |
| DP4024N2M | 24 V | 1.67 A | 2.2 A | ± 5% | 240 mV |
| DP4024N3M | 24 V | 1.67 A | 2.2 A | ± 5% | 240 mV |
| DP4048N2M | 48 V | 0.84 A | 1.2 A | ± 5% | 480 mV |
| DP4048N3M | 48 V | 0.84 A | 1.2 A | ± 5% | 480 mV |

1. Peak current lasting < 15 seconds with a maximum 10% duty cycle.
2. At 25 °C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.
3. Peak-to-peak with 20 MHz bandwidth and 10 µF (tantalum capacitor) in parallel with a 0.1 µF capacitor at rated line voltage and load ranges.

Mechanical Drawing

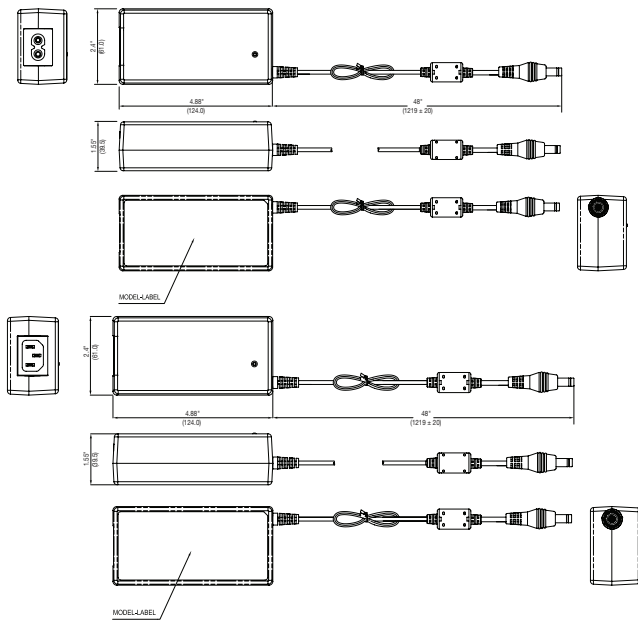

Notes:

1. Specifications subject to change without notice.
2. All dimensions in inches (mm), tolerance is ± 0.02" (± 0.5 mm)
3. Warranty: 2 year
4. Weight: 0.55 lb./.25 kg
5. AC input power cord sold separately.
6. Specifications are for convection rating at factory settings at 115 Vac input, 25 °C unless otherwise stated

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
 Tempe, AZ 85282
 USA
 +1 888 412 7832

Europe (UK)

Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX
 United Kingdom
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333



www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners.
 © 2015 Artesyn Embedded Technologies, Inc.

For more information: www.artesyn.com/power
 For support: productsupport.ep@artesyn.com

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View DP4018N2M on WIN SOURCE](#)

 [Manufacturer Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management