



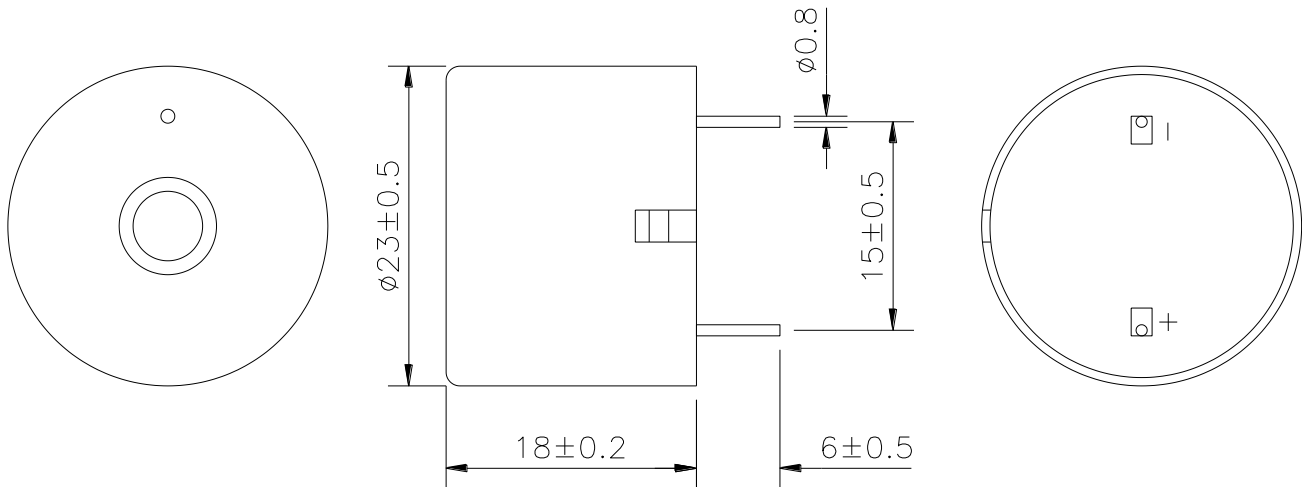
**THE DATASHEET OF
PK-20A25PQ**



Sales Outline DrawingRevision **B****May not be suitable for all medical and aerospace applications.****Specifications: Contact Mallory Sonalert to discuss your application.**

| | |
|----------------------------------|--|
| Oscillation Frequency (Hz) | 2500 ± 500 |
| Operating Voltage (Vdc) | 3 ~ 24 |
| Rated Voltage (Vdc) | 12 |
| Current Consumption (mA/max) | 25 at Rated Voltage |
| Sound Pressure Level (dB/min) | 95 at 30cm at Rated Voltage |
| Tone/Pulse Rate (Hz0) | Constant |
| Operating Temperature (°C) | -20 ~ +70 |
| Storage Temperature (°C) | -30 ~ +80 |
| Housing | ABS 757 UL94HB plastic resin (Color: Black) |
| Lead Pins | Tin Plated Brass |
| Weight (Grams) | 5.6 |
| Condition by wave soldering (°C) | 245 ±5 / 3±0.5 sec |
| Condition by hand soldering (°C) | 350 ±20 / within 5 sec |
| Options | For other options contact factory |

PS: Vp-p = 1/2duty, square wave

RoHS Compliant**Dimensions:** (units: mm)

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View PK-20A25PQ on WIN SOURCE](#)
- ⊖ [Mallory Sonalert Products Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management