



**THE DATASHEET OF  
CTLSH15-30M364 TR13 PBFREE**



CTLSH15-30M364

SURFACE MOUNT SILICON  
LOW  $V_F$   
SCHOTTKY RECTIFIER




www.centrasemi.com

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CTLSH15-30M364 is a high performance 15 Amp silicon Schottky rectifier designed for applications requiring high power capability and a low profile package.

**MARKING CODE: CTSH1530**

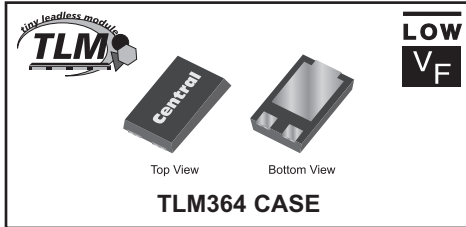

**APPLICATIONS:**

- DC-DC converters
- Reverse polarity protection
- By-pass diode

**FEATURES:**

- Low forward voltage,  $V_F=0.51V$  TYP @ 15A
- Low profile 1.2mm MAX package height

**MAXIMUM RATINGS:** ( $T_A=25^\circ C$ )

Peak Repetitive Reverse Voltage  
DC Blocking Voltage  
RMS Reverse Voltage  
Average Forward Current ( $T_L=120^\circ C$ )  
Peak Forward Surge Current,  $t_p=8.3ms$   
Operating and Storage Junction Temperature  
Thermal Resistance  
Thermal Resistance

SYMBOL		UNITS
$V_{RRM}$	30	V
$V_R$	30	V
$V_{R(RMS)}$	21	V
$I_O$	15	A
$I_{FSM}$	275	A
$T_J, T_{stg}$	-55 to +150	$^\circ C$
$\theta_{JA}$	110	$^\circ C/W$
$\theta_{JL}$	4.5	$^\circ C/W$

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^\circ C$  unless otherwise noted)


SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
$I_R$	$V_R=30V$		25	100	$\mu A$
$I_R$	$V_R=30V, T_A=125^\circ C$		20	50	mA
$BV_R$	$I_R=0.5mA$	30			V
$V_F$	$I_F=15A$		0.51	0.56	V
$C_J$	$V_R=4.0V, f=1.0MHz$		920		pF

R1 (25-March 2013)


**CTLSH15-30M364**  
**SURFACE MOUNT SILICON**  
**LOW  $V_F$**   
**SCHOTTKY RECTIFIER**




**TLM364 CASE - MECHANICAL OUTLINE**

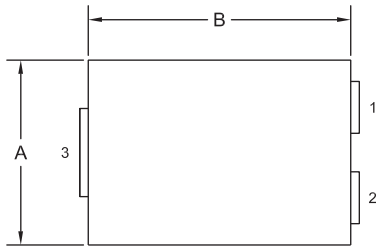

TOP VIEW

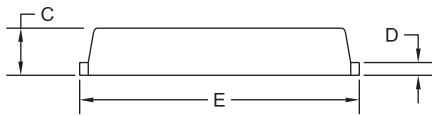

SIDE VIEW

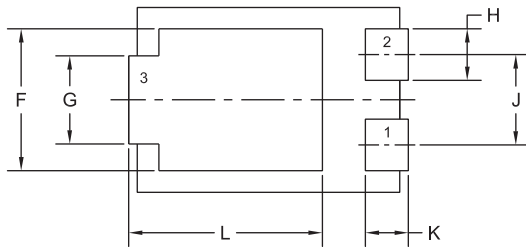


BOTTOM VIEW R0

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.167	0.172	4.25	4.35
B	0.238	0.243	6.05	6.15
C	0.039	0.048	1.00	1.20
D	0.009	0.014	0.25	0.35
E	0.250	0.262	6.35	6.65
F	0.128	0.136	3.25	3.45
G	0.076	0.085	1.95	2.15
H	0.044	0.052	1.10	1.30
J	0.083		2.10	
K	0.035	0.044	0.90	1.10
L	0.171	0.183	4.35	4.65

TLM364 (REV:R0)

**SUGGESTED MOUNTING PADS**  
(Dimensions in mm)

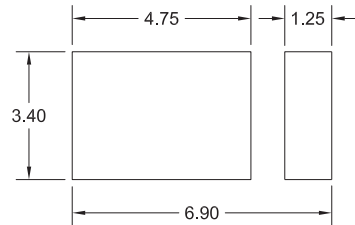

**LEAD CODE:**

- 1) Anode
- 2) Anode
- 3) Cathode

**MARKING CODE: CTSH1530**

R1 (25-March 2013)


CTLSH15-30M364

SURFACE MOUNT SILICON  
LOW  $V_F$   
SCHOTTKY RECTIFIER




TYPICAL ELECTRICAL CHARACTERISTICS


Leakage Current

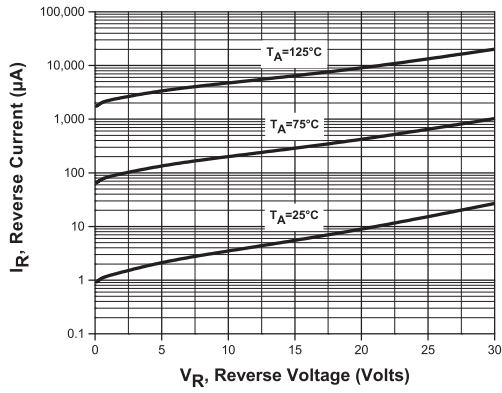


Forward Voltage

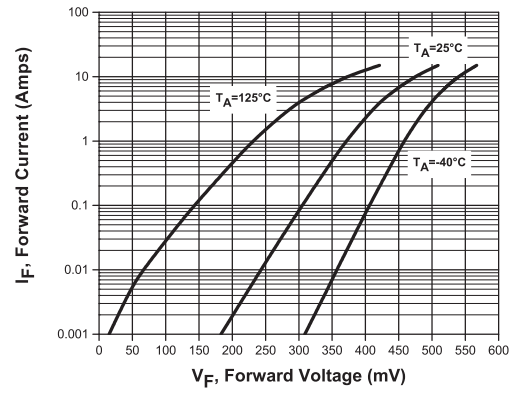

Capacitance

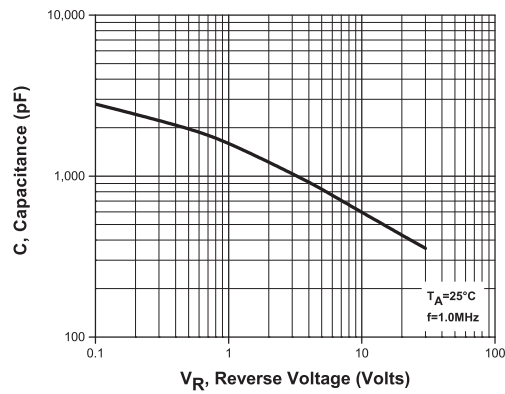


Current Derating

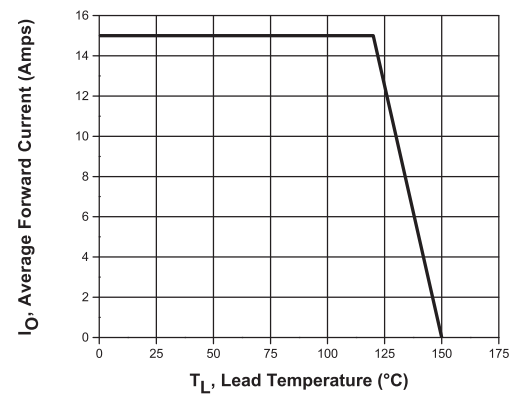


R1 (25-March 2013)

# Package Details

## TLM364 Case

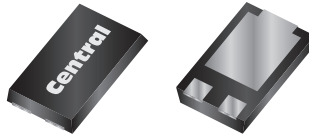


### Mechanical Drawing

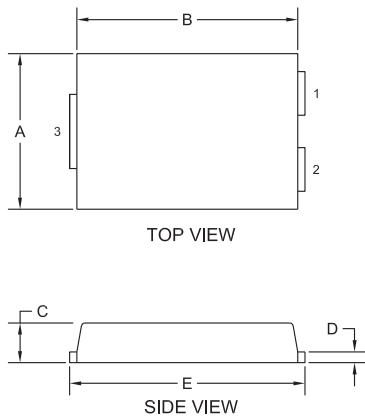

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.167	0.172	4.25	4.35
B	0.238	0.243	6.05	6.15
C	0.039	0.048	1.00	1.20
D	0.009	0.014	0.25	0.35
E	0.250	0.262	6.35	6.65
F	0.128	0.136	3.25	3.45
G	0.076	0.085	1.95	2.15
H	0.044	0.052	1.10	1.30
J	0.083		2.10	
K	0.035	0.044	0.90	1.10
L	0.171	0.183	4.35	4.65

TLM364 (REV:R0)

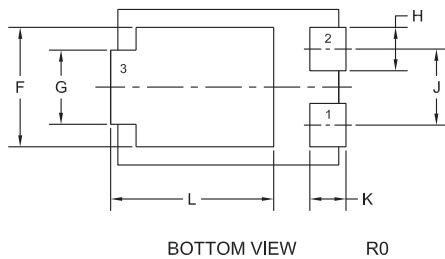


#### Part Marking:

7-8 Character Alpha/Numeric Code

#### Lead Code:

Reference individual device datasheet.

### Mounting Pad Geometry (Dimensions in mm)

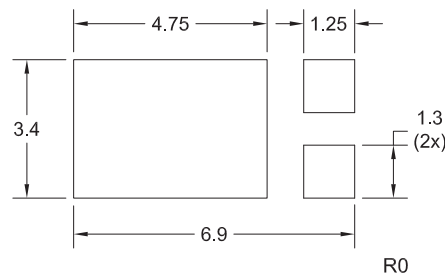


R0 (27-March 2013)

# Package Details

## TLM364 Case



### Tape Dimensions and Orientation (Dimensions in mm)

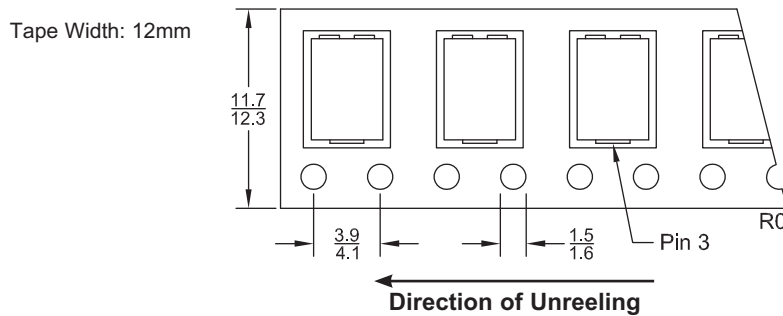

Devices are taped in accordance with Electronic Industries Association Standard EIA-481-D

### Packaging Base

13" Reel = 5,000 pcs.

### Reel Labeling Information

Each reel is labeled with the following information:

Central Part Number, Customer Part Number, Purchase Order Number, Quantity, Lot Number, Date Code, Ship Date and Marking Code.

### Reel Packing Information

Reel Size	Reels per Box (Maximum)	Parts per Box (Maximum)	Box Dimensions		Shipping Weight (Max.)	
			INCH	CM	LB	KG
13"	5	25,000	15x4x15	38x10x38	12	6
	14	70,000	15x15x9	38x38x23	32	15
	26	130,000	15x15x18	38x38x46	57	26


### Ordering Information

- For devices taped and reeled on 13" reels, add TR13 suffix to part number.
- All SMDs are available in small quantities for prototype and manual placement applications.

R0 (27-March 2013)

# Material Composition Specification

## TLM364 Case

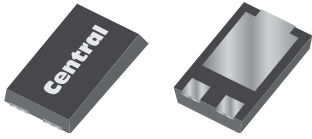

Device average mass . . . . . **92 mg**  
 Fluctuation margin . . . . . **+/-10%**

Component	Material	Material		Substance	CAS No.	Substance		
		(%wt)	(mg)			(%wt)	(mg)	(ppm)
active device	doped Si	10.41%	9.58	Si	7440-21-3	10.41%	9.58	104,130
clip	Cu alloy	5.36%	4.93	Cu	7440-50-8	5.21%	4.79	52,065
				Fe	7439-89-6	0.15%	0.14	1,522
leadframe	Cu alloy	32.72%	30.1	Cu	7440-50-8	32.66%	30.05	326,630
				Fe	7439-89-6	0.05%	0.05	543
die attach	high temperature solder paste	4.52%	4.16	Pb	7439-92-1	4.18%	3.85	41,848
				Sn	7440-31-5	0.23%	0.21	2,283
				Ag	7440-22-4	0.11%	0.1	1,087
encapsulation*	EMC GREEN	46.98%	43.22	silica	60676-86-0	36.17%	33.28	361,739
				epoxy resin	29690-82-2	4.70%	4.32	46,957
				phenol resin	9003-35-4	4.55%	4.19	45,543
				carbon black	1333-86-4	0.14%	0.13	1,413
				metal hydroxide	1309-42-8	1.41%	1.3	14,130
plating	matte tin	0.01%	0.01	Sn	7440-31-5	0.01%	0.01	109

\*EMC GREEN molding compound is Halogen Free.


**Disclaimer**

The information provided in this Material Composition data sheet is, to the best of our knowledge, correct. However, there is no guarantee to completeness or accuracy, as some information is derived from data sources outside the company.

R0 (11-January 2012)

# Material Composition Specification

## TLM364 Case

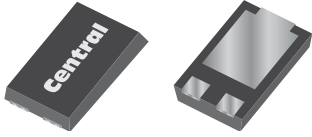

Device average mass . . . . . **92 mg**  
 Fluctuation margin . . . . . **+/-10%**

Component	Material	Material		Substance	CAS No.	Substance		
		(%wt)	(mg)			(%wt)	(mg)	(ppm)
active device	doped Si	10.41%	9.58	Si	7440-21-3	10.41%	9.58	104,130
clip	Cu alloy	5.36%	4.93	Cu	7440-50-8	5.21%	4.79	52,065
				Fe	7439-89-6	0.15%	0.14	1,522
leadframe	Cu alloy	32.72%	30.1	Cu	7440-50-8	32.66%	30.05	326,630
				Fe	7439-89-6	0.05%	0.05	543
die attach	high temperature solder paste	4.52%	4.16	Pb	7439-92-1	4.18%	3.85	41,848
				Sn	7440-31-5	0.23%	0.21	2,283
				Ag	7440-22-4	0.11%	0.1	1,087
encapsulation*	EMC GREEN	46.98%	43.22	silica	60676-86-0	36.17%	33.28	361,739
				epoxy resin	29690-82-2	4.70%	4.32	46,957
				phenol resin	9003-35-4	4.55%	4.19	45,543
				carbon black	1333-86-4	0.14%	0.13	1,413
				metal hydroxide	1309-42-8	1.41%	1.3	14,130
plating	matte tin	0.01%	0.01	Sn	7440-31-5	0.01%	0.01	109

\*EMC GREEN molding compound is Halogen Free.

**Disclaimer**

The information provided in this Material Composition data sheet is, to the best of our knowledge, correct. However, there is no guarantee to completeness or accuracy, as some information is derived from data sources outside the company.

R0 (11-January 2012)

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [⊖ View CTLSH15-30M364 TR13 PBFREE on WIN SOURCE](#)
- [⊖ Central Semiconductor Corp Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management