



THE DATASHEET OF IPD20N03LG



OptiMOS™ Buck converter series
Feature

- N-Channel
- Logic Level
- Excellent Gate Charge x $R_{DS(on)}$ product (FOM)
- 175°C operating temperature
- dv/dt rated
- Ideal for fast switching buck converters
- Pb.free lead plating, RoHS compliant





Type	Package	Marking
IPD20N03L G	PG-TO252-3	20N03L

Product Summary

V_{DS}	30	V
$R_{DS(on)}$	20	mΩ
I_D	30	A

PG-TO252-3


Maximum Ratings, at $T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Continuous drain current $T_C=25\text{ °C}$ $T_C=100\text{ °C}$	I_D	30 25	A
Pulsed drain current $T_C=25\text{ °C}$	$I_{D\text{ puls}}$	120	
Avalanche energy, single pulse $I_D=15\text{ A}$, $V_{DD}=25\text{ V}$, $R_{GS}=25\text{ }\Omega$	E_{AS}	15	mJ
Reverse diode dv/dt $I_S=30\text{ A}$, $V_{DS}=24\text{ V}$, $di/dt=200\text{ A}/\mu\text{s}$, $T_{j\text{max}}=175\text{ °C}$	dv/dt	6	kV/ μs
Gate source voltage	V_{GS}	± 20	V
Power dissipation $T_C=25\text{ °C}$	P_{tot}	42	W
Operating and storage temperature	T_j, T_{stg}	-55... +175	°C
IEC climatic category; DIN IEC 68-1		55/175/56	

Thermal Characteristics

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Characteristics					
Thermal resistance, junction - case	R_{thJC}	-	-	3.6	K/W
Thermal resistance, junction - ambient, leaded	R_{thJA}	-	-	100	
SMD version, device on PCB:	R_{thJA}				
@ min. footprint		-	-	75	
@ 6 cm ² cooling area ¹⁾		-	-	50	

Electrical Characteristics, at $T_j = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Static Characteristics					
Drain-source breakdown voltage $V_{GS}=0V, I_D=1mA$	$V_{(BR)DSS}$	30	-	-	V
Gate threshold voltage, $V_{GS} = V_{DS}$ $I_D=25\mu A$	$V_{GS(th)}$	1.2	1.6	2	
Zero gate voltage drain current $V_{DS}=30V, V_{GS}=0V, T_j=25^\circ\text{C}$ $V_{DS}=30V, V_{GS}=0V, T_j=125^\circ\text{C}$	I_{DSS}	-	0.01 10	1 100	μA
Gate-source leakage current $V_{GS}=20V, V_{DS}=0V$	I_{GSS}	-	1	100	nA
Drain-source on-state resistance $V_{GS}=4.5V, I_D=15A$	$R_{DS(on)}$	-	23.0	31	m Ω
Drain-source on-state resistance $V_{GS}=10V, I_D=15A$	$R_{DS(on)}$	-	15.3	20	

¹Device on 40mm*40mm*1.5mm epoxy PCB FR4 with 6cm² (one layer, 70 μm thick) copper area for drain connection. PCB is vertical without blown air.

Electrical Characteristics, at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Dynamic Characteristics						
Transconductance	g_{fs}	$V_{DS} \geq 2 \cdot I_D \cdot R_{DS(on)max}$, $I_D = 25\text{A}$	14	28	-	S
Input capacitance	C_{iss}	$V_{GS} = 0\text{V}$, $V_{DS} = 25\text{V}$, $f = 1\text{MHz}$	-	560	695	pF
Output capacitance	C_{oss}		-	230	280	
Reverse transfer capacitance	C_{rss}		-	62	93	
Gate resistance	R_G		-	1.3	-	Ω
Turn-on delay time	$t_{d(on)}$	$V_{DD} = 15\text{V}$, $V_{GS} = 10\text{V}$, $I_D = 15\text{A}$, $R_G = 12.7\Omega$	-	6.2	9.3	ns
Rise time	t_r		-	31	47	
Turn-off delay time	$t_{d(off)}$		-	23	34	
Fall time	t_f		-	18	27	

Gate Charge Characteristics


Gate to source charge	Q_{gs}	$V_{DD} = 15\text{V}$, $I_D = 15\text{A}$	-	2.5	3.1	nC
Gate to drain charge	Q_{gd}		-	6.4	9.6	
Gate charge total	Q_g	$V_{DD} = 15\text{V}$, $I_D = 15\text{A}$, $V_{GS} = 0$ to 5V	-	15	19	
Output charge	Q_{oss}	$V_{DS} = 15\text{V}$, $I_D = 15\text{A}$, $V_{GS} = 0\text{V}$	-	8	10	
Gate plateau voltage	$V_{(plateau)}$	$V_{DD} = 15\text{V}$, $I_D = 15\text{A}$	-	3.6	-	V

Reverse Diode

Inverse diode continuous forward current	I_S	$T_C = 25\text{ }^\circ\text{C}$	-	-	30	A
Inverse diode direct current, pulsed	I_{SM}		-	-	120	
Inverse diode forward voltage	V_{SD}	$V_{GS} = 0\text{V}$, $f = 30\text{A}$	-	1.1	1.4	V
Reverse recovery time	t_{rr}	$V_R = 15\text{V}$, $f = 5$, $di_f/dt = 100\text{A}/\mu\text{s}$	-	26	32	ns
Reverse recovery charge	Q_{rr}		-	13	16	nC

1 Power dissipation


$$P_{tot} = f(T_C)$$

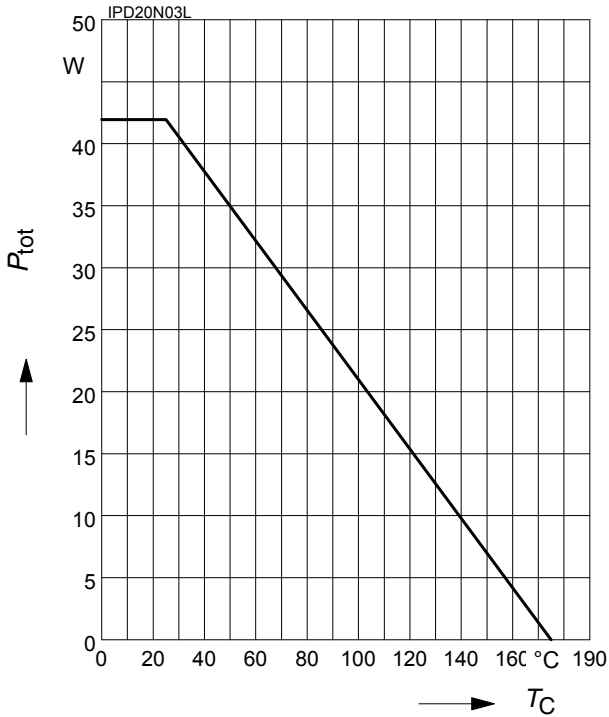

2 Drain current

$$I_D = f(T_C)$$


parameter: $V_{GS} \geq 10 \text{ V}$

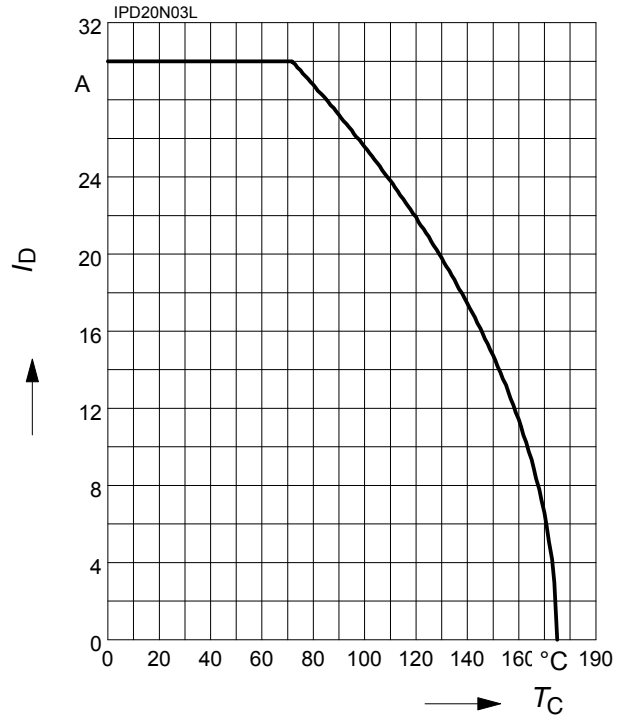

3 Safe operating area

$$I_D = f(V_{DS})$$


parameter: $D = 0$, $T_C = 25 \text{ °C}$

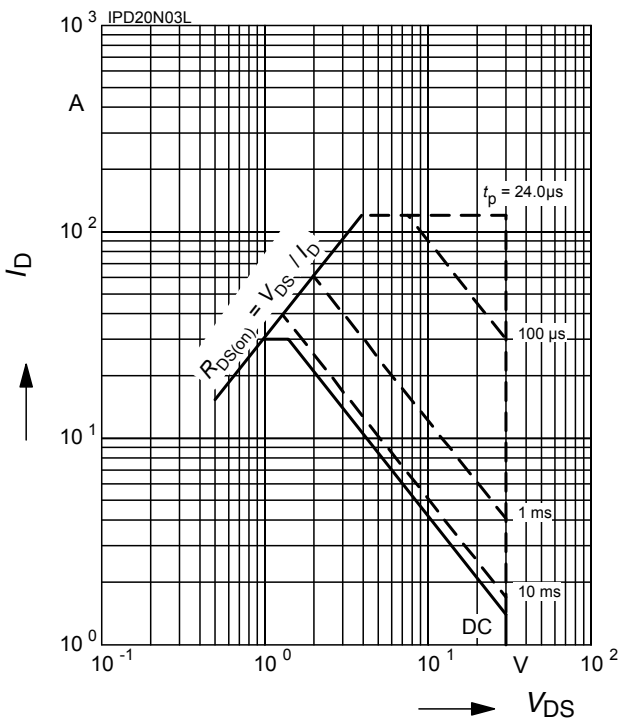

4 Transient thermal impedance

$$Z_{thJC} = f(t_p)$$


parameter: $D = t_p/T$

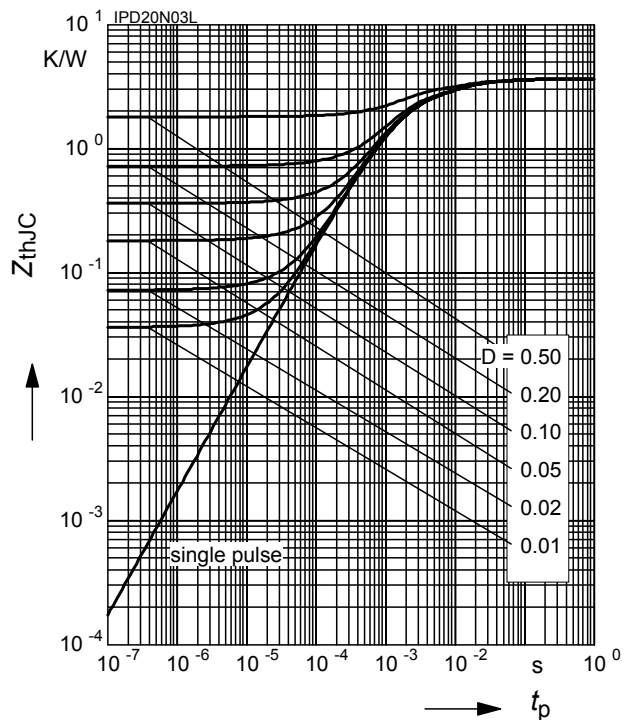

5 Typ. output characteristic

$I_D = f(V_{DS}); T_j = 25^\circ\text{C}$


parameter: $t_p = 80 \mu\text{s}$

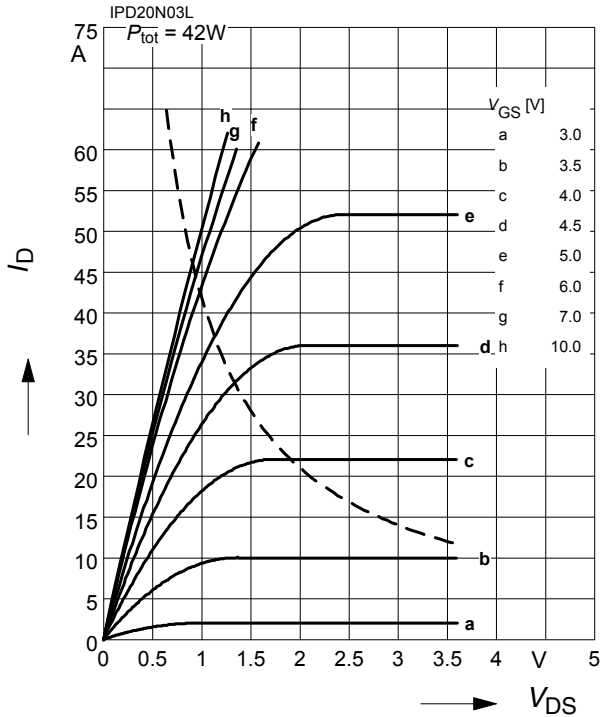

6 Typ. drain-source on resistance

$R_{DS(on)} = f(I_D)$


parameter: V_{GS}

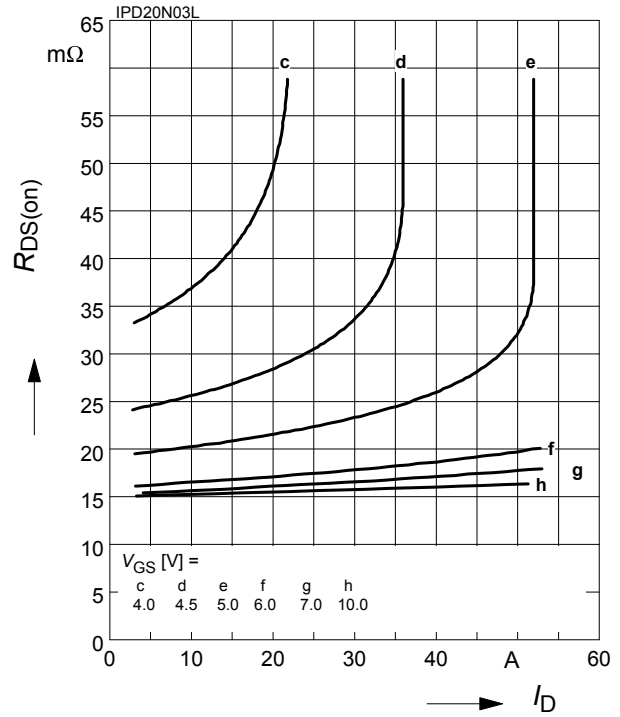

7 Typ. transfer characteristics

$I_D = f(V_{GS}); V_{DS} \geq 2 \times I_D \times R_{DS(on)max}$


parameter: $t_p = 80 \mu\text{s}$

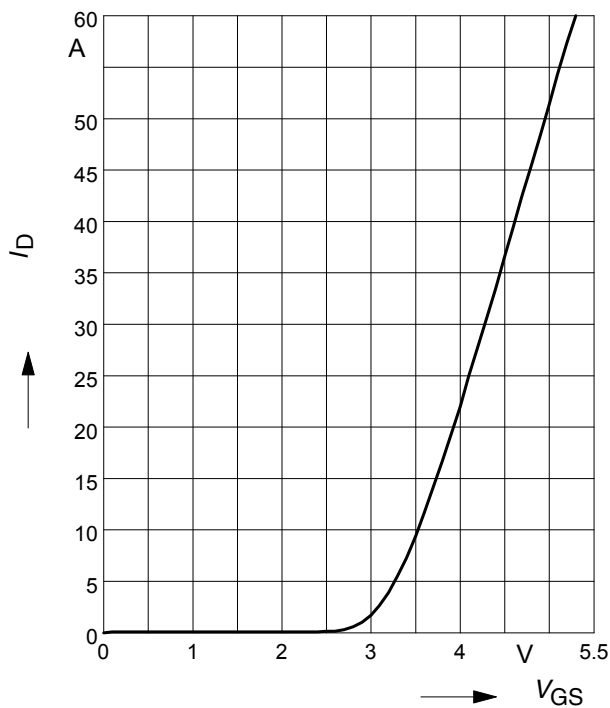

8 Typ. forward transconductance

$g_{fs} = f(I_D); T_j = 25^\circ\text{C}$


parameter: g_{fs}

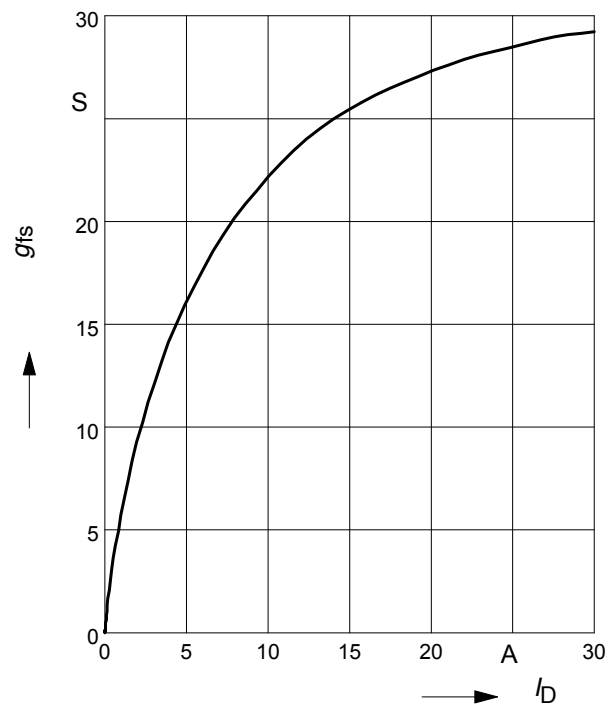

9 Drain-source on-state resistance

$$R_{DS(on)} = f(T_j)$$


parameter : $I_D = 15 \text{ A}$, $V_{GS} = 10 \text{ V}$

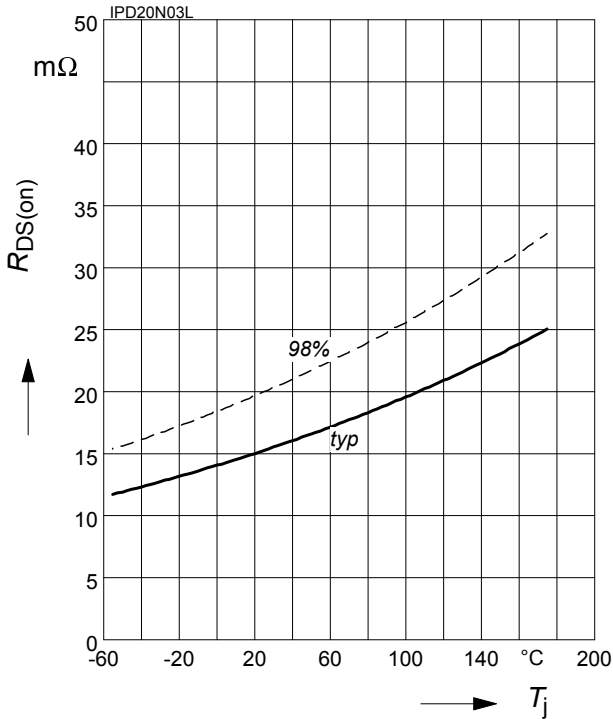

10 Gate threshold voltage

$$V_{GS(th)} = f(T_j)$$


parameter: $V_{GS} = V_{DS}$, $I_D = 25 \mu\text{A}$

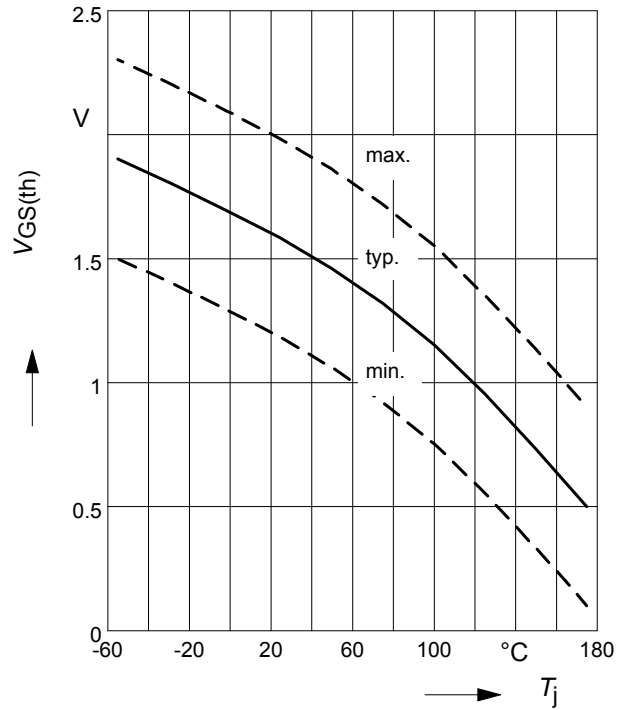

11 Typ. capacitances

$$C = f(V_{DS})$$


parameter: $V_{GS}=0\text{V}$, $f=1 \text{ MHz}$

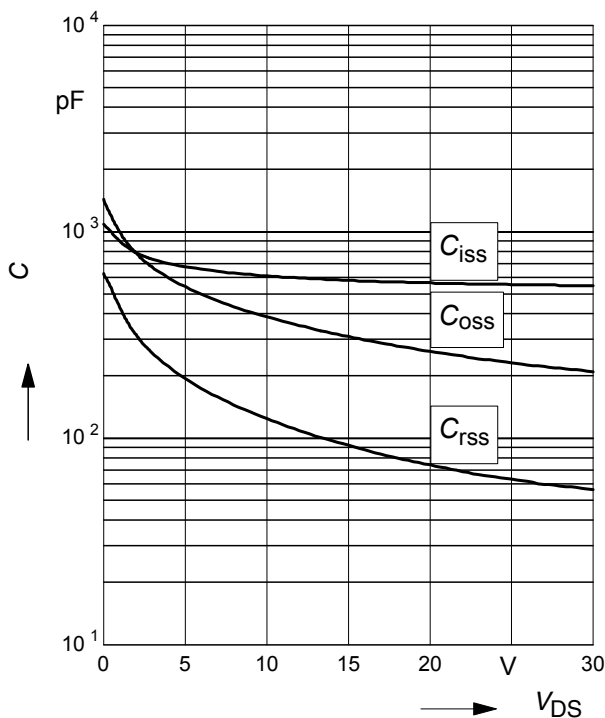

12 Forward character. of reverse diode

$$I_F = f(V_{SD})$$


parameter: T_j , $t_p = 80 \mu\text{s}$

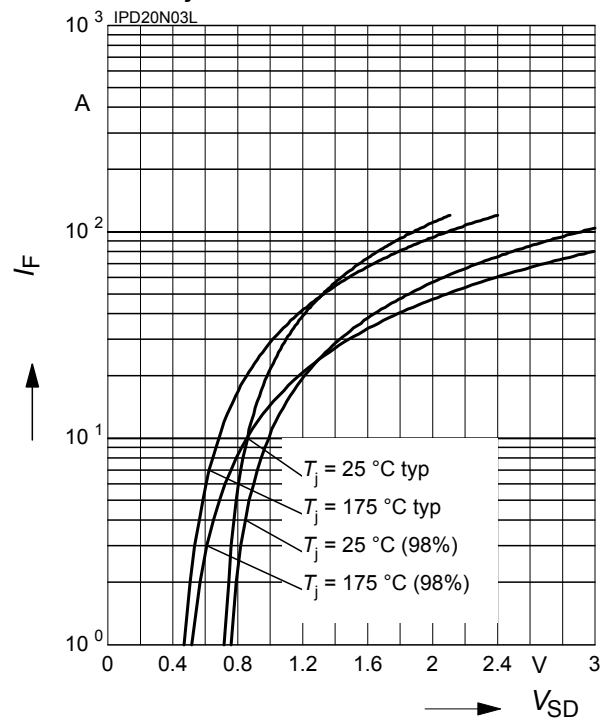

13 Typ. avalanche energy

$$E_{AS} = f(T_j)$$


par.: $I_D = 15\text{ A}$, $V_{DD} = 25\text{ V}$, $R_{GS} = 25\ \Omega$

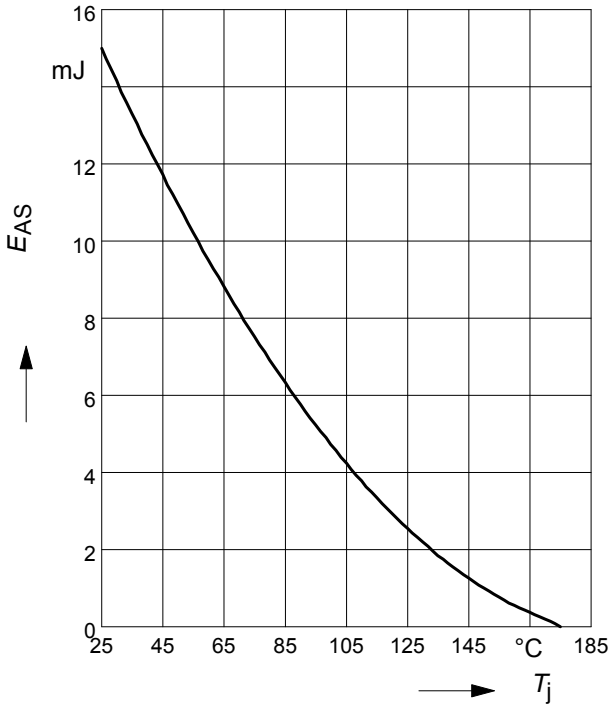

14 Typ. gate charge

$$V_{GS} = f(Q_{Gate})$$


parameter: $I_D = 30\text{ A}$ pulsed

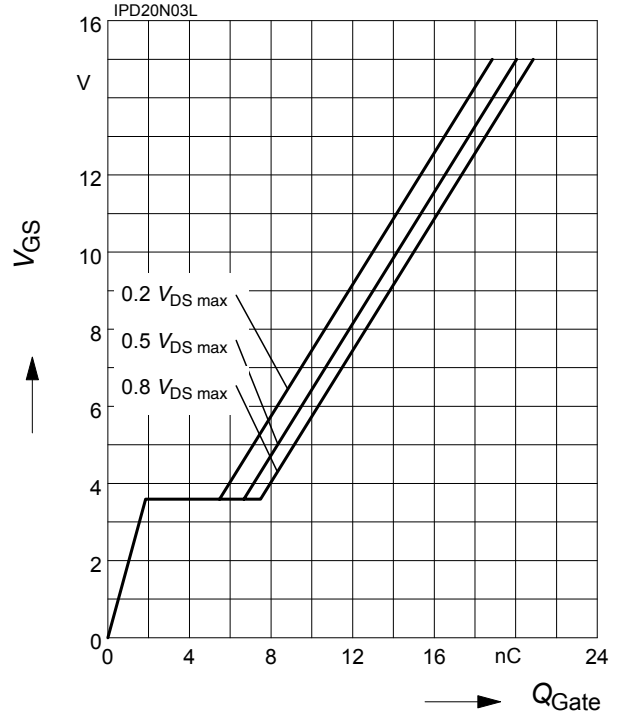


15 Drain-source breakdown voltage

$$V_{(BR)DSS} = f(T_j)$$

parameter: $I_D = 10\text{ mA}$

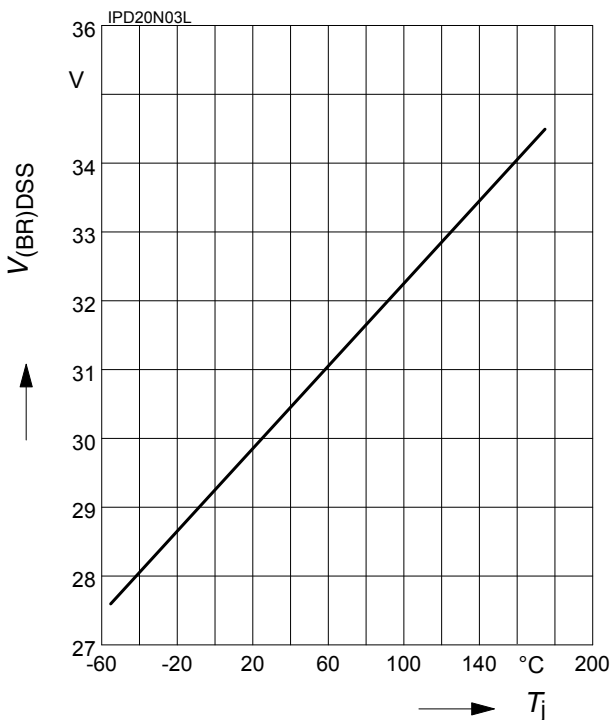

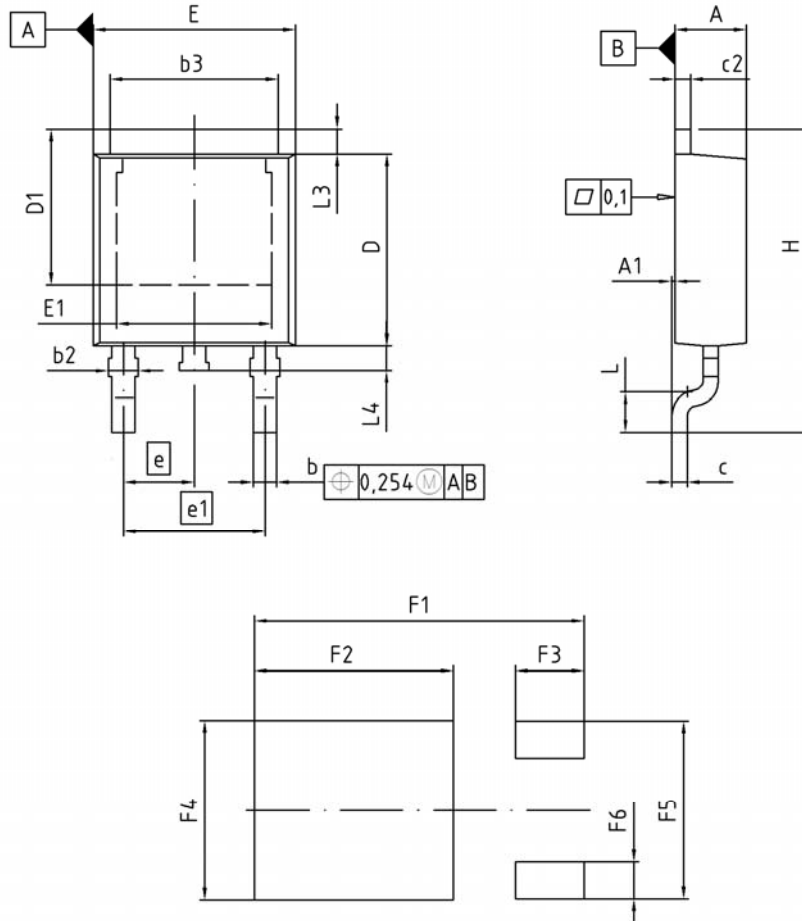

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.16	2.41	0.085	0.095
A1	0.00	0.15	0.000	0.006
b	0.64	0.89	0.025	0.035
b2	0.65	1.15	0.026	0.045
b3	5.00	5.50	0.197	0.217
c	0.46	0.60	0.018	0.024
c2	0.46	0.98	0.018	0.039
D	5.97	6.22	0.235	0.245
D1	5.02	5.84	0.198	0.230
E	6.40	6.73	0.252	0.265
E1	4.70	5.21	0.185	0.205
e	2.29		0.090	
e1	4.57		0.180	
N	3		3	
H	9.40	10.48	0.370	0.413
L	1.18	1.70	0.046	0.067
L3	0.90	1.25	0.035	0.049
L4	0.51	1.00	0.020	0.039
F1	10.50	10.70	0.413	0.421
F2	6.30	6.50	0.248	0.256
F3	2.10	2.30	0.083	0.091
F4	5.70	5.90	0.224	0.232
F5	5.66	5.86	0.223	0.231
F6	1.10	1.30	0.043	0.051

DOCUMENT NO.
Z8B00003328

SCALE

EUROPEAN PROJECTION

ISSUE DATE
19-10-2007

REVISION
03

Published by
Infineon Technologies AG
81726 Munich, Germany
© 2008 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office. Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View IPD20N03LG on WIN SOURCE](#)
- [Infineon Technologies Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management