




THE DATASHEET OF LC-6.0




ITEM	Q'TY	PART NUMBER	PART DESCRIPTION
1	1	FLP-LC	HOLDER CAP, FLEXIBLE LIGHT-PIPE
2	1	FLPS1022-X.XXX	LIGHT PIPE CABLE, CUT LENGTH IN INCHES

REV.	DESCRIPTION
H	FLP Length Update
J	FLP Length Clarification
K	Corrected "L" Dimension
M	Updated Fiber In BO
N	Added Note 2

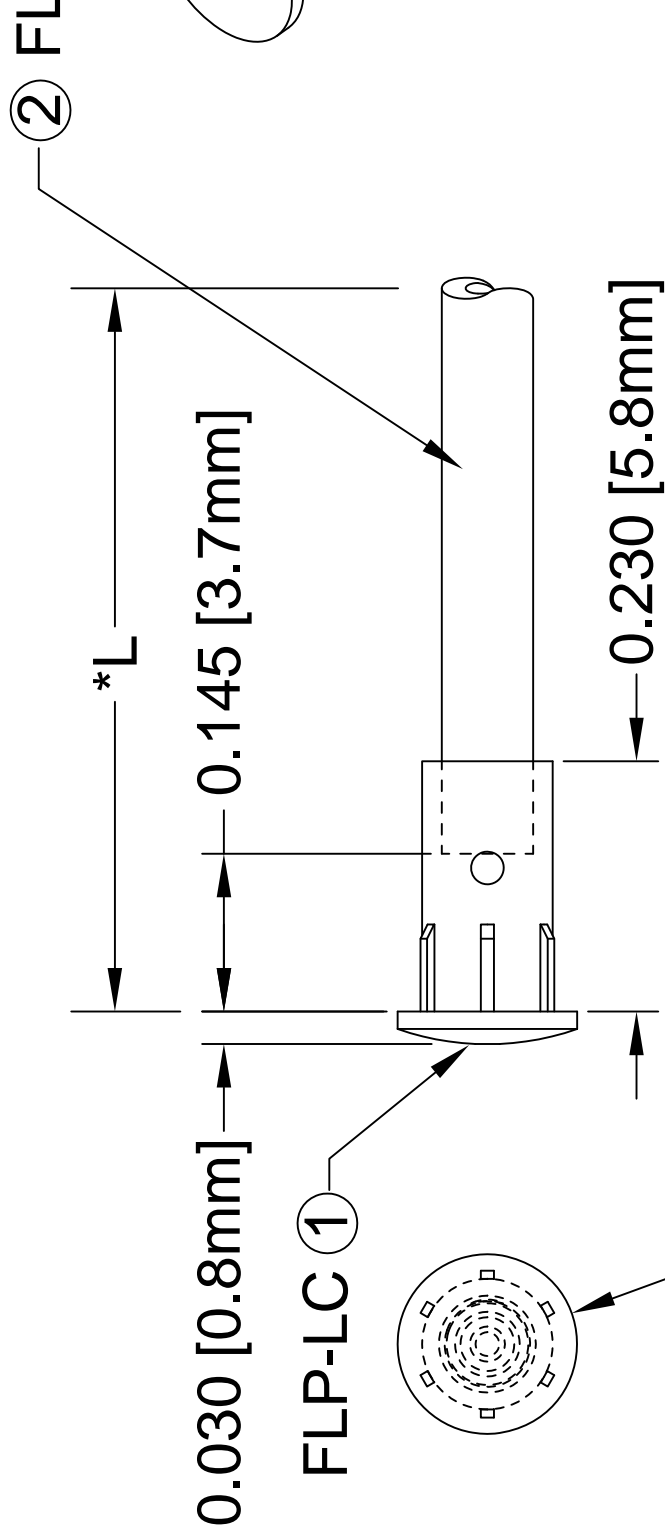

Ø.165 [Ø4.2mm]

" L "
0.750" ~ 16.000"
16.100" ~ 40.000"
40.100" ~ 80.000"
80.100" ~ 3,940.0'

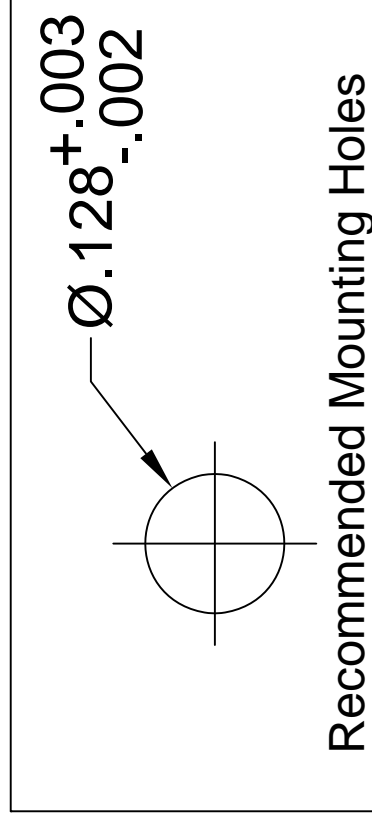


STANDARD TOLERANCES (UNLESS OTHERWISE SPECIFIED)		ANGULAR	
DECIMALS	FRACTIONS	X°	MINUS
.X	±.1		
.XX	±.02		
.XXX	±.010		
DESIGNED: S. Irving		DATE: 05/2/05	
CHECKED: M. Chen		DATE: 05/2/05	

- NOTE:
1. ALLOWABLE CUT LENGTH IS UP TO 3 DECIMAL PLACES.
 2. MINIMUM BEND RADIUS OF FLEXIBLE LIGHT PIPE: 0.87" [22mm].

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View LC-6.0 on WIN SOURCE](#)

 [Bivar Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management