



**THE DATASHEET OF  
XVC4B4K**



# Product data sheet

Specifications



Complete pre wired monolithic tower light, Harmony XVC, plastic, red orange green blue, 40mm, base mounting, steady, IP54, 24V AC DC

XVC4B4K

! To be discontinued

! To be discontinued on: May 31, 2026

## Main

Range of product	Harmony XVC4
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	4 illuminated units
Sound signalling	Without
Mounting diameter	40 mm
Component name	XVC
Device short name	XVC
Light source	LED steady red LED steady orange LED steady green LED steady blue
Supply circuit type	AC/DC

## Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94HB): top cover
Mounting location	On base
Product mounting	On base
[Us] rated supply voltage	24 V
[Us] rated supply voltage	24 V
Cable cross section	0.33 mm <sup>2</sup>
AWG gauge	AWG 22
Cable length	500 mm
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	100 mA
Flashing frequency	1 Hz
Net weight	0.16 kg
Height	205.5 mm

## Environment

<b>Standards</b>	IEC 61000-6-3 IEC 61000-6-2
<b>Product certifications</b>	UL
<b>Protective treatment</b>	TC
<b>Ambient air temperature for storage</b>	-35...70 °C
<b>Ambient air temperature for operation</b>	-10...50 °C
<b>Electrical shock protection class</b>	Class II conforming to IEC 61140
<b>Overvoltage category</b>	Class II conforming to IEC 61140
<b>IP degree of protection</b>	IP54 flat surface installation conforming to IEC 60529

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	6.5 cm
<b>Package 1 Width</b>	7.5 cm
<b>Package 1 Length</b>	46.5 cm
<b>Package 1 Weight</b>	302.0 g
<b>Unit Type of Package 2</b>	S04
<b>Number of Units in Package 2</b>	15
<b>Package 2 Height</b>	30.0 cm
<b>Package 2 Width</b>	40.0 cm
<b>Package 2 Length</b>	60.0 cm
<b>Package 2 Weight</b>	5.886 kg

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Total lifecycle Carbon footprint	20
----------------------------------	----

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
--	-----

Packaging without single use plastic	Yes
--------------------------------------	-----

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

California proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## Use Again

### Repack and remanufacture


Take-back	No
-----------	----

Dimensions Drawings

Pre-assembled and Pre-wired Tower Light

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

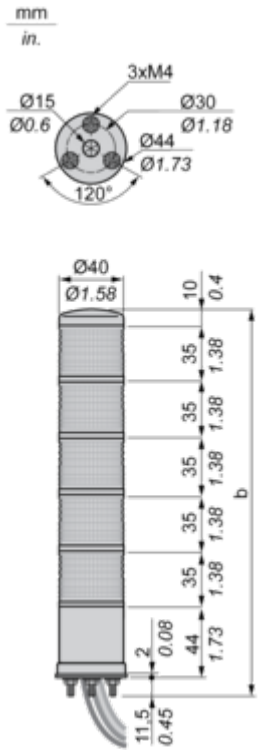

No. of illuminated units	b Without buzzer (mm)	b Without buzzer (in)
1 stage	100.50	3.96
2 stages	135.50	5.33
3 stages	170.50	6.71
4 stages	205.50	8.09
5 stages	240.50	9.47


Mounting and Clearance

**Pre-assembled and Pre-wired Tower Light**

---

**Direct Mounting on Horizontal Support**

Panel cut-out





## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View XVC4B4K on WIN SOURCE](#)

 [Schneider Electric](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management