



THE DATASHEET OF ZXLD1374QEV1

NTC probes Stainless Part number 89750182



- Direct connection with no converter on analog input
- Easy-to-use and low-cost temperature control solution
- Fields of application : HVAC, compressors, geothermal systems, swimming pools, fountains
- Analog input configured as a potentiometer via the NTC functions in the M3 Soft (minimum AC 5)

Part numbers

	Type	Description	Ohmic value	Measurement range
89750182	Stainless	NTC2 probe stainless 305 for Millenium 3 (24 V DC, $\pm 10\%$)	10 k Ω @ 25 °C	-35 → +120 °C

Specifications

General characteristics

Environmental characteristics

Operating temperature	-25 → +85 °C	-25 → +85 °C	-25 → +120 °C	-20 → +105 °C	-40 → +200 °C
Storage temperature	-30 → +100 °C	-30 → +100 °C	-40 → +180 °C	-40 → +105 °C	-40 → +200 °C
Accuracy	-25 → +40 °C : $\leq \pm 0,8$ °C (repeatability $\leq \pm 0,5$ °C) +40 → +70 °C : $\leq \pm 2$ °C (repeatability $\leq \pm 1$ °C) +70 → +85 °C : $\leq \pm 3$ °C (repeatability $\leq \pm 2$ °C)	-25 → +40 °C : $\leq \pm 0,8$ °C (repeatability $\leq \pm 0,5$ °C) +40 → +50 °C : $\leq \pm 1,2$ °C (repeatability $\leq \pm 1$ °C) +50 → +60 °C : $\leq \pm 1,4$ °C (repeatability $\leq \pm 1,4$ °C) +60 → +70 °C : $\leq \pm 2$ °C (repeatability $\leq \pm 2$ °C) +70 °C → +85 : $\leq \pm 3$ °C (repeatability $\leq \pm 2$ °C)	-35 → +40 °C : $\leq \pm 0,8$ °C (repeatability $\leq \pm 0,5$ °C) +40 → +70 °C : $\leq \pm 2$ °C (repeatability $\leq \pm 1$ °C) +70 → +120 °C : $\leq \pm 3$ °C (repeatability $\leq \pm 2$ °C)	-20 → +40 °C : $\leq \pm 0,8$ °C (repeatability $\leq \pm 0,5$ °C) +40 → +70 °C : $\leq \pm 2$ °C (repeatability $\leq \pm 1$ °C) +70 → +105 °C : $\leq \pm 3$ °C (repeatability $\leq \pm 2$ °C)	0 → +40 °C : $\leq \pm 3$ °C (repeatability $\leq \pm 1$ °C) +40 °C → +140 °C : $\leq \pm 2$ °C (repeatability $\leq \pm 1$ °C) +140 °C → +180 °C : $\leq \pm 3$ °C (repeatability $\leq \pm 1$ °C)

Mechanical characteristics

Material	PVC	AS	Inox	POM (polyoxymethylene)	Silicone
Cable	PVC	2 wires	PVC (105 °C max.)	PVC (105 °C max.)	Silicone (200 °C max.)
Cable length	3000 mm	600 mm	3000 mm	3000 mm	800 mm
Protection rating	IP67	-	IP64	IP67	IP64
Isolation class	-	-	1	2	1
Dielectric strength according to IEC 335	-	1000 V AC / 1 mn	1250 V AC / 1 mn	-	2000 V AC / 1 mn
Dimensions	Threading 1/2" Length 68 mm	5 x 6 mm Length 15 mm	Ø 4,8 Length 30 mm	Ø 6 mm Length 30 mm	Ø 5 Length 30 mm


Comments

Accessories

Accessories	Operating temperature	Operating pressure	Code
Copper protective sleeve	-20 → +100 °C	10 bar	89750146
316 stainless steel protective sleeve	-20 → +400 °C	16 bar	89750147

Dimensions (mm)


89750182

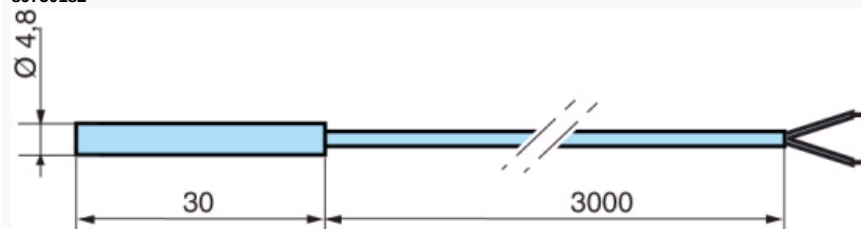

Connections

CA 89750183

⚠ 24V +/- 10%

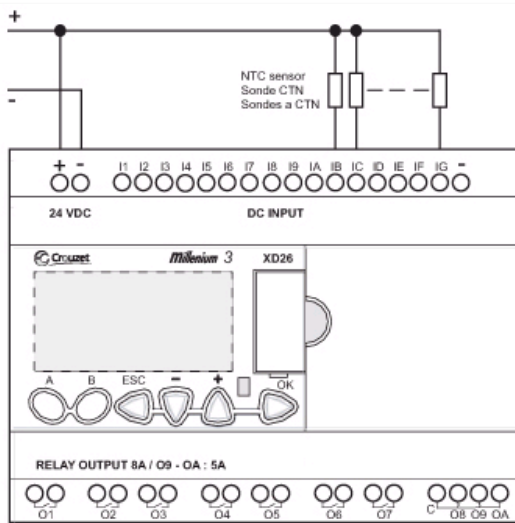

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View ZXLD1374QEV1](#) on WIN SOURCE

 [Diodes Incorporated](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management