






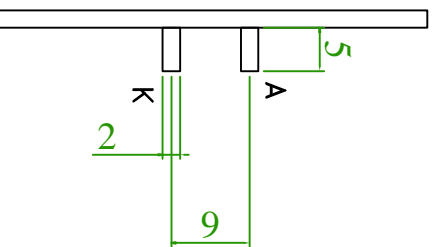


THE DATASHEET OF
4882

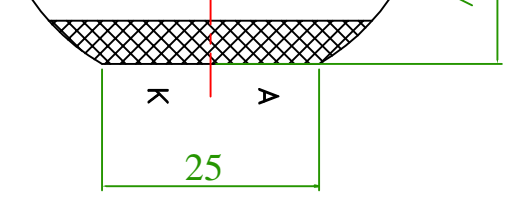


3 4 5 6 8



- Notes:
1. LED Type: 2 SMD LED ;
 2. Color: White 6000K-7500K ;
 3. Supply Voltage: DC 3.0V ;
 4. Supply Current: IF= 15mA*2 ;
 5. Luminous Intensity: 80 cd/m2 .

-  ALF (Aluminium Foil)
-  E.L.A. (Effective Light Area)
-  D.S.T. (Double Side Tape)



TYPE	TYPE	MATERIAL	SCALE	APPROVED
类型	背光源 (BACKLIGHT)	材质	比例	承认
LUCKYLIGHT PART NO	KWB-C50-P2W	PMMA	1:1	CHECK
佳光料号		A.0	日期	核对
CUSTOMER PART NO		±0.30 MM	PAGE	DESIGNED
客户料号			1	设计

3 4 5 6 7 8

A



B

C

D

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 4882 on WIN SOURCE](#)
-  [Pololu Corporation](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management