




## 32.768kHz Ceramic SMD Crystal Oscillator

### Description

Abrakon's ASEK series is a low power 32.768 kHz crystal oscillator within a 3.2 mm x 2.5 mm x 1.2 mm package. This series offers various supply voltage options at 1.8V, 2.5V and 3.3V. The ASEK delivers a CMOS output with a  $\pm 20$  ppm frequency tolerance. This series has an output enable/disable feature, with a low 5  $\mu$ A typical disable current.



### Features

- Optimized for low current consumption
- Output Enable/Start & Disable/Stop function
- Output waveform CMOS/LVCMOS compatible
- Hermetically seam-sealed ceramic package
- REACH/RoHS II Compliant | MSL Level 1
- Pb free


### Typical Applications

- Portable & wearable electronics
- Internet of Things (IoT)
- Consumer electronics
- Industrial control & automation
- Mobile communication

### Electrical Specifications

Parameters		Min.	Typ.	Max.	Unit	Notes
Frequency		32.768			kHz	
Operating Temperature Range		0		+70	°C	See options
Storage Temperature Range		-55.0		+125	°C	
Overall Frequency Stability <sup>[Note 1]</sup>		-100		+100	ppm	See options
Supply Voltage (Vdd)		2.97	3.30	3.63	V	See options
Tri-state function		:Logic "1" or Open: Oscillation; Logic "0" (VIL<0.8 Vdd): Hi Z			V	
Output Load				15	pF	CMOS
Output Voltage	V <sub>OH</sub>	0.9*Vdd			V	
	V <sub>OL</sub>			0.1*Vdd		
Aging 1 year @25°C± 3°C		-3.0		+3.0	ppm	
Symmetry @ ½ Vdd		40		60	%	See options
Start-up Time			24	28	ms	
Rise and Fall Time (Tr/Tf) @10%Vdd-90%Vdd, 15pF load			40	50	ns	
Disable Current				10	μA	
Supply Current (Idd) @25°C± 3°C	Vdd = 3.3V		1.7	3.5	mA	
	Vdd = 2.5V		1.2	2.5		
	Vdd = 1.8V		0.8	1.5		


**Part Identification**

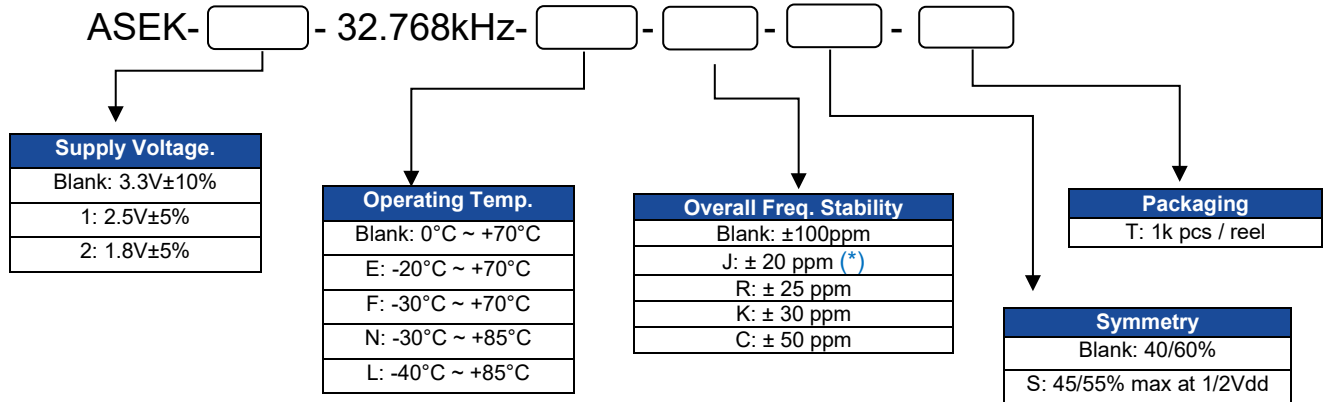


\* For Temp option E, F, N and 0° C to +70° C only

# 32.768kHz Ceramic SMD Crystal Oscillator

## Mechanical Dimensions

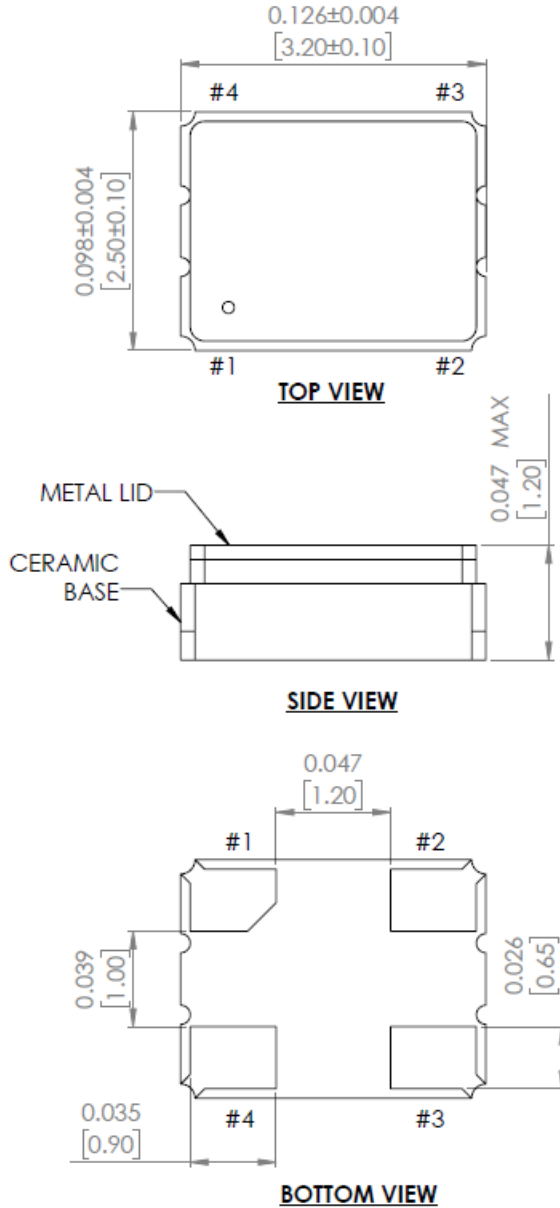

### Recommended Land Pattern

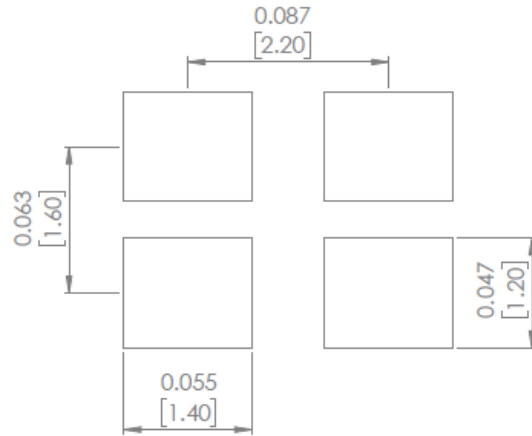

Pin #	Function
1	INH
2	GND
3	Output
4	Vdd

INH Function	
#1	#3 (Output)
Open	Active
"H" Level	Active
"L" Level	High Z (No Oscillation)

Note 2:  
Recommended to use approximately 0.01µF bypass capacitor between PIN 2 and PIN 4

Dimensions: inches (mm)

Reflow Profile [JEDEC J-STD-020]

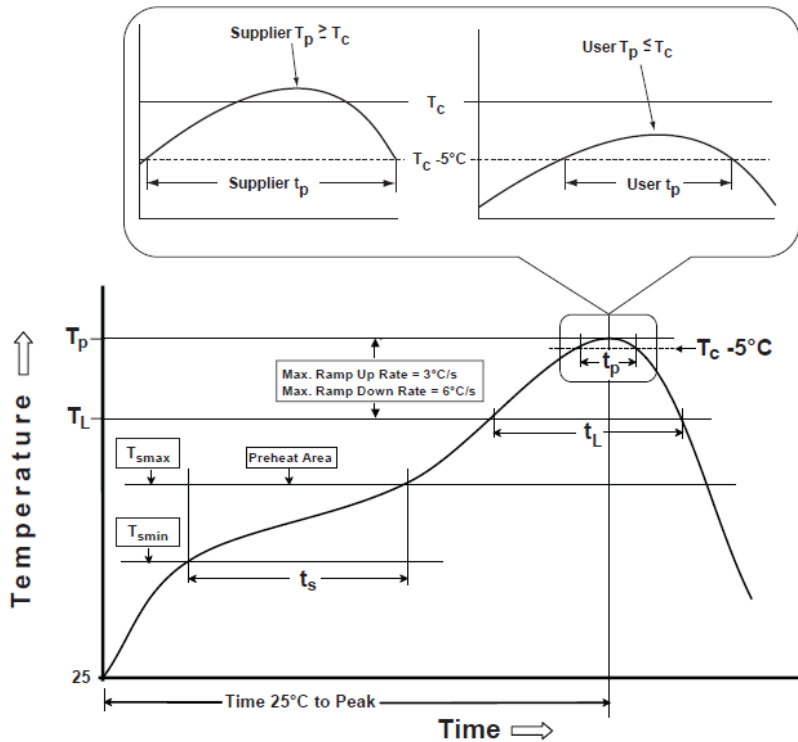


Table 1

SnPb Eutectic Process Classification Temperatures ( $T_c$ )		
Package Thickness	Volume $mm^3$ <350	Volume $mm^3$ $\geq$ 350
<2.5 mm	235 °C	220 °C
$\geq$ 2.5 mm	220 °C	220 °C

Table 2

Pb-Free Process Classification Temperatures ( $T_c$ )			
Package Thickness	Volume $mm^3$ <350	Volume $mm^3$ 350-2000	Volume $mm^3$ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 mm - 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat / soak		
Temperature minimum ( $T_{smin}$ )	100°C	150°C
Temperature maximum ( $T_{smax}$ )	150°C	200°C
Time ( $T_{smin}$ to $T_{smax}$ ) ( $t_s$ )	60 - 120 sec.	60 - 120 sec.
Average ramp-up rate ( $T_{smax}$ to $T_p$ )	3°C/sec. max	3°C/sec. max
Liquidous temperature ( $T_L$ )	183°C	217°C
Time at liquidous ( $t_L$ )	60 - 150 sec.	60 - 150 sec.
Peak package body temperature ( $T_p$ )*	see Table 1	see Table 2
Time ( $t_p$ )** within 5°C of the specified classification temperature ( $T_c$ )	20 sec.	30 sec.
Ramp-down rate ( $T_p$ to $T_{smax}$ )	6°C/sec. max	6°C/sec. max
Time 25°C to peak temperature	6 min. max	8 min. max
Reflow cycles	2 max	2 max


\*Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum.

\*\*Tolerance for time at peak profile temperature ( $t_p$ ) is defined as supplier minimum and a user maximum.

# 32.768kHz Ceramic SMD Crystal Oscillator


## Packaging

T: 1,000pcs/reel

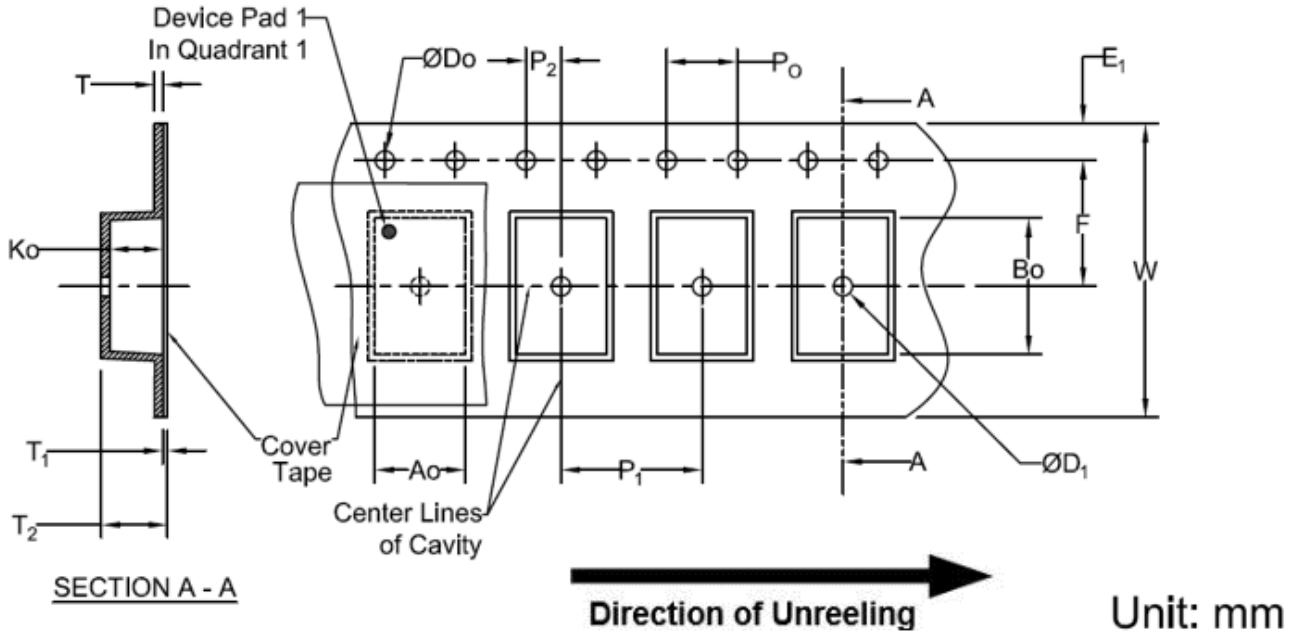

Tape Specifications (mm)							
Width	Ao	Bo	Do	D <sub>1</sub> (Min)	E <sub>1</sub>	F	Ko
8mm	*	*	1.5+0.1/-0.0	1.0	1.75±0.1	3.5±0.05	*
Width	P <sub>1</sub>	P <sub>2</sub>	P <sub>0</sub>	T (Max)	T <sub>1</sub> (Max)	T <sub>2</sub> (Max)	W (Max)
8mm	4.0±0.1	2.0±0.05	4.0±0.1	0.6	0.1	2.5	8.3

\*Note: Compliant to EIA-481

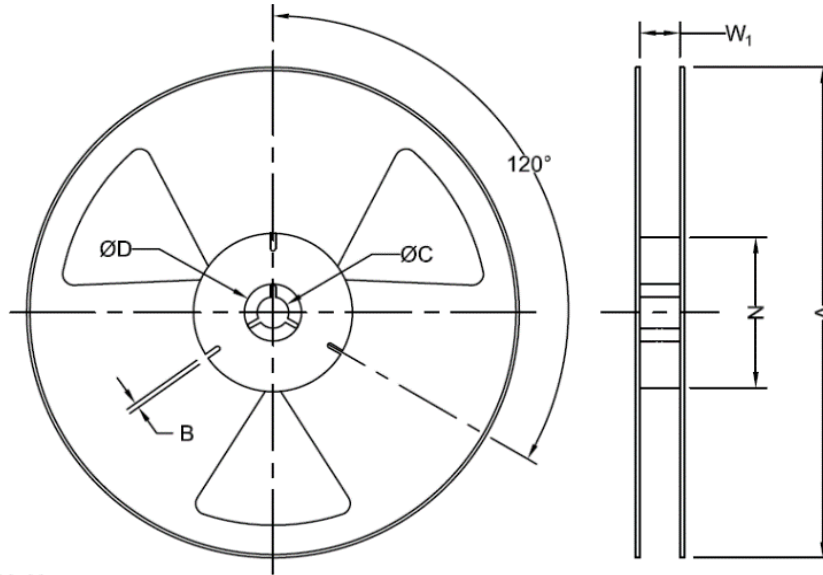

Unit: mm

Reel Specifications (mm)							
Width	Qty/Reel	A (Nom)	B (Min)	C (Min)	D (Min)	N (Min)	*W <sub>1</sub>
8mm	1000	178	1.5	13.0+0.5/-0.2	20.2	50	8.4+1.5/-0.0

\*Note: Measured at Hub

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View AS7056-BWLM on WIN SOURCE](#)
- ⊖ [OSRAM Opto Semiconductors Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management