THE DATASHEET OF

MAX6467US44D3+T

www.win-source.net 0086-755-83957316

MAX6467/MAX6468

Microprocessor Supervisory Reset Circuits with Edge-Triggered, One-Shot Manual Reset

General Description

The MAX6467/MAX6468 microprocessor (µP) supervisory circuits monitor single power-supply voltages from +1.8V to +5.0V and assert a reset if the supply voltage drops below its preset threshold. An edge-triggered, one-shot manual reset function ensures that the µP enters the reset mode for a fixed timeout period only, even in the event of a continuously asserted manual reset. The MAX6467/MAX6468 significantly improve system reliability compared to traditional manual reset supervisory circuits.

A variety of factory-trimmed threshold options accommodate different supply voltages and tolerances, eliminating external components. The factory-set thresholds range from +1.575V to +4.625V to monitor +5.0V, +3.3V, +3.0V, +2.5V, and +1.8V supplies with various tolerances. Reset timeout periods of 150ms (min) and 1200ms (min) are available to accommodate different µP platforms.

A single, active-low $\overline{RESET}$ output asserts when V_{CC} drops below its threshold or if the edge-triggered $\overline{MR}$ asserts low. $\overline{RESET}$ remains low for the reset time-out period after V_{CC} rises above its threshold and for a fixed, one-shot timeout period after a manual reset input falling edge. $\overline{RESET}$ remains valid as long as V_{CC} remains above +1V. Open-drain (MAX6467) and push-pull (MAX6468) output options provide additional flexibility in the system design.

The MAX6467/MAX6468 are offered in the space-saving 4-pin SOT143 package and the ultra-small 4-pin SC70 package and are specified over the automotive (-40°C to +125°C) temperature range.

Applications

- Cell Phones/PDAs
- Embedded Control Systems
- Industrial Equipment
- Automotive Products
- Portable/Battery-Powered Equipment
- Medical Devices
- DSL Modems
- MP3 Players
- GPS Systems
- Digital Cameras

Features

- Precision Factory-Set Reset Threshold Voltages for +5.0V, +3.3V, +3.0V, +2.5V, and +1.8V Supplies
- Edge-Triggered Manual Reset Input with One-Shot Pulsed Reset Output
- Two Reset Timeout Period Options (150ms or 1200ms min)
- Immune to Short Voltage Transients
- Low Supply Current (3µA at V_{CC} = +1.8V)
- RESET Valid to V_{CC} = +1V
- Active-Low Open-Drain and Push-Pull RESET Output Options
- -40°C to +125°C Operating Temperature Range
- Small 4-Pin SC70 and SOT143 Packages
- No External Components Required
- Pin Compatible with MAX811, MAX6315, MAX6384, and MAX6386
- AEC-Q100 Qualified, Refer to Ordering Information for Specific /V Parts

Ordering Information ***appears at end of data sheet.***

Typical Operating Circuit

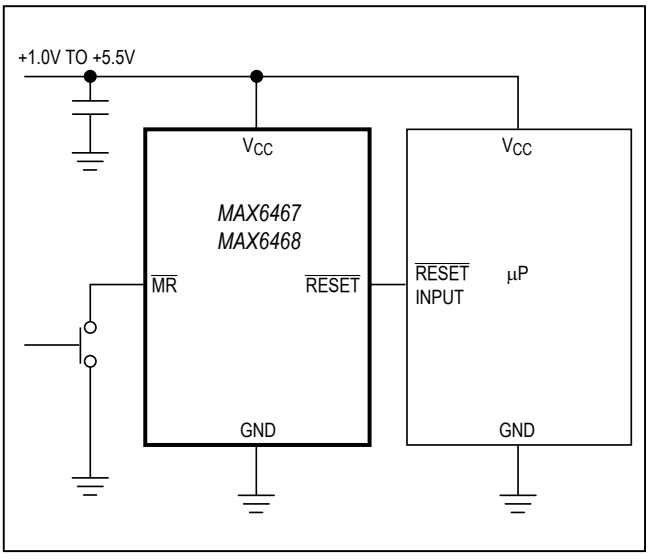

19-2523; Rev 6; 3/18

maxim integrated™

Absolute Maximum Ratings

V_{CC} to GND .....-0.3V to +6.0V
RESET to GND
  Open-Drain .....-0.3V to +6.0V
  Push-Pull .....-0.3V to (V_{CC} + 0.3V)
MR to GND.....-0.3V to (V_{CC} + 0.3V)
Input/Output Current (all pins).....20mA

Continuous Power Dissipation (T_A = +70°C)
  4-Pin SC70 (derate 3.1mW/°C above +70°C).....245mW
  4-Pin SOT143 (derate 4mW/°C above +70vC).....320mW
Operating Temperature Range..... -40°C to +125°C
Storage Temperature Range..... -65°C to +150°C
Junction Temperature.....+150°C
Lead Temperature (soldering, 10s) .....+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Electrical Characteristics

(V_{CC} = +1.2V to +5.5V, T_A = -40°C to +125°C, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Operating Voltage Range	V_{CC}	T_A = 0°C to +125°C	1.0		5.5	V
		T_A = -40°C to 0°C	1.2		5.5	
Supply Current	I_{CC}	V_{CC} = +5.5V, no load		7	13	µA
		V_{CC} = +3.6V, no load		6	11	
		V_{CC} = +2.5V, no load		4	8	
		V_{CC} = +1.8V, no load		3	7.5	
V_{CC} Reset Threshold (See the Reset Threshold Table)	V_{TH}	T_A = +25°C	-1.5%	V_{TH}	+1.5%	V
		T_A = -40°C to +85°C	-2.5%		+2.5%	
		T_A = +85°C to +125°C	-3%		+3%	
V_{CC} Reset Delay	t_{RD}	V_{CC} falling at 10mV/µs from V_{TH} + 100mV to V_{TH} - 100mV		35		µs
V_{CC} Reset Timeout Period	t_{RP}	D3 option	150	225	300	ms
		D7 option	1200	1800	2400	
$\overline{MR}$ Timeout Period	t_{MRP}	D3 and D7 options	150	225	300	ms
$\overline{MR}$ Rising Debounce Period (Note 2)	t_{DEB}	D3 and D7 options	150	225	300	ms
$\overline{MR}$ Input Voltage	V_{IL}	V_{TH} < +4V			0.3 x V_{CC}	V
	V_{IH}		0.7 x V_{CC}			
	V_{IL}	V_{TH} ≥ +4V			0.8	
	V_{IH}		2.4			
$\overline{MR}$ Minimum Input Pulse			1			µs
$\overline{MR}$ Glitch Rejection				100		ns
$\overline{MR}$ to $\overline{RESET}$ Delay				200		ns
$\overline{MR}$ Pullup Resistance		$\overline{MR}$ to V_{CC}	500	1560	3000	Ω
$\overline{RESET}$ Output High (MAX6468 Only)	V_{OH}	V_{CC} ≥ +2.5V, I_{SOURCE} = 500µA, $\overline{RESET}$ not asserted	0.8 x V_{CC}			V
		V_{CC} ≥ +4.5V, I_{SOURCE} = 800µA, $\overline{RESET}$ not asserted	0.8 x V_{CC}			

Electrical Characteristics

(V_{CC} = +1.2V to +5.5V, T_A = -40°C to +125°C, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
$\overline{RESET}$ Output Low	V_{OL}	V_{CC} ≥ +1V, I_{SINK} = 80µA, $\overline{RESET}$ asserted			0.3	V
		V_{CC} ≥ +2.5V, I_{SINK} = 1.2mA, $\overline{RESET}$ asserted			0.3	
		V_{CC} ≥ +4.5V, I_{SINK} = 3.2mA, $\overline{RESET}$ asserted			0.3	
$\overline{RESET}$ Output Leakage Current (MAX6467 Only)	I_{LKG}	$\overline{RESET}$ not asserted			1	µA

Note 1: Specifications over temperature are guaranteed by design. Production testing at T_A = +25°C only.

Note 2: The $\overline{MR}$ input ignores falling edges that occur within the $\overline{MR}$ rising debounce period (t_{DEB}) after $\overline{MR}$ first rises from low to high (after a valid $\overline{MR}$ reset assertion). This prevents invalid reset assertion due to switch bounce.

Typical Operating Characteristics

(V_{CC} = +5V, MAX6468US29D3 device, T_A = +25°C, unless otherwise noted.)

SUPPLY CURRENT vs. TEMPERATURE

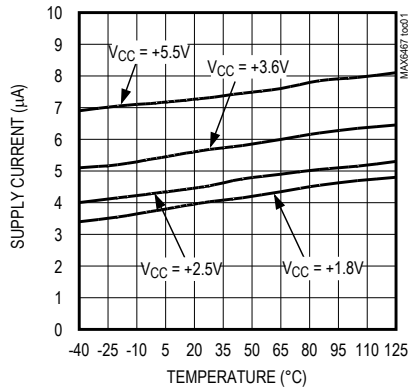

SUPPLY CURRENT vs. SUPPLY VOLTAGE

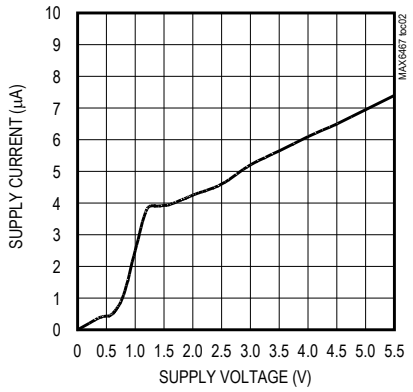

VCC TO RESET DELAY vs. TEMPERATURE

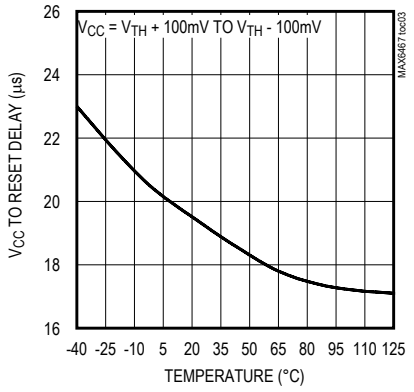

RESET TIMEOUT PERIOD vs. TEMPERATURE

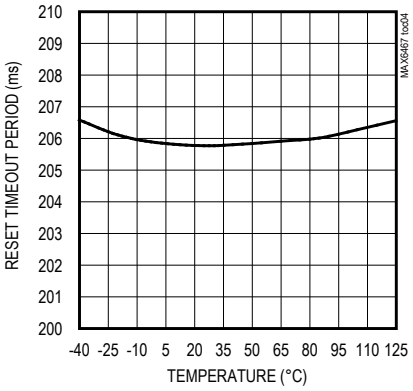

NORMALIZED RESET THRESHOLD vs. TEMPERATURE

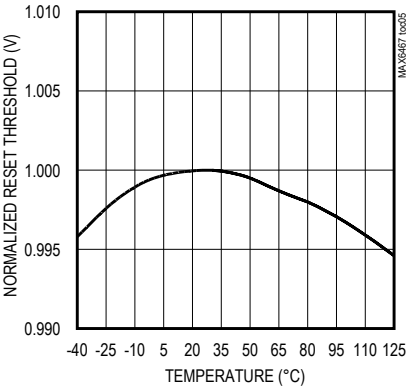

OUTPUT VOLTAGE LOW vs. SINK CURRENT

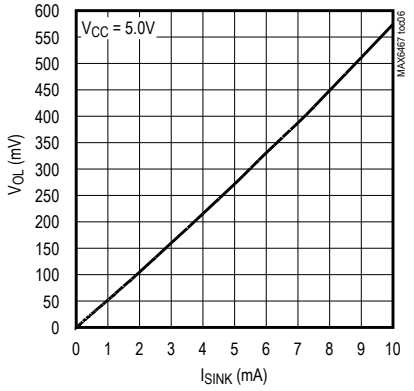

Typical Operating Characteristics

(V_{CC} = +5V, MAX6468US29D3 device, T_A = +25°C, unless otherwise noted.)

OUTPUT VOLTAGE HIGH vs. SOURCE CURRENT

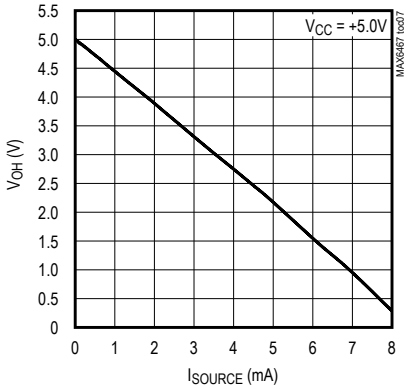

MAXIMUM TRANSIENT DURATION vs. RESET THRESHOLD OVERDRIVE

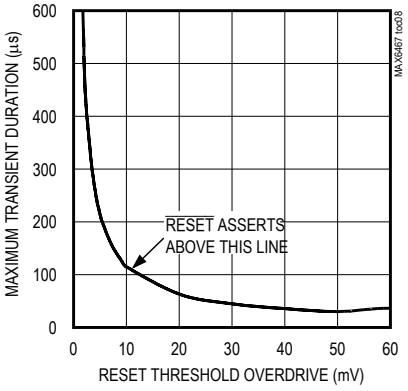

MR TO RESET DELAY vs. TEMPERATURE

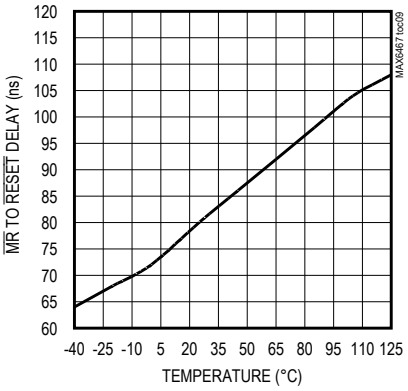

PROPAGATION DELAY (WITH 100mV OVERDRIVE)

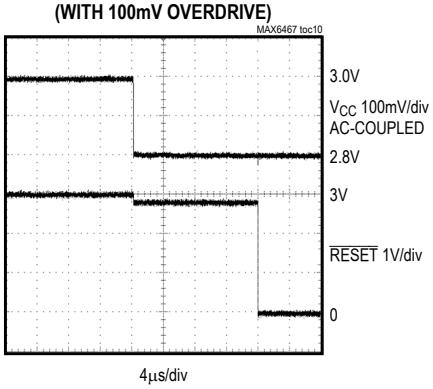

RESET PULLUP AND PULLDOWN RESPONSE

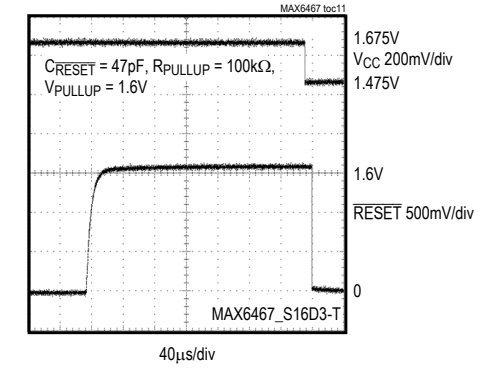

RESET TIMEOUT PERIOD

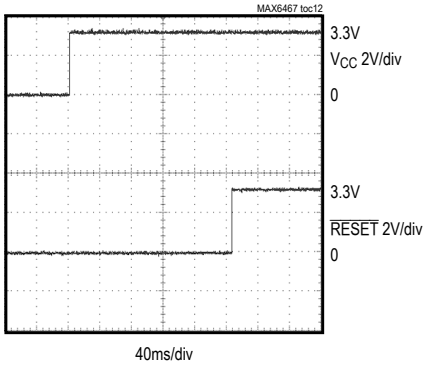

Pin Configurations

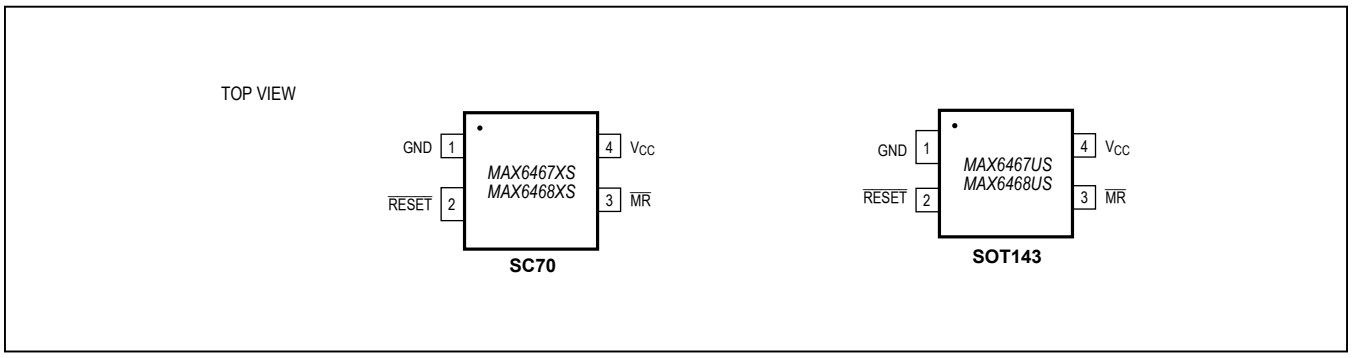

Pin Description

PIN	NAME	FUNCTION
1	GND	Ground
2	$\overline{RESET}$	Reset Output. $\overline{RESET}$ is an active-low open-drain (MAX6467) or push-pull (MAX6468) output. $\overline{RESET}$ asserts low when V_{CC} drops below the selected threshold and remains low for the V_{CC} reset timeout period after V_{CC} rises above the threshold. The $\overline{RESET}$ one-shot asserts low for a fixed $\overline{MR}$ reset timeout period on the falling edge of the manual reset input. The open-drain output requires an external pullup resistor
3	$\overline{MR}$	Manual Reset Input. Drive $\overline{MR}$ low to initiate a reset output. $\overline{MR}$ controls an edge-triggered one-shot that asserts $\overline{RESET}$ low for a fixed $\overline{MR}$ timeout period when $\overline{MR}$ is driven low. Internal timing circuitry ignores switch close and open bounce to ensure proper one-shot reset timing
4	V_{CC}	Power-Supply Input. V_{CC} provides power to the device and is also a monitored voltage. When V_{CC} drops below the selected threshold, $\overline{RESET}$ asserts low and remains low for the reset timeout period after V_{CC} rises above the threshold. For better noise immunity, bypass V_{CC} to GND with a 0.1µF capacitor

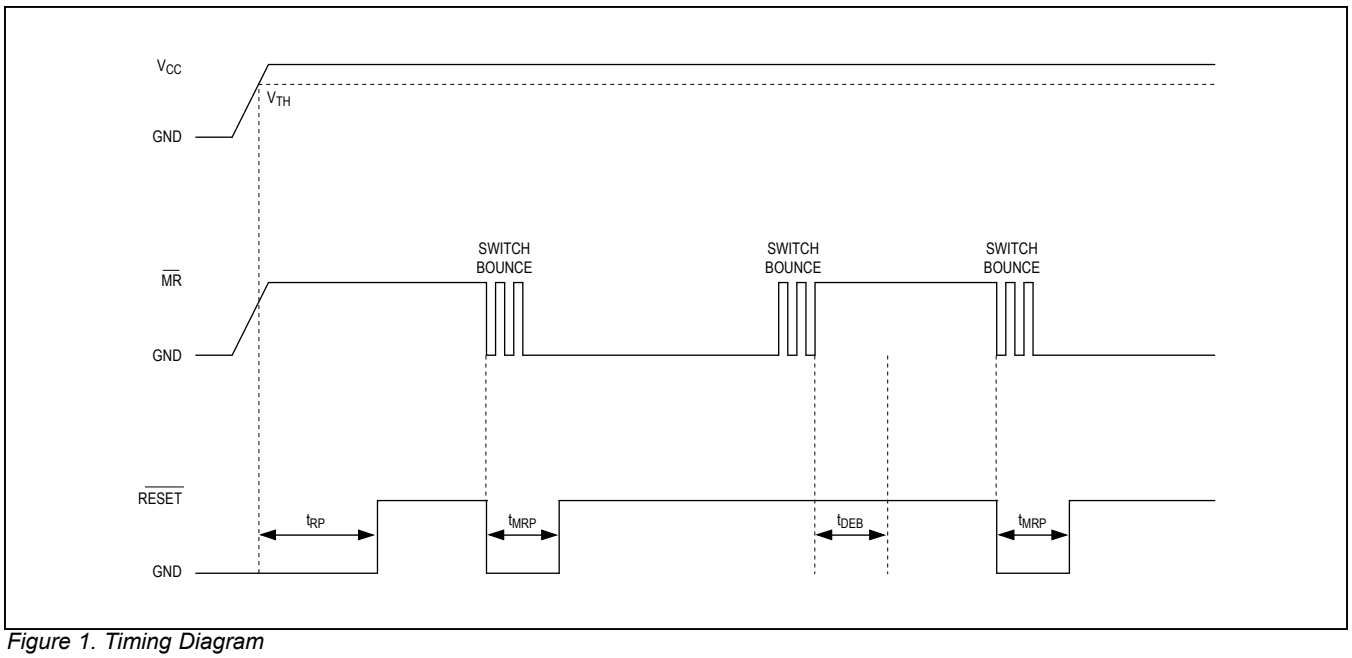

Figure 1. Timing Diagram

Detailed Description

Reset Output

The MAX6467 provides an active-low open-drain $\overline{RESET}$ output. The MAX6468 provides an active-low push-pull $\overline{RESET}$ output. $\overline{RESET}$ asserts low if V_{CC} drops below the selected threshold or if a falling edge occurs on $\overline{MR}$. $\overline{RESET}$ remains low for the V_{CC} reset timeout period after V_{CC} increases above the threshold voltage or is one-shot pulsed low for the $\overline{MR}$ timeout period after a falling edge on $\overline{MR}$.

Manual Reset Input

Many µP-based products require manual reset capability, allowing the operator, a test technician, or external logic circuitry to initiate a reset. A falling edge on $\overline{MR}$ asserts RESET low. $\overline{RESET}$ is one-shot pulsed low for the $\overline{MR}$ timeout period after a falling edge on $\overline{MR}$. An internal 1.5kΩ pullup resistor to V_{CC} allows MR to be left unconnected if not used. $\overline{MR}$ can be driven with TTL or CMOS-logic levels, or with open-drain/collector outputs. Connect a normally open momentary pushbutton switch from $\overline{MR}$ to GND to realize a manual reset function. External debounce circuitry is not required, as the MAX6467/MAX6468 respond to the first falling edge on $\overline{MR}$ and ignore subsequent falling edges within the reset timeout period and during the $\overline{MR}$ debounce period (see Figure 1). After $\overline{MR}$ goes high for 150ms (t_{DEB}), the manual reset one-shot is ready to trigger a reset on the next $\overline{MR}$ falling edge. Connect a 0.1µF capacitor from $\overline{MR}$ to GND when using long cables to provide additional noise immunity (Figure 2).

Reset Timeout Delay*

RESET TIMEOUT SUFFIX	V_{CC} RESET TIMEOUT PERIOD (min/max) (ms)	$\overline{MR}$ TIMEOUT PERIOD (min/max) (ms)	$\overline{MR}$ RISING DEBOUNCE PERIOD (min/max) (ms)
D3	150/300	150/300	150/300
D7	1200/2400	150/300	150/300

**Additional reset timeout options may be available. Contact factory for availability.*

Applications Information

Falling V_{CC} Transients

In addition to issuing a reset to the µP during power-up, power-down, and brownout conditions, the MAX6467/MAX6468 are relatively immune to short-duration falling V_{CC} transients (glitches). The Typical Operating Characteristics section shows the Maximum Transient Duration vs. V_{CC} Overdrive for which the MAX6467/MAX6468 do not generate a reset pulse. This graph was generated using a falling pulse applied to V_{CC} starting above the actual reset threshold and ending below the threshold by the magnitude indicated (V_{CC} Overdrive). The graph indicates the typical maximum pulse width a falling V_{CC} transient can have without initiating a reset pulse. As the magnitude of the transient increases (goes farther below the reset threshold), the maximum allowable pulse width decreases. A 0.1µF bypass capacitor from V_{CC} to GND provides additional transient immunity.

Ensuring a Valid RESET Output Down to V_{CC} = 0V

The MAX6467/MAX6468 guarantee proper operation down to V_{CC} = +1V. In applications that require valid reset levels down to V_{CC} = 0V, a pulldown resistor to active-low outputs (MAX6468 only, Figure 3) ensures that $\overline{RESET}$ remains valid while the $\overline{RESET}$ output can no longer sink current. This scheme does not work with the open-drain outputs of the MAX6467. Ensure that the resistor value used does not overload the $\overline{RESET}$ output when V_{CC} is above the reset threshold. For most applications, use 100kΩ to 1MΩ.

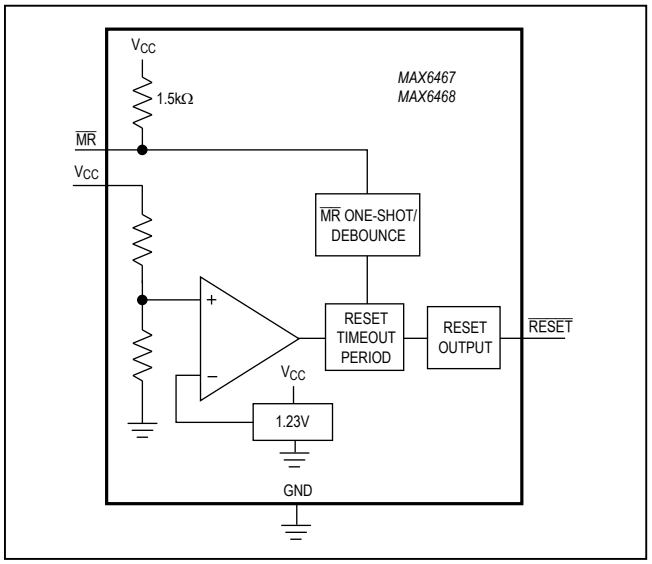

Figure 2. Functional Diagram

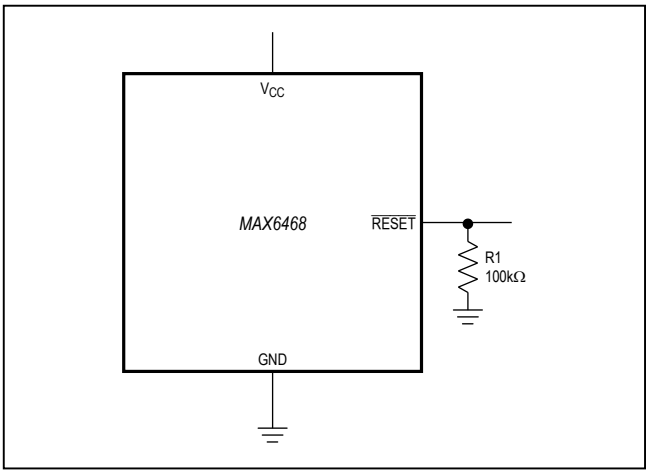

Figure 3. $\overline{RESET}$ Valid to V_{CC} = 0V

Chip Information

TRANSISTOR COUNT: 748

PROCESS: BiCMOS

Standard Versions

PART	TOP MARK
MAX6467XS16D3	AGL
MAX6467XS22D3	AGM
MAX6467XS26D3	AGN
MAX6467XS29D3	AGO
MAX6467XS46D3	AGP
MAX6467US16D3	KAFN
MAX6467US22D3	KAFO
MAX6467US26D3	KAFP
MAX6467US29D3	KAFQ
MAX6467US46D3	KAFR
MAX6468XS16D3	AGQ
MAX6468XS22D3	AGR
MAX6468XS26D3	AGS
MAX6468XS29D3	AGC
MAX6468XS46D3	AGB
MAX6468US16D3	KAFS
MAX6468US22D3	KAFT
MAX6468US26D3	KAFU
MAX6468US29D3	KAEW
MAX6468US46D3	KAFV

Reset Threshold (-40°C to +85°C)

SUFFIX	V_{TH} (min)	V_{TH} (typ)	V_{TH} (max)
46	4.509	4.625	4.741
45	4.388	4.500	4.613
44	4.266	4.375	4.484
43	4.193	4.300	4.408
42	4.095	4.200	4.305
41	3.998	4.100	4.203
40	3.900	4.000	4.100
39	3.803	3.900	3.998
38	3.705	3.800	3.895
37	3.608	3.700	3.793
36	3.510	3.600	3.690
35	3.413	3.500	3.588
34	3.315	3.400	3.485
33	3.218	3.300	3.383
32	3.120	3.200	3.280
31	2.998	3.075	3.152
30	2.925	3.000	3.075
29	2.852	2.925	2.998
28	2.730	2.800	2.870
27	2.633	2.700	2.768
26	2.559	2.625	2.691
25	2.438	2.500	2.563
24	2.340	2.400	2.460
23	2.255	2.313	2.370
22	2.133	2.188	2.242
21	2.048	2.100	2.153
20	1.950	2.000	2.050
19	1.853	1.900	1.948
18	1.755	1.800	1.845
17	1.623	1.665	1.707
16	1.536	1.575	1.614

Ordering Information

PART	TEMP RANGE	PIN-PACKAGE
MAX6467XS_ _D_-T	-40°C to +125°C	4 SC70-4
MAX6467XS_ _D_/V+T*	-40°C to +125°C	4 SC70-4
MAX6467XS29D3/V+T	-40°C to +125°C	4 SC70-4
MAX6467XS32D3/V+T	-40°C to +125°C	4 SC70-4
MAX6467US_ _D_-T	-40°C to +125°C	4 SOT143-4
MAX6468XS_ _D_-T	-40°C to +125°C	4 SC70-4
MAX6468US_ _D_-T	-40°C to +125°C	4 SOT143-4

Note: *Insert reset threshold suffix (see Reset Threshold table) after XS or US. Insert reset timeout delay (see Reset Timeout Delay table) after D to complete the part number. Sample stock is generally held on standard versions only (see Standard Versions table). Standard versions have an order increment requirement of 2500 pieces. Nonstandard versions have an order increment requirement of 10,000 pieces. Contact factory for availability Devices are available in both leaded and lead-free packaging. Specify lead-free by replacing "T" with "+T" when ordering.*

T = Tape and reel.
/V denotes an automotive qualified part.
+Denotes a lead(pb)-free/RoHS-compliant package.
**Future product—contact factory for availability.*

Package Information

For the latest package outline information and land patterns (footprints), go to **www.maximintegrated.com/packages**. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE TYPE	PACKAGE CODE	OUTLINE NO.	LAND PATTERN NO.
4 SC70	X4+1	21-0098	90-0187
4 SOT143	U3+1	21-0052	90-0183

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
2	3/14	Added /V OPNs	1
3	4/14	Removed automotive reference from *Applications* section	1
	6/14	Reversed 4/14 change and added automotive reference back to *Applications* section	1
4	10/14	Fixed typo in *Package Information* section	9
5	10/15	Fixed MR Pullup Resistance specification in *Electrical Characteristics* table	2
6	3/18	Updated *Benefits and Features* and *Ordering Information* table	1, 9

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at www.maximintegrated.com.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

Maxim Integrated and the Maxim Integrated logo are trademarks of Maxim Integrated Products, Inc. © 2018 Maxim Integrated Products, Inc.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View MAX6467US44D3+T on WIN SOURCE
- Maxim Integrated Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management