



**THE DATASHEET OF
2SD1760TLQ**



Power Transistor (50V, 3A)

2SD1760 / 2SD1864


●Features

- 1) Low $V_{CE(sat)}$.
 $V_{CE(sat)} = 0.5V$ (Typ.)
 $(I_c/I_b = 2A / 0.2A)$
- 2) Complements the 2SB1184 / 2SB1243.

●Structure

Epitaxial planar type
 NPN silicon transistor

●External dimensions (Units : mm)

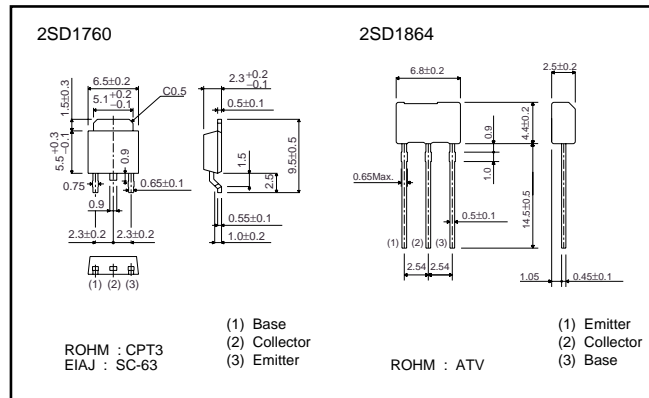

●Absolute maximum ratings ($T_a=25^\circ C$)

Parameter	Symbol	Limits	Unit
Collector-base voltage	V_{CBO}	60	V
Collector-emitter voltage	V_{CEO}	50	V
Emitter-base voltage	V_{EBO}	5	V
Collector current	I_c	3	A (DC)
		4.5	A (Pulse) ^{*1}
Collector power dissipation	2SD1760	15	W ($T_c=25^\circ C$) ^{*2}
	2SD1864	1	W
Junction temperature	T_j	150	$^\circ C$
Storage temperature	T_{stg}	-55~+150	$^\circ C$

^{*1} Single pulse, $P_w=100ms$

^{*2} Printed circuit board, 1.7mm thick, collector copper plating 100mm² or larger.

Transistors

●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	BV _{CB0}	60	-	-	V	I _c =50μA
Collector-emitter breakdown voltage	BV _{CE0}	50	-	-	V	I _c =1mA
Emitter-base breakdown voltage	BV _{EB0}	5	-	-	V	I _E =50μA
Collector cutoff current	I _{CB0}	-	-	1	μA	V _{CB} =40V
Emitter cutoff current	I _{EB0}	-	-	1	μA	V _{EB} =4V
Collector-emitter saturation voltage	V _{CE(sat)}	-	0.5	1	V	I _c /I _b =2A/0.2A
DC current transfer ratio	h _{FE}	82	-	390	-	V _{CE} =3V, I _c =0.5A
Transition frequency	f _t	-	90	-	MHZ	V _{CE} =5V, I _E =500mA, f=30MHz
Output capacitance	C _{ob}	-	40	-	pF	V _{CB} =10V, I _E =0A, f=1MHz

* Measured using pulse current.

●Packaging specifications and h_{FE}

Type	h _{FE}	Package	Taping	
		Code	TL	TV2
		Basic ordering unit (pieces)	2500	2500
2SD1760	PQR		○	-
2SD1864	PQR		-	○

h_{FE} values are classified as follows:

Item	P	Q	R
h _{FE}	82~180	120~270	180~390

●Electrical characteristic curves

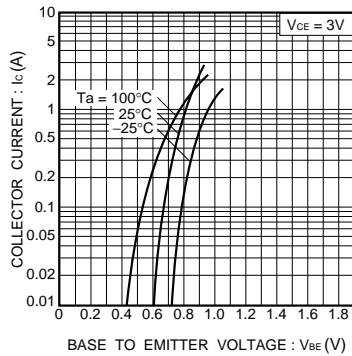


Fig.1 Grounded emitter propagation characteristics

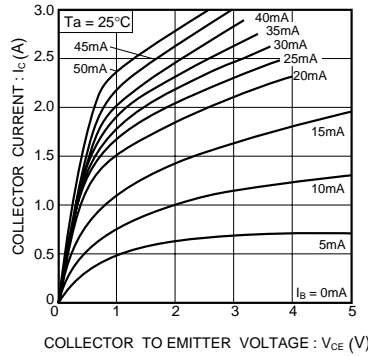


Fig.2 Grounded emitter output characteristics (I)

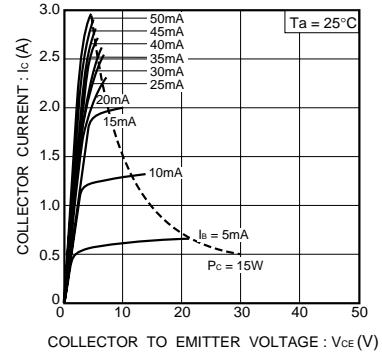


Fig.3 Grounded-emitter output characteristics(II)

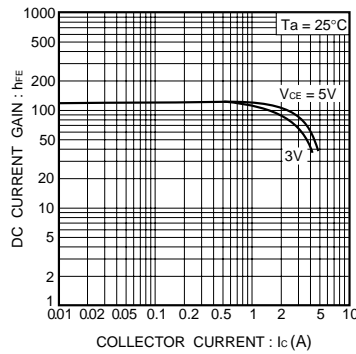


Fig.4 DC current gain vs. collector current(I)

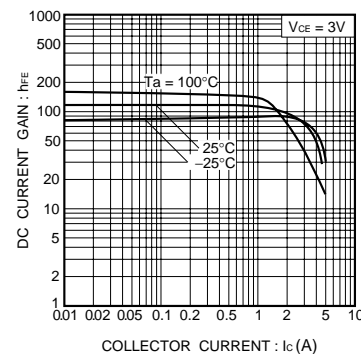


Fig.5 DC current gain vs. collector current(II)

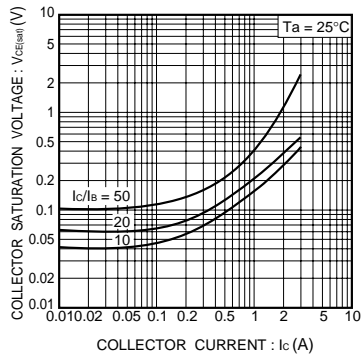


Fig.6 Collector-emitter saturation voltage vs. collector current

Transistors

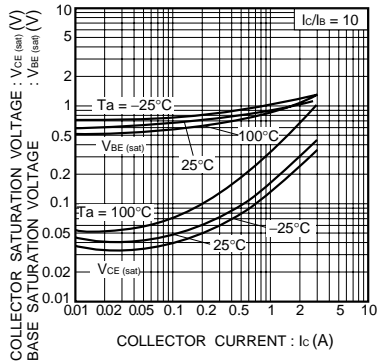


Fig.7 Collector-emitter saturation voltage vs. collector current
Base-emitter saturation voltage vs. collector current

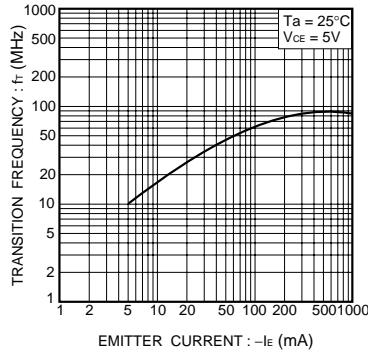


Fig.8 Gain bandwidth product vs. emitter current

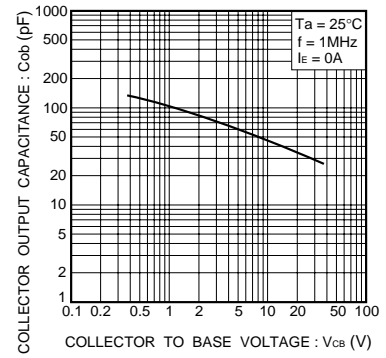


Fig.9 Collector output capacitance vs. collector-base voltage

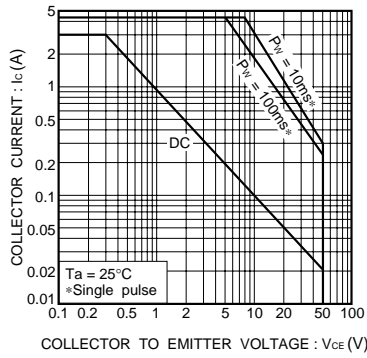


Fig.10 Safe operating area (2SD1760)

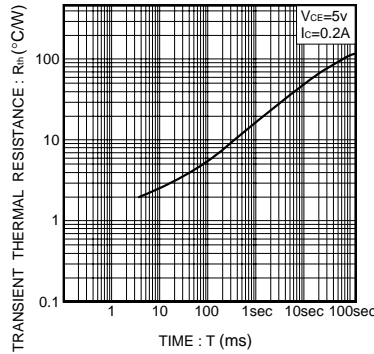


Fig.11 Transient thermal resistance (2SD1760)

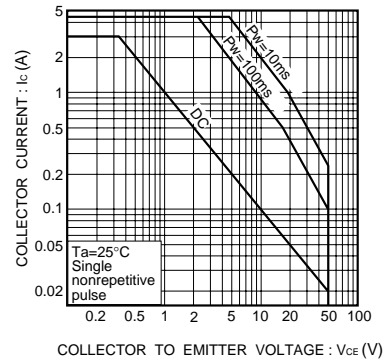


Fig.12 Safe operating area (2SD1864)

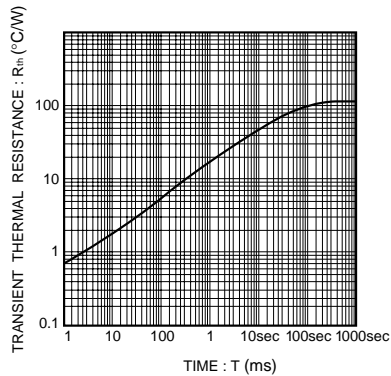


Fig.13 Transient thermal resistance (2SD1864)

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View 2SD1760TLQ on WIN SOURCE](#)
- [Rohm Semiconductor Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management