





# MJD44H11 (NPN), MJD45H11 (PNP)

## THERMAL CHARACTERISTICS

| Characteristic                                   | Symbol          | Max  | Unit          |
|--|-----------------|------|---------------|
| Thermal Resistance, Junction-to-Case             | $R_{\theta JC}$ | 6.25 | $^{\circ}C/W$ |
| Thermal Resistance, Junction-to-Ambient (Note 2) | $R_{\theta JA}$ | 71.4 | $^{\circ}C/W$ |
| Lead Temperature for Soldering                   | $T_L$           | 260  | $^{\circ}C$   |

2. These ratings are applicable when surface mounted on the minimum pad sizes recommended.

## ELECTRICAL CHARACTERISTICS

( $T_A = 25^{\circ}C$ , common for NPN and PNP, minus sign, “-”, for PNP omitted, unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|----------------|--------|-----|-----|-----|------|
|----------------|--------|-----|-----|-----|------|

### OFF CHARACTERISTICS

|   |                |    |   |     |         |
|---|----------------|----|---|-----|---------|
| Collector-Emitter Sustaining Voltage<br>( $I_C = 30\text{ mA}$ , $I_B = 0$ )    | $V_{CEO(sus)}$ | 80 | - | -   | Vdc     |
| Collector Cutoff Current<br>( $V_{CE} = \text{Rated } V_{CEO}$ , $V_{BE} = 0$ ) | $I_{CES}$      | -  | - | 1.0 | $\mu A$ |
| Emitter Cutoff Current<br>( $V_{EB} = 5\text{ Vdc}$ )                           | $I_{EBO}$      | -  | - | 1.0 | $\mu A$ |

### ON CHARACTERISTICS

|   |               |          |        |        |     |
|---|---------------|----------|--------|--------|-----|
| Collector-Emitter Saturation Voltage<br>( $I_C = 8\text{ Adc}$ , $I_B = 0.4\text{ Adc}$ )                                   | $V_{CE(sat)}$ | -        | -      | 1      | Vdc |
| Base-Emitter Saturation Voltage<br>( $I_C = 8\text{ Adc}$ , $I_B = 0.8\text{ Adc}$ )  | $V_{BE(sat)}$ | -        | -      | 1.5    | Vdc |
| DC Current Gain<br>( $V_{CE} = 1\text{ Vdc}$ , $I_C = 2\text{ Adc}$ )<br>( $V_{CE} = 1\text{ Vdc}$ , $I_C = 4\text{ Adc}$ ) | $h_{FE}$      | 60<br>40 | -<br>- | -<br>- | -   |

### DYNAMIC CHARACTERISTICS

|   |          |        |           |        |     |
|---|----------|--------|-----------|--------|-----|
| Collector Capacitance<br>( $V_{CB} = 10\text{ Vdc}$ , $f_{test} = 1\text{ Mhz}$ )<br>MJD44H11<br>MJD45H11                     | $C_{cb}$ | -<br>- | 45<br>130 | -<br>- | pF  |
| Gain Bandwidth Product<br>( $I_C = 0.5\text{ Adc}$ , $V_{CE} = 10\text{ Vdc}$ , $f = 20\text{ Mhz}$ )<br>MJD44H11<br>MJD45H11 | $f_T$    | -<br>- | 85<br>90  | -<br>- | MHz |

### SWITCHING TIMES

|   |             |        |            |        |    |
|---|-------------|--------|------------|--------|----|
| Delay and Rise Times<br>( $I_C = 5\text{ Adc}$ , $I_{B1} = 0.5\text{ Adc}$ )<br>MJD44H11<br>MJD45H11  | $t_d + t_r$ | -<br>- | 300<br>135 | -<br>- | ns |
| Storage Time<br>( $I_C = 5\text{ Adc}$ , $I_{B1} = I_{B2} = 0.5\text{ Adc}$ )<br>MJD44H11<br>MJD45H11 | $t_s$       | -<br>- | 500<br>500 | -<br>- | ns |
| Fall Time<br>( $I_C = 5\text{ Adc}$ , $I_{B1} = I_{B2} = 0.5\text{ Adc}$ )<br>MJD44H11<br>MJD45H11    | $t_f$       | -<br>- | 140<br>100 | -<br>- | ns |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

# MJD44H11 (NPN), MJD45H11 (PNP)

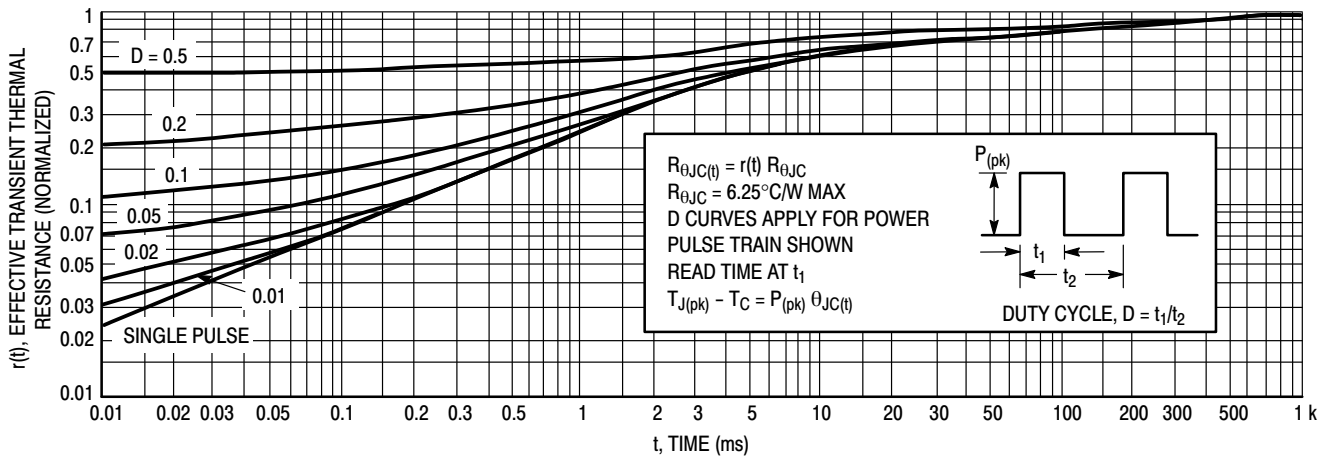


Figure 1. Thermal Response

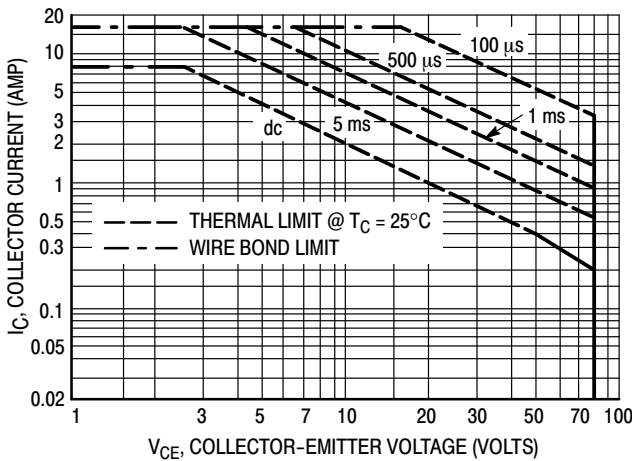


Figure 2. Maximum Forward Bias Safe Operating Area

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate  $I_C - V_{CE}$  limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 2 is based on  $T_{J(pk)} = 150^{\circ}\text{C}$ ;  $T_C$  is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided  $T_{J(pk)} \leq 150^{\circ}\text{C}$ .  $T_{J(pk)}$  may be calculated from the data in Figure 1. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

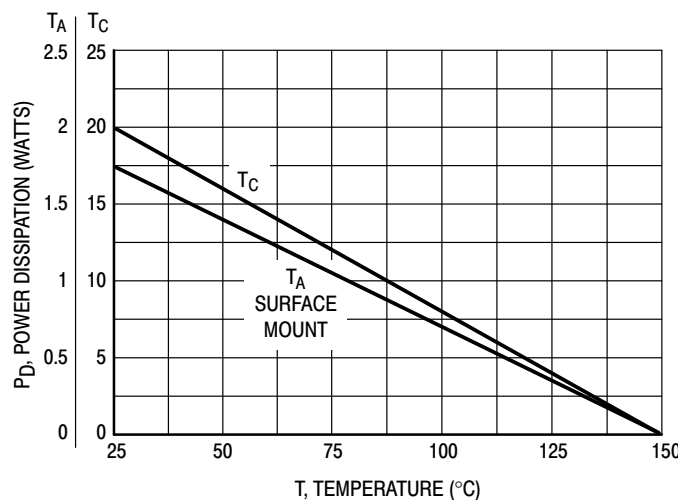


Figure 3. Power Derating

# MJD44H11 (NPN), MJD45H11 (PNP)

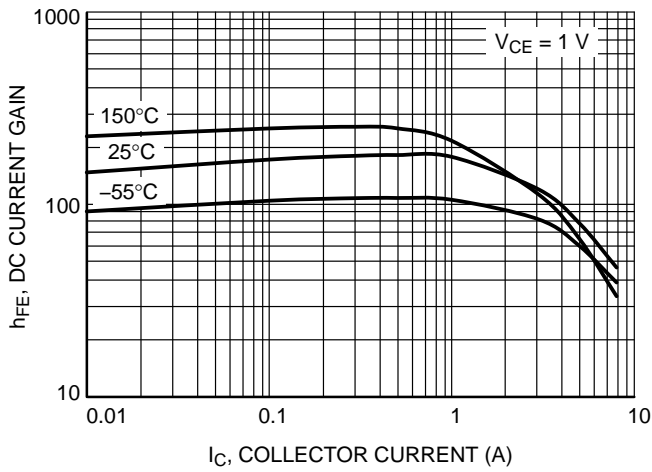


Figure 4. MJD44H11 DC Current Gain

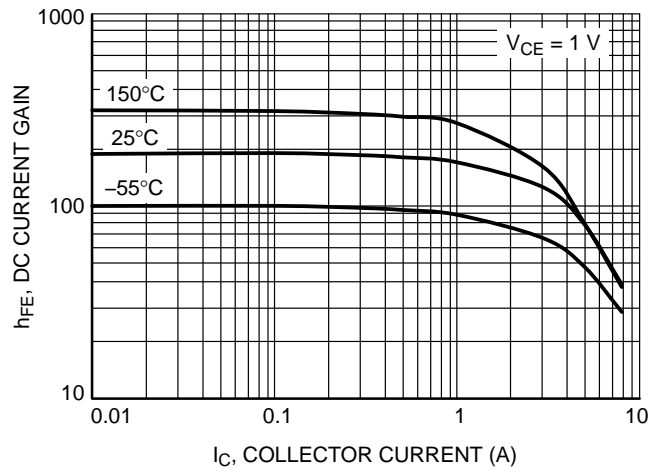


Figure 5. MJD45H11 DC Current Gain

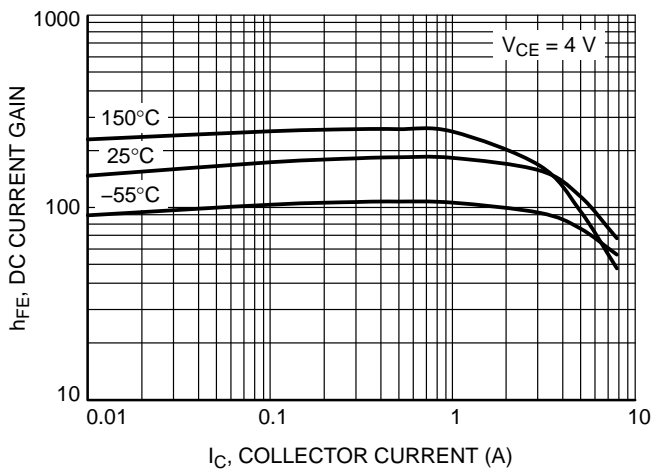


Figure 6. MJD44H11 DC Current Gain

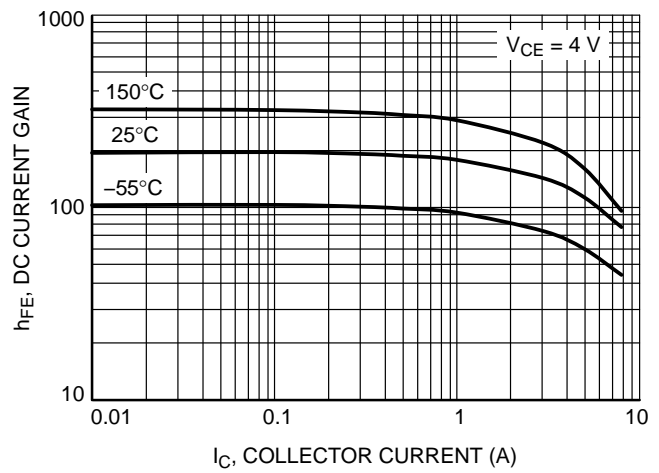


Figure 7. MJD45H11 DC Current Gain

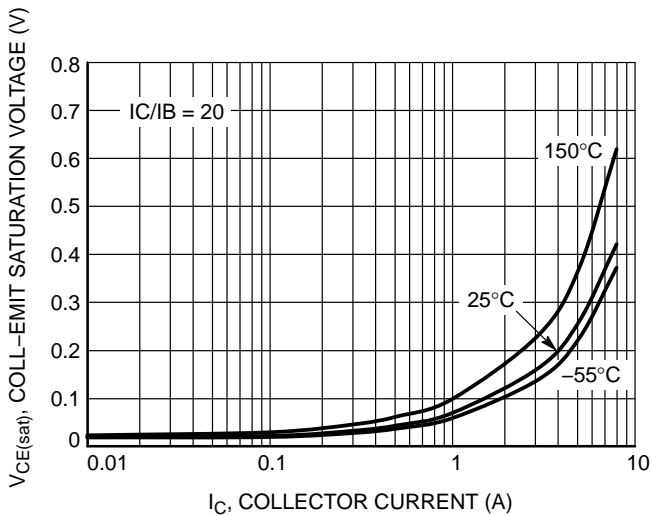


Figure 8. MJD44H11 Saturation Voltage  
 $V_{CE(sat)}$



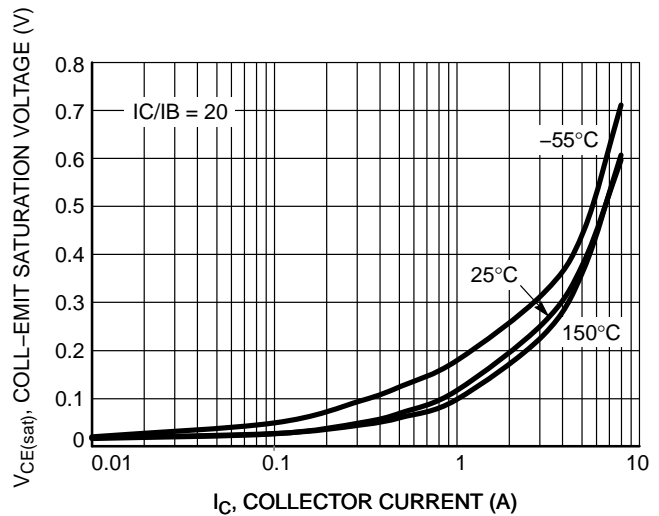


Figure 9. MJD45H11 Saturation Voltage  
 $V_{CE(sat)}$


# MJD44H11 (NPN), MJD45H11 (PNP)

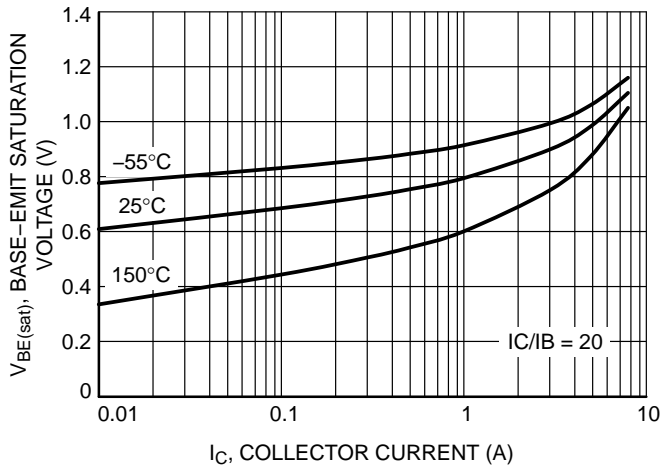


**Figure 10. MJD44H11 Saturation Voltage**  
 $V_{BE(sat)}$

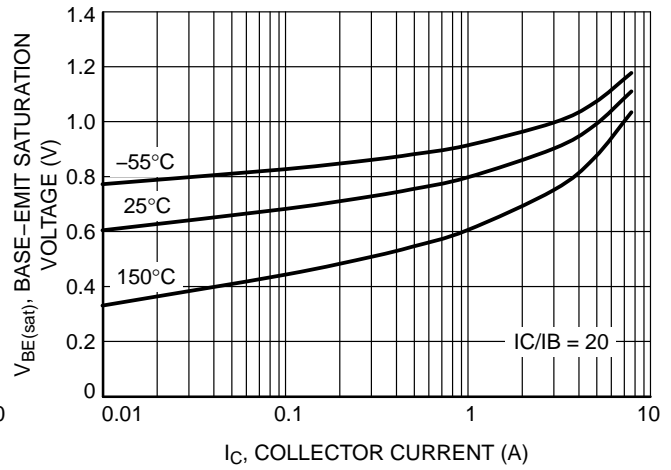


**Figure 11. MJD45H11 Saturation Voltage**  
 $V_{BE(sat)}$

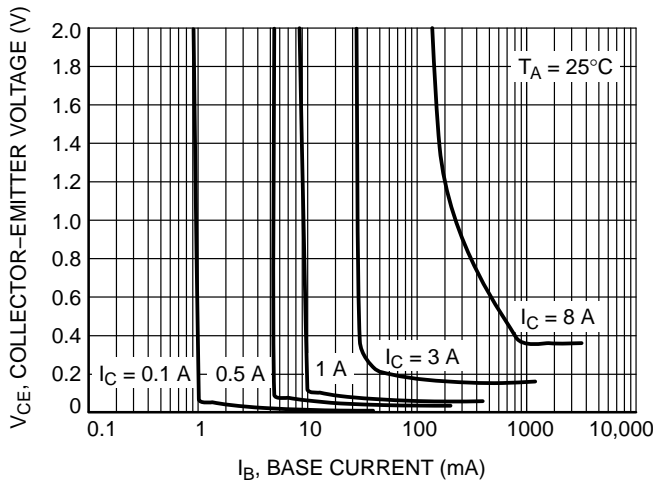


**Figure 12. MJD44H11 Collector Saturation Region**

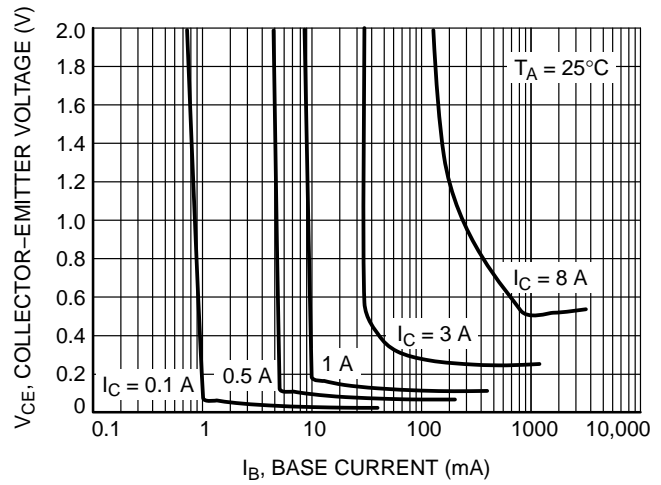

**Figure 13. MJD45H11 Collector Saturation Region**

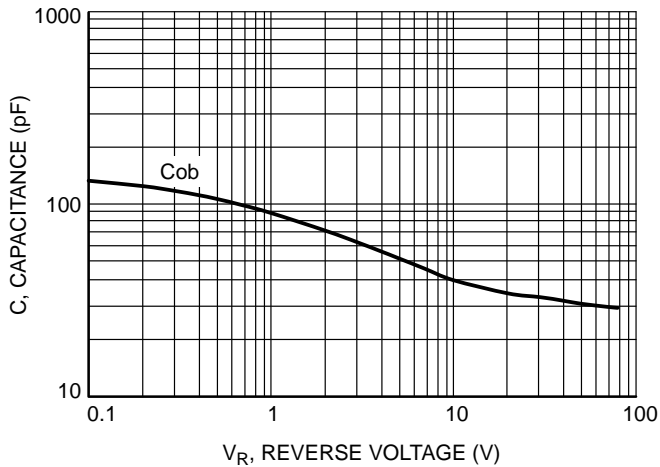


**Figure 14. MJD44H11 Capacitance**

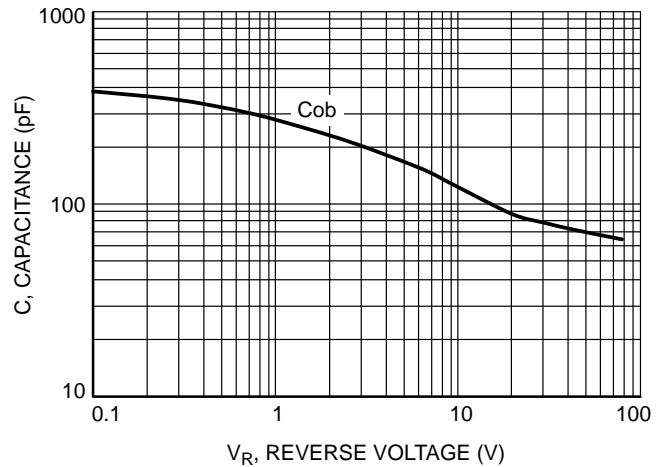


**Figure 15. MJD45H11 Capacitance**

# MJD44H11 (NPN), MJD45H11 (PNP)

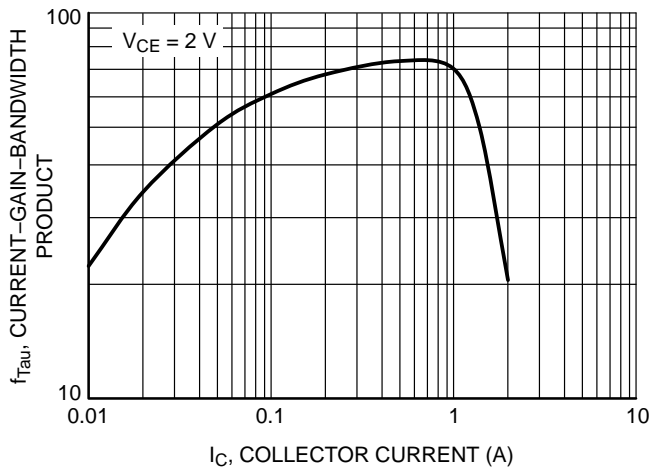

**Figure 16. MJD44H11  
Current-Gain-Bandwidth Product**

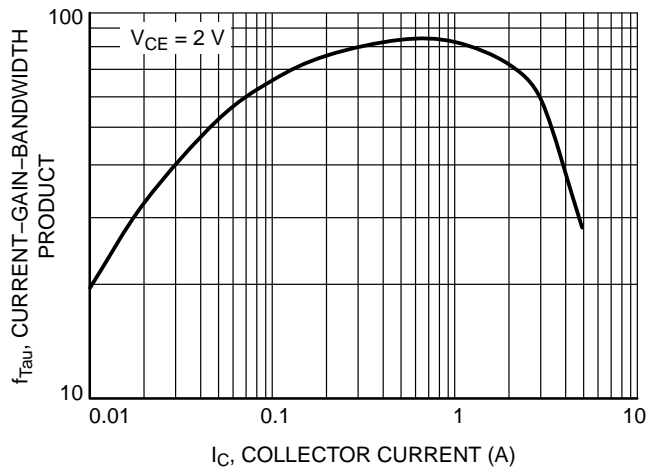

**Figure 17. MJD45H11  
Current-Gain-Bandwidth Product**

## MJD44H11 (NPN), MJD45H11 (PNP)

### ORDERING INFORMATION

| Device            | Package Type        | Package | Shipping†           |
|-------------------|---------------------|---------|---------------------|
| MJD44H11G         | DPAK<br>(Pb-Free)   | 369C    | 75 Units / Rail     |
| NJVMJD44H11G      | DPAK<br>(Pb-Free)   | 369C    | 75 Units / Rail     |
| MJD44H11-1G       | DPAK-3<br>(Pb-Free) | 369D    | 75 Units / Rail     |
| MJD44H11RLG       | DPAK<br>(Pb-Free)   | 369C    | 1,800 / Tape & Reel |
| NJVMJD44H11RLG*   | DPAK<br>(Pb-Free)   | 369C    | 1,800 / Tape & Reel |
| MJD44H11T4G       | DPAK<br>(Pb-Free)   | 369C    | 2,500 / Tape & Reel |
| NJVMJD44H11T4G*   | DPAK<br>(Pb-Free)   | 369C    | 2,500 / Tape & Reel |
| MJD44H11T5G       | DPAK<br>(Pb-Free)   | 369C    | 2,500 / Tape & Reel |
| MJD45H11G         | DPAK<br>(Pb-Free)   | 369C    | 75 Units / Rail     |
| NJVMJD45H11G*     | DPAK<br>(Pb-Free)   | 369C    | 75 Units / Rail     |
| MJD45H11-1G       | DPAK-3<br>(Pb-Free) | 369D    | 75 Units / Rail     |
| MJD45H11RLG       | DPAK<br>(Pb-Free)   | 369C    | 1,800 / Tape & Reel |
| NJVMJD45H11RLG*   | DPAK<br>(Pb-Free)   | 369C    | 1,800 / Tape & Reel |
| MJD45H11T4G       | DPAK<br>(Pb-Free)   | 369C    | 2,500 / Tape & Reel |
| NJVMJD45H11T4G*   | DPAK<br>(Pb-Free)   | 369C    | 2,500 / Tape & Reel |
| NJVMJD44H11D3T4G* | DPAK<br>(Pb-Free)   | 369G    | 2,500 / Tape & Reel |
| NJVMJD45H11D3T4G* | DPAK<br>(Pb-Free)   | 369G    | 2,500 / Tape & Reel |


†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*NJV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable

# MJD44H11 (NPN), MJD45H11 (PNP)

## PACKAGE DIMENSIONS

### DPAK (SINGLE GAUGE) CASE 369C ISSUE F

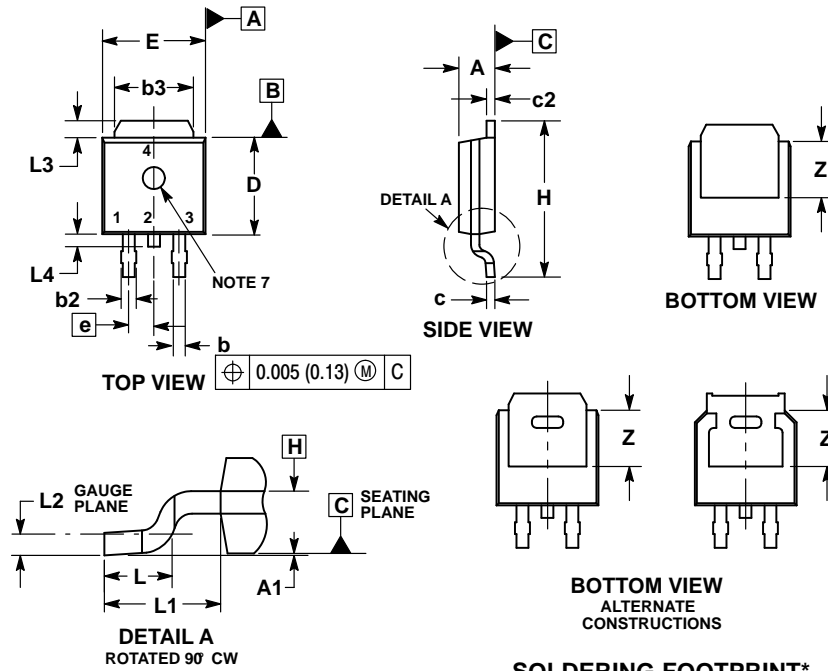


**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: INCHES.
3. THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSIONS b3, L3 and Z.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.006 INCHES PER SIDE.
5. DIMENSIONS D AND E ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
6. DATUMS A AND B ARE DETERMINED AT DATUM PLANE H.
7. OPTIONAL MOLD FEATURE.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.086     | 0.094 | 2.18        | 2.38  |
| A1  | 0.000     | 0.005 | 0.00        | 0.13  |
| b   | 0.025     | 0.035 | 0.63        | 0.89  |
| b2  | 0.028     | 0.045 | 0.72        | 1.14  |
| b3  | 0.180     | 0.215 | 4.57        | 5.46  |
| c   | 0.018     | 0.024 | 0.46        | 0.61  |
| c2  | 0.018     | 0.024 | 0.46        | 0.61  |
| D   | 0.235     | 0.245 | 5.97        | 6.22  |
| E   | 0.250     | 0.265 | 6.35        | 6.73  |
| e   | 0.090 BSC |       | 2.29 BSC    |       |
| H   | 0.370     | 0.410 | 9.40        | 10.41 |
| L   | 0.055     | 0.070 | 1.40        | 1.78  |
| L1  | 0.114 REF |       | 2.90 REF    |       |
| L2  | 0.020 BSC |       | 0.51 BSC    |       |
| L3  | 0.035     | 0.050 | 0.89        | 1.27  |
| L4  | ---       | 0.040 | ---         | 1.01  |
| Z   | 0.155     | ---   | 3.93        | ---   |

### SOLDERING FOOTPRINT\*

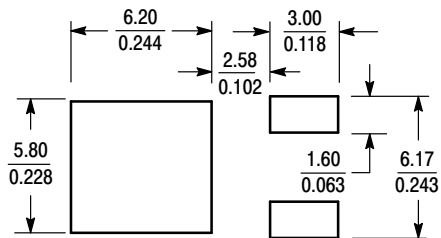

SCALE 3:1  $\left(\frac{\text{mm}}{\text{inches}}\right)$

**STYLE 1:**


- PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# MJD44H11 (NPN), MJD45H11 (PNP)

## PACKAGE DIMENSIONS

### IPAK CASE 369D ISSUE C

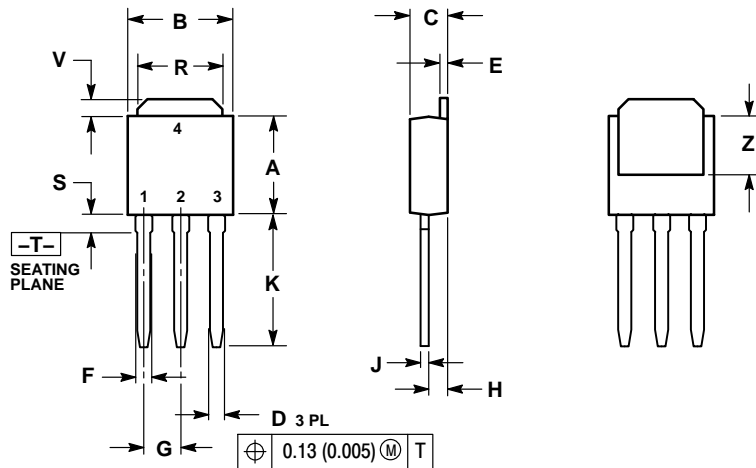


- NOTES:  
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES |       | MILLIMETERS |      |
|-----|--------|-------|-------------|------|
|     | MIN    | MAX   | MIN         | MAX  |
| A   | 0.235  | 0.245 | 5.97        | 6.35 |
| B   | 0.250  | 0.265 | 6.35        | 6.73 |
| C   | 0.086  | 0.094 | 2.19        | 2.38 |
| D   | 0.027  | 0.035 | 0.69        | 0.88 |
| E   | 0.018  | 0.023 | 0.46        | 0.58 |
| F   | 0.037  | 0.045 | 0.94        | 1.14 |
| G   | 0.090  | BSC   | 2.29        | BSC  |
| H   | 0.034  | 0.040 | 0.87        | 1.01 |
| J   | 0.018  | 0.023 | 0.46        | 0.58 |
| K   | 0.350  | 0.380 | 8.89        | 9.65 |
| R   | 0.180  | 0.215 | 4.45        | 5.45 |
| S   | 0.025  | 0.040 | 0.63        | 1.01 |
| V   | 0.035  | 0.050 | 0.89        | 1.27 |
| Z   | 0.155  | ---   | 3.93        | ---  |

- STYLE 1:  
PIN 1. BASE  
2. COLLECTOR  
3. EMITTER  
4. COLLECTOR

### DPAK-3, SURFACE MOUNT CASE 369G ISSUE O

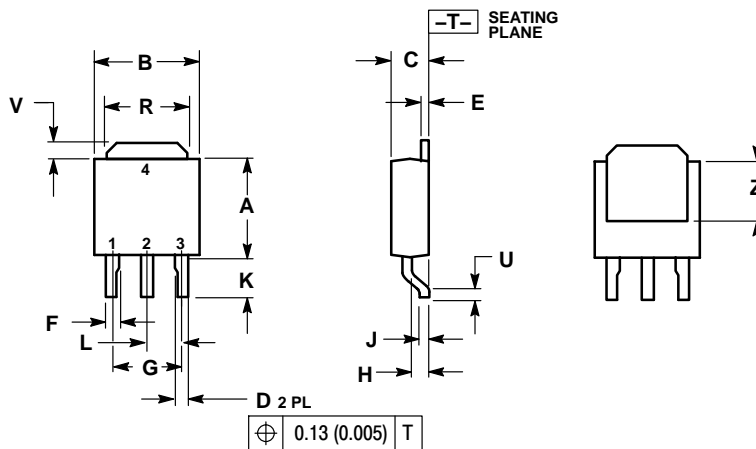

- NOTES:  
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES |       | MILLIMETERS |      |
|-----|--------|-------|-------------|------|
|     | MIN    | MAX   | MIN         | MAX  |
| A   | 0.235  | 0.245 | 5.97        | 6.22 |
| B   | 0.250  | 0.265 | 6.35        | 6.73 |
| C   | 0.086  | 0.094 | 2.19        | 2.38 |
| D   | 0.027  | 0.035 | 0.69        | 0.88 |
| E   | 0.018  | 0.023 | 0.46        | 0.58 |
| F   | 0.037  | 0.045 | 0.94        | 1.14 |
| G   | 0.180  | BSC   | 4.58        | BSC  |
| H   | 0.034  | 0.040 | 0.87        | 1.01 |
| J   | 0.018  | 0.023 | 0.46        | 0.58 |
| K   | 0.102  | 0.114 | 2.60        | 2.89 |
| L   | 0.090  | BSC   | 2.29        | BSC  |
| R   | 0.180  | 0.215 | 4.57        | 5.45 |
| U   | 0.020  | ---   | 0.51        | ---  |
| V   | 0.035  | 0.050 | 0.89        | 1.27 |
| Z   | 0.155  | ---   | 3.93        | ---  |

- STYLE 1:  
PIN 1. BASE  
2. COLLECTOR  
3. EMITTER  
4. COLLECTOR

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marketing.pdf](http://www.onsemi.com/site/pdf/Patent-Marketing.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION


**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>  
For additional information, please contact your local Sales Representative

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View MJD45H11-1G on WIN SOURCE](#)

 [ON Semiconductor](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management