



**THE DATASHEET OF
30CTQ035STR**








30CTQ.../30CTQ...S /30CTQ...-1
SCHOTTKY RECTIFIER

Applications:


- Switching power supply
- Converters
- Free-Wheeling diodes
- Reverse battery protection

Features:

- 175°C T_J operation
- Center tap configuration
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- This is a Pb – Free Device
- All SMC parts are traceable to the wafer lot
- Additional testing can be offered upon request


| Case styles | | |
|---|---|---|
| 30CTQ...  TO-220AB | 30CTQ...S  D²PAK | 30CTQ...-1  TO-262 |

Mechanical Dimensions: In Inches / mm

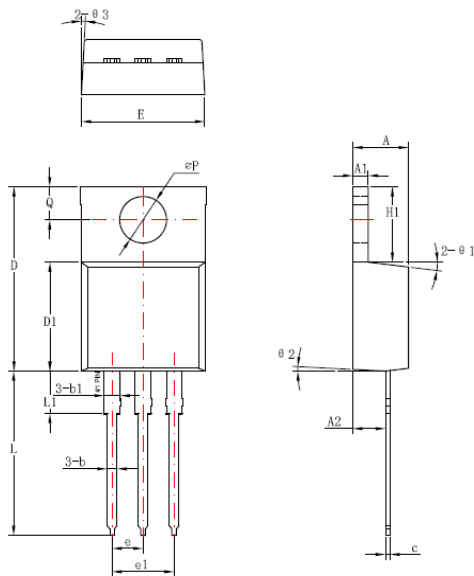


| Symbol | Dimensions in millimeters | | |
|--------|---------------------------|---------|-------|
| | Min | Typical | Max |
| A | 4.42 | 4.57 | 4.72 |
| A1 | 1.17 | 1.27 | 1.37 |
| A2 | 2.59 | 2.69 | 2.89 |
| b | 0.71 | 0.81 | 0.96 |
| b1 | | 1.27 | |
| c | 0.36 | 0.38 | 0.61 |
| D | 14.94 | 15.24 | 15.54 |
| D1 | 8.85 | 9.00 | 9.15 |
| E | 10.01 | 10.16 | 10.31 |
| e | | 2.54 | |
| e1 | | 5.06 | |
| H1 | 6.04 | 6.24 | 6.44 |
| L | 12.7 | 13.56 | 13.78 |
| L1 | | 3.5 | |
| ΦP | 3.74 | 3.84 | 4.04 |
| Q | 2.54 | 2.74 | 2.94 |
| θ1 | | 7° | |
| θ2 | | 3° | |
| θ3 | | 4° | |

TO-220AB

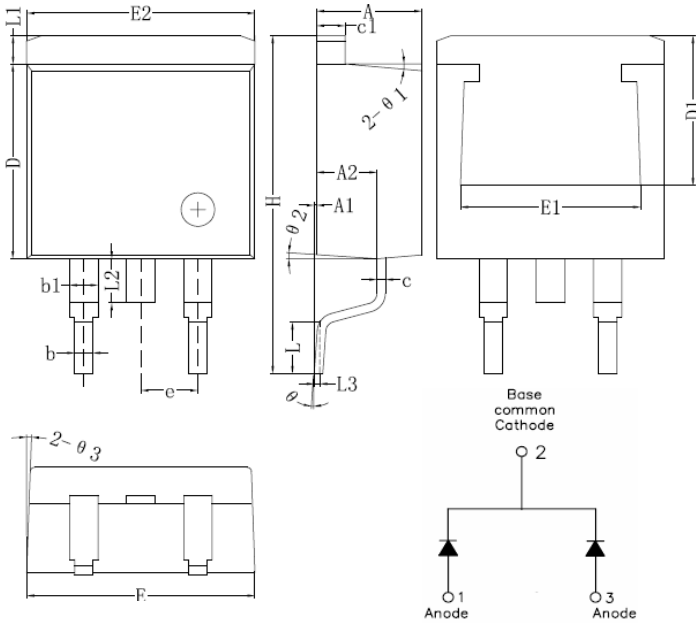


D²PAK

| Symbol | Dimensions in millimeters | | |
|--------|---------------------------|---------|-------|
| | Min. | Typical | Max. |
| A | 4.55 | 4.70 | 4.85 |
| A1 | 0 | 0.10 | 0.25 |
| A2 | 2.59 | 2.69 | 2.89 |
| b | 0.71 | 0.81 | 0.96 |
| b1 | | 1.27 | |
| c | 0.36 | 0.38 | 0.61 |
| c1 | 1.17 | 1.27 | 1.37 |
| D | 8.55 | 8.70 | 8.85 |
| D1 | 6.40 | | |
| E | 10.01 | 10.16 | 10.31 |
| E1 | 7.6 | | |
| E2 | 9.98 | 10.08 | 10.18 |
| e | | 2.54 | |
| H | 14.6 | 15.1 | 15.6 |
| L | 2.00 | 2.30 | 2.70 |
| L1 | 1.17 | 1.27 | 1.40 |
| L2 | | | 2.20 |
| L3 | | 0.25BSC | |
| e | 0 | - | 8° |
| e1 | | 5° | |
| e2 | | 4° | |
| e3 | | 4° | |

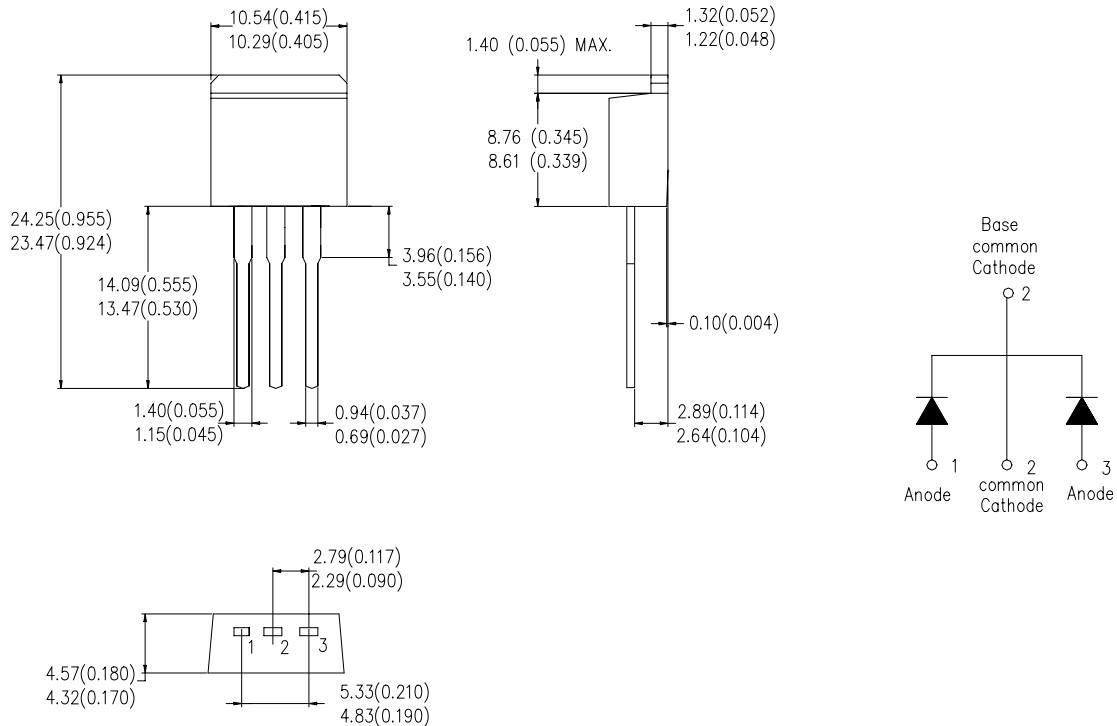


TO-262

Marking Diagram:

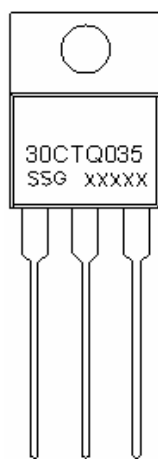

30CTQ035

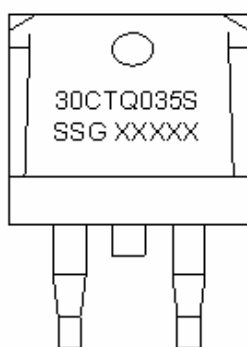

30CTQ035S

Where XXXXX is YYWWL

30CTQ035 =Part Name
SSG = SSG
YY = Year
WW = Week
L = Lot Number

Cautions: Molding resin
Epoxy resin UL:94V-0

Ordering Information:

| Device | Package | Shipping |
|-----------|---------------------------------|---------------|
| 30CTQ... | TO-220AB (Pb-Free) | 50pcs / tube |
| 30CTQ...S | D ² PAK (Pb-Free) | 800pcs / reel |

For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification.

Maximum Ratings:

| Characteristics | Symbol | Condition | Max. | Units |
|--|-------------|---|--|-------|
| Peak Inverse Voltage | V_{RWM} | - | 35(30CTQ035) 40(30CTQ040) 45(30CTQ045) | V |
| Max. Average Forward | $I_{F(AV)}$ | 50% duty cycle @ $T_C = 127^\circ\text{C}$, rectangular wave form | 30 | A |
| Max. Peak One Cycle Non-Repetitive Surge Current (per leg) | I_{FSM} | 8.3 ms, half Sine pulse | 318 | A |

Electrical Characteristics:

| Characteristics | Symbol | Condition | Max. | Units |
|---------------------------------------|-----------------|---|--------|-------|
| Max. Forward Voltage Drop (per leg) * | V _{F1} | @ 15A, Pulse, T _J = 25 °C | 0.62 | V |
| | V _{F2} | @ 15A, Pulse, T _J = 125 °C | 0.56 | V |
| Max. Reverse Current (per leg) * | I _{R1} | @V _R = rated V _R T _J = 25 °C | 1.0 | mA |
| | I _{R2} | @V _R = rated V _R T _J = 100°C | 15 | mA |
| Max. Junction Capacitance (per leg) | C _T | @V _R = 5V, T _C = 25 °C f _{SIG} = 1MHz | 900 | pF |
| Max. Voltage Rate of Change | dv/dt | - | 10,000 | V/μs |


* Pulse Width < 300μs, Duty Cycle <2%

Thermal-Mechanical Specifications:


| Characteristics | Symbol | Condition | Specification | Units |
|---|--|--------------|---------------|-------|
| Max. Junction Temperature | T _J | - | -55 to +175 | °C |
| Max. Storage Temperature | T _{stg} | - | -55 to +175 | °C |
| Maximum Thermal Resistance Junction to Case | R _{θJC} | DC operation | 3.25 | °C/W |
| Approximate Weight | wt | - | 2/1.85 | g |
| Case Style | TO-220AB D ² PAK TO-262(Suffix"-1" for TO-262;"S" for D ² PAK) | | | |




Typical Forward Characteristics

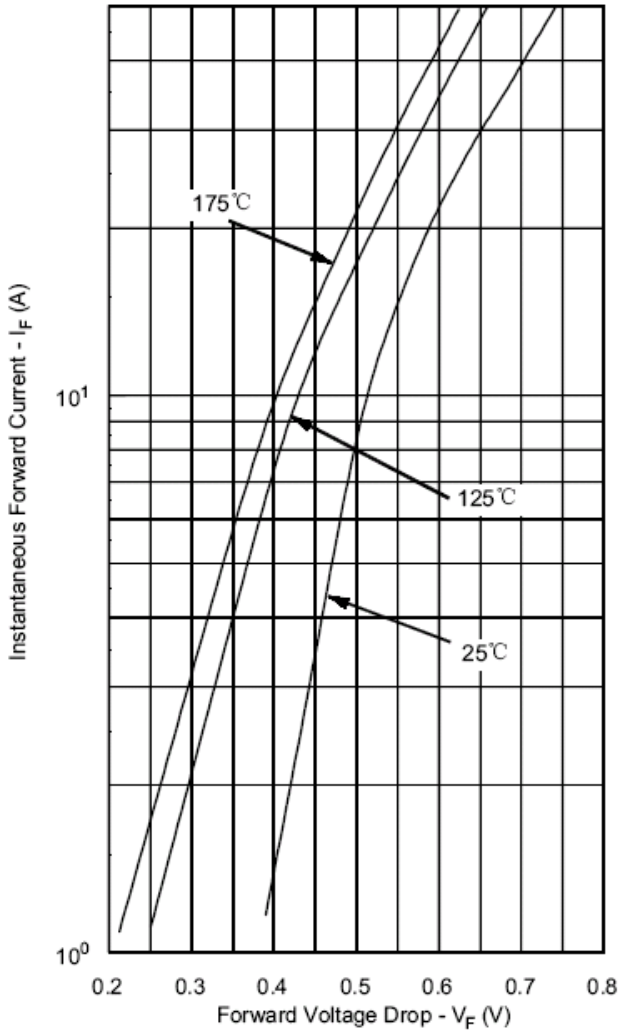

Typical Reverse Characteristics

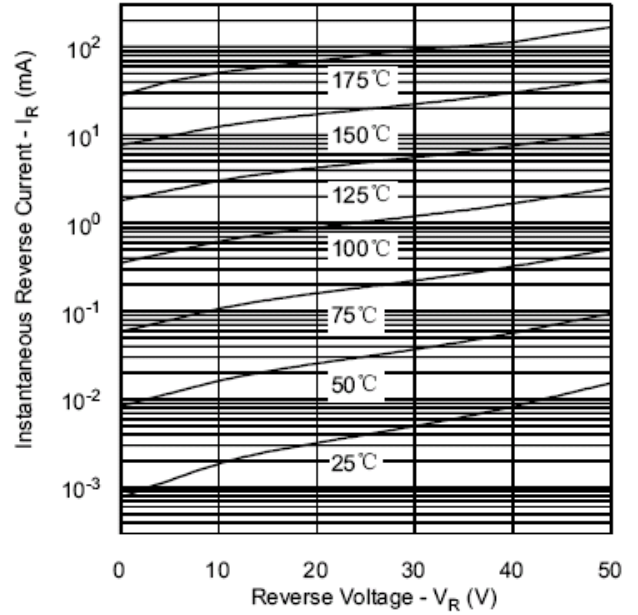

Typical Junction Capacitance

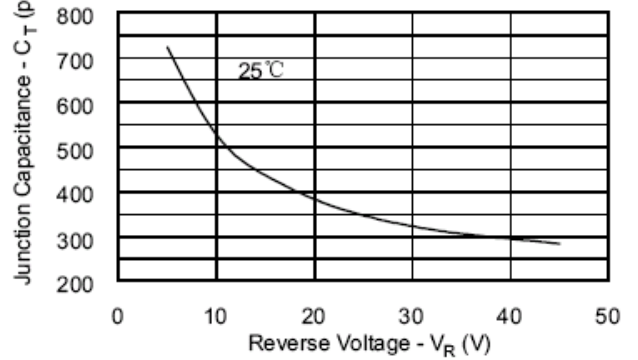

DISCLAIMER:

1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the SMC - Sangdest Microelectronics (Nanjing) Co., Ltd sales department for the latest version of the datasheet(s).

2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.

3- In no event shall SMC - Sangdest Microelectronics (Nanjing) Co., Ltd be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). SMC - Sangdest Microelectronics (Nanjing) Co., Ltd assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.

4- In no event shall SMC - Sangdest Microelectronics (Nanjing) Co., Ltd be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.

5- No license is granted by the datasheet(s) under any patents or other rights of any third party or SMC - Sangdest Microelectronics (Nanjing) Co., Ltd.

6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of SMC - Sangdest Microelectronics (Nanjing) Co., Ltd.

7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations..

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 30CTQ035STR](#) on WIN SOURCE
-  [SMC Diode Solutions](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management