



**THE DATASHEET OF
NTZD3155CT2G**



NTZD3155C

MOSFET – Small Signal, Complementary with ESD Protection, SOT-563

20 V, 540 mA / -430 mA



ON Semiconductor®

www.onsemi.com

Features

- Leading Trench Technology for Low $R_{DS(on)}$ Performance
- High Efficiency System Performance
- Low Threshold Voltage
- ESD Protected Gate
- Small Footprint 1.6 x 1.6 mm
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

Applications

- DC-DC Conversion Circuits
- Load/Power Switching with Level Shift
- Single or Dual Cell Li-Ion Battery Operated Systems
- High Speed Circuits
- Cell Phones, MP3s, Digital Cameras, and PDAs

MAXIMUM RATINGS ($T_J = 25^\circ\text{C}$ unless otherwise specified)



| Parameter | | | Symbol | Value | Unit |
|---|--------------|--------------------------|----------------|--------------|------------------|
| Drain-to-Source Voltage | | | V_{DSS} | 20 | V |
| Gate-to-Source Voltage | | | V_{GS} | ± 6 | V |
| N-Channel Continuous Drain Current (Note 1) | Steady State | $T_A = 25^\circ\text{C}$ | I_D | 540 | mA |
| | | $T_A = 85^\circ\text{C}$ | | 390 | |
| P-Channel Continuous Drain Current (Note 1) | Steady State | $T_A = 25^\circ\text{C}$ | | -430 | |
| | | $T_A = 85^\circ\text{C}$ | | -310 | |
| Power Dissipation (Note 1) | Steady State | $T_A = 25^\circ\text{C}$ | P_D | 250 | mW |
| | | | | $t \leq 5$ s | |
| Pulsed Drain Current | N-Channel | $t_p = 10$ μs | I_{DM} | 1500 | mA |
| | P-Channel | | | -750 | |
| Operating Junction and Storage Temperature | | | T_J, T_{STG} | -55 to 150 | $^\circ\text{C}$ |
| Source Current (Body Diode) | | | I_S | 350 | mA |
| Lead Temperature for Soldering Purposes (1/8" from case for 10 s) | | | T_L | 260 | $^\circ\text{C}$ |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Surface-mounted on FR4 board using 1 in sq. pad size (Cu area = 1.127 in sq [1 oz] including traces).

| $V_{(BR)DSS}$ | $R_{DS(on)}$ Typ | I_D Max (Note 1) |
|--------------------|-----------------------|--------------------|
| N-Channel 20 V | 0.4 Ω @ 4.5 V | 540 mA |
| | 0.5 Ω @ 2.5 V | |
| | 0.7 Ω @ 1.8 V | |
| P-Channel -20 V | 0.5 Ω @ -4.5 V | -430 mA |
| | 0.6 Ω @ -2.5 V | |
| | 1.0 Ω @ -1.8 V | |

PINOUT: SOT-563

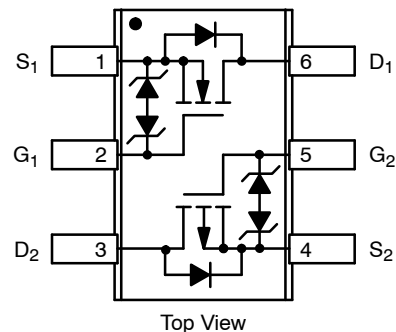

SOT-563-6
CASE 463A

MARKING DIAGRAM



TW = Specific Device Code
M = Date Code
▪ = Pb-Free Package

(Note: Microdot may be in either location)

ORDERING INFORMATION

| Device | Package | Shipping† |
|--------------|----------------------|--------------------|
| NTZD3155CT1G | SOT-563 (Pb-Free) | 4000 / Tape & Reel |
| NTZD3155CT2G | | |
| NTZD3155CT5G | | 8000 / Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

NTZD3155C

Thermal Resistance Ratings

| Parameter | Symbol | Max | Unit |
|---|-----------------|-----|---------------|
| Junction-to-Ambient – Steady State (Note 2) | $R_{\theta JA}$ | 500 | $^{\circ}C/W$ |
| Junction-to-Ambient – $t = 5$ s (Note 2) | | 447 | |

2. Surface mounted on FR4 board using 1 in sq pad size (Cu area = 1.127 in sq [1 oz] including traces).

ELECTRICAL CHARACTERISTICS ($T_J = 25^{\circ}C$ unless otherwise specified)

| Parameter | Symbol | N/P | Test Condition | Min | Typ | Max | Unit |
|---|-------------------|-----|--------------------------------------|----------------------|-----|-----------|----------------|
| OFF CHARACTERISTICS | | | | | | | |
| Drain-to-Source Breakdown Voltage | $V_{(BR)DSS}$ | N | $V_{GS} = 0$ V | $I_D = 250$ μ A | 20 | | V |
| | | P | | $I_D = -250$ μ A | -20 | | |
| Drain-to-Source Breakdown Voltage Temperature Coefficient | $V_{(BR)DSS}/T_J$ | | | | 18 | | $mV/^{\circ}C$ |
| Zero Gate Voltage Drain Current | I_{DSS} | N | $V_{GS} = 0$ V, $V_{DS} = 16$ V | $T_J = 25^{\circ}C$ | | 1.0 | μ A |
| | | P | $V_{GS} = 0$ V, $V_{DS} = -16$ V | | | -1.0 | |
| | | N | $V_{GS} = 0$ V, $V_{DS} = 16$ V | $T_J = 125^{\circ}C$ | | 2.0 | μ A |
| | | P | $V_{GS} = 0$ V, $V_{DS} = -16$ V | | | -5.0 | |
| Gate-to-Source Leakage Current | I_{GSS} | P | $V_{DS} = 0$ V, $V_{GS} = \pm 4.5$ V | | | ± 2.0 | μ A |
| | | N | | | | ± 5.0 | |

ON CHARACTERISTICS (Note 3)

| | | | | | | | | |
|--|------------------|---|------------------------------------|----------------------|-------|------|-----------------|---|
| Gate Threshold Voltage | $V_{GS(TH)}$ | N | $V_{GS} = V_{DS}$ | $I_D = 250$ μ A | 0.45 | | 1.0 | V |
| | | P | | $I_D = -250$ μ A | -0.45 | | -1.0 | |
| Gate Threshold Temperature Coefficient | $V_{GS(TH)}/T_J$ | | | | -1.9 | | $-mV/^{\circ}C$ | |
| Drain-to-Source On Resistance | $R_{DS(on)}$ | N | $V_{GS} = 4.5$ V, $I_D = 540$ mA | | 0.4 | 0.55 | Ω | |
| | | P | $V_{GS} = -4.5$ V, $I_D = -430$ mA | | 0.5 | 0.9 | | |
| | | N | $V_{GS} = 2.5$ V, $I_D = 500$ mA | | 0.5 | 0.7 | | |
| | | P | $V_{GS} = -2.5$ V, $I_D = -300$ mA | | 0.6 | 1.2 | | |
| | | N | $V_{GS} = 1.8$ V, $I_D = 350$ mA | | 0.7 | 0.9 | | |
| | | P | $V_{GS} = -1.8$ V, $I_D = -150$ mA | | 1.0 | 2.0 | | |
| Forward Transconductance | g_{FS} | N | $V_{DS} = 10$ V, $I_D = 540$ mA | | 1.0 | | S | |
| | | P | $V_{DS} = -10$ V, $I_D = -430$ mA | | 1.0 | | | |

CHARGES, CAPACITANCES AND GATE RESISTANCE

| | | | | | | | |
|------------------------------|-----------|---|---|--|-----|-----|------|
| Input Capacitance | C_{ISS} | N | $f = 1$ MHz, $V_{GS} = 0$ V $V_{DS} = 16$ V | | 80 | 150 | pF |
| Output Capacitance | C_{OSS} | | | | 13 | 25 | |
| Reverse Transfer Capacitance | C_{RSS} | | | | 10 | 20 | |
| Input Capacitance | C_{ISS} | P | $f = 1$ MHz, $V_{GS} = 0$ V $V_{DS} = -16$ V | | 105 | 175 | |
| Output Capacitance | C_{OSS} | | | | 15 | 30 | |
| Reverse Transfer Capacitance | C_{RSS} | | | | 10 | 20 | |

3. Pulse Test: pulse width ≤ 300 μ s, duty cycle $\leq 2\%$

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

NTZD3155C

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise specified)

| Parameter | Symbol | N/P | Test Condition | Min | Typ | Max | Unit |
|-----------|--------|-----|----------------|-----|-----|-----|------|
|-----------|--------|-----|----------------|-----|-----|-----|------|

CHARGES, CAPACITANCES AND GATE RESISTANCE

| | | | | | | | |
|-----------------------|---------------------|---|--|--|------|-----|----|
| Total Gate Charge | Q _{G(TOT)} | N | V _{GS} = 4.5 V, V _{DS} = -10 V; I _D = 540 mA | | 1.5 | 2.5 | nC |
| Threshold Gate Charge | Q _{G(TH)} | | | | 0.1 | | |
| Gate-to-Source Charge | Q _{GS} | | | | 0.2 | | |
| Gate-to-Drain Charge | Q _{GD} | | | | 0.35 | | |
| Total Gate Charge | Q _{G(TOT)} | P | V _{GS} = -4.5 V, V _{DS} = 10 V; I _D = -380 mA | | 1.7 | 2.5 | |
| Threshold Gate Charge | Q _{G(TH)} | | | | 0.1 | | |
| Gate-to-Source Charge | Q _{GS} | | | | 0.3 | | |
| Gate-to-Drain Charge | Q _{GD} | | | | 0.4 | | |

SWITCHING CHARACTERISTICS (V_{GS} = V) (Note 4)

| | | | | | | | |
|---------------------|---------------------|---|--|--|-----|--|----|
| Turn-On Delay Time | t _{d(ON)} | N | V _{GS} = 4.5 V, V _{DD} = -10 V, I _D = 540 mA, R _G = 10 Ω | | 6.0 | | ns |
| Rise Time | t _r | | | | 4.0 | | |
| Turn-Off Delay Time | t _{d(OFF)} | | | | 16 | | |
| Fall Time | t _f | | | | 8.0 | | |
| Turn-On Delay Time | t _{d(ON)} | P | V _{GS} = -4.5 V, V _{DD} = 10 V, I _D = -215 mA, R _G = 10 Ω | | 10 | | |
| Rise Time | t _r | | | | 12 | | |
| Turn-Off Delay Time | t _{d(OFF)} | | | | 35 | | |
| Fall Time | t _f | | | | 19 | | |

Drain-Source Diode Characteristics

| | | | | | | | | |
|-----------------------|-----------------|---|--|--------------------------|--|------|------|----|
| Forward Diode Voltage | V _{SD} | N | V _{GS} = 0 V, T _J = 25°C | I _S = 350 mA | | 0.7 | 1.2 | V |
| | | P | | I _S = -350 mA | | -0.8 | -1.2 | |
| Reverse Recovery Time | t _{RR} | N | V _{GS} = 0 V, dI _S /dt = 100 A/μs | I _S = 350 mA | | 6.5 | | ns |
| | | P | | I _S = -350 mA | | 13 | | |

4. Switching characteristics are independent of operating junction temperatures

NTZD3155C

N-CHANNEL TYPICAL PERFORMANCE CURVES ($T_J = 25^\circ\text{C}$ unless otherwise noted)

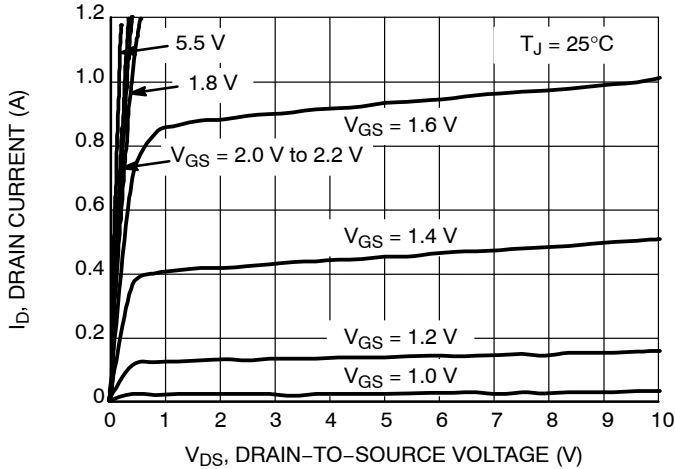


Figure 1. On-Region Characteristics

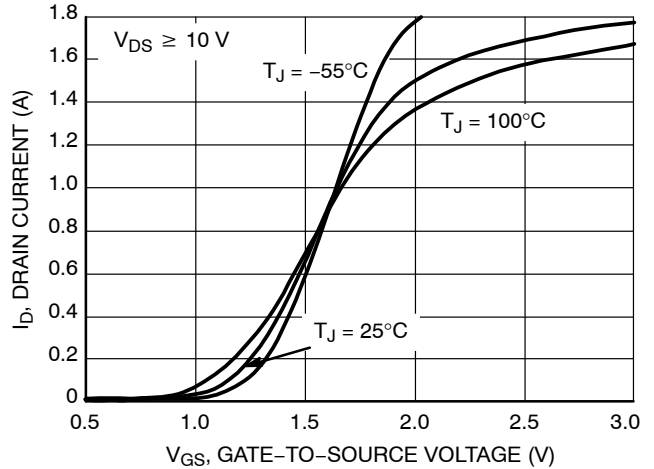


Figure 2. Transfer Characteristics

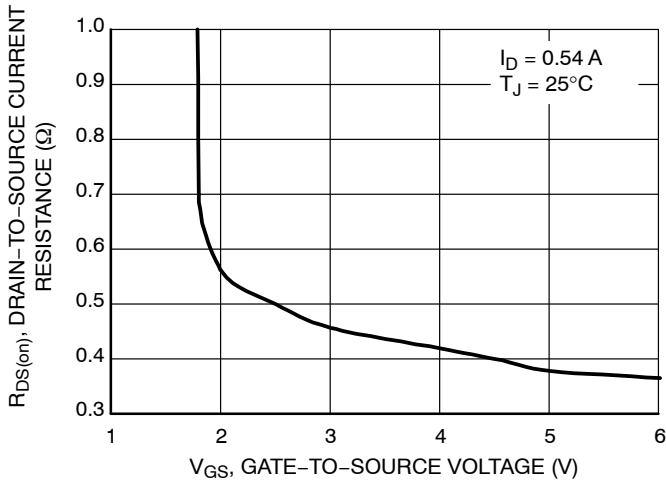


Figure 3. On-Resistance versus Gate-to-Source Voltage

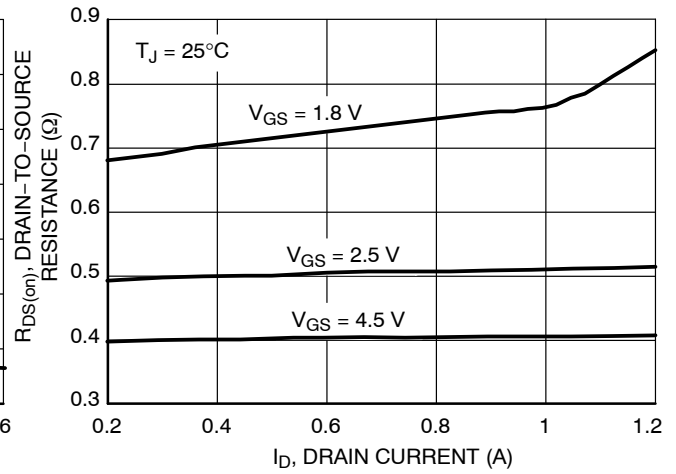


Figure 4. On-Resistance versus Drain Current and Gate Voltage

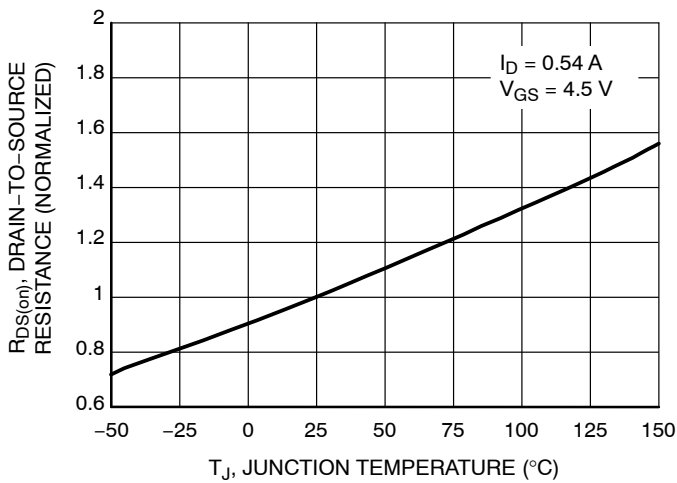


Figure 5. On-Resistance Variation with Temperature

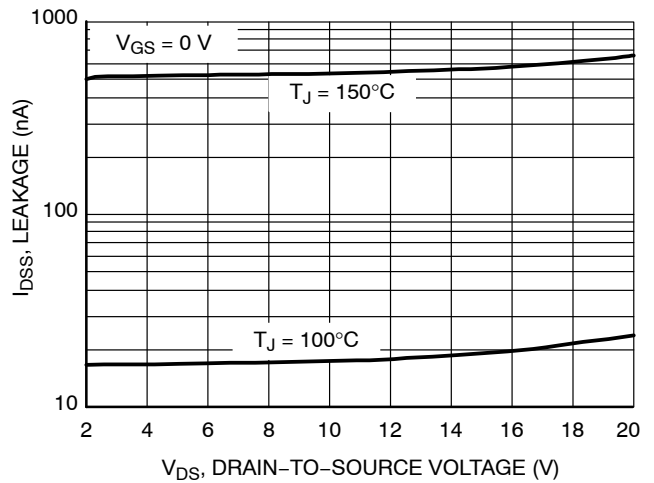


Figure 6. Drain-to-Source Leakage Current versus Voltage

NTZD3155C

N-CHANNEL TYPICAL PERFORMANCE CURVES ($T_J = 25^\circ\text{C}$ unless otherwise noted)

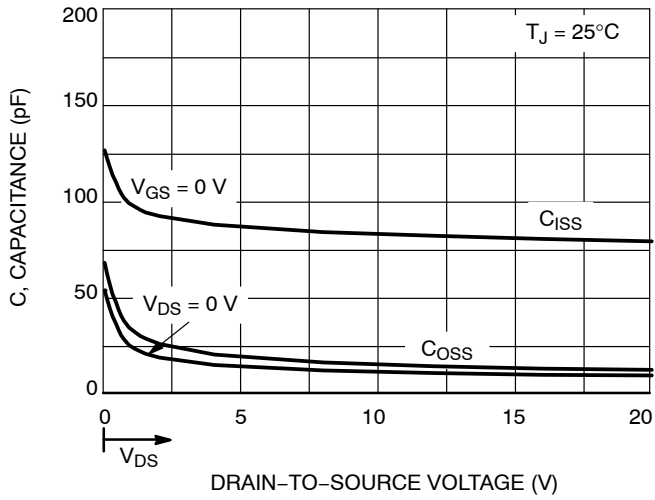


Figure 7. Capacitance Variation

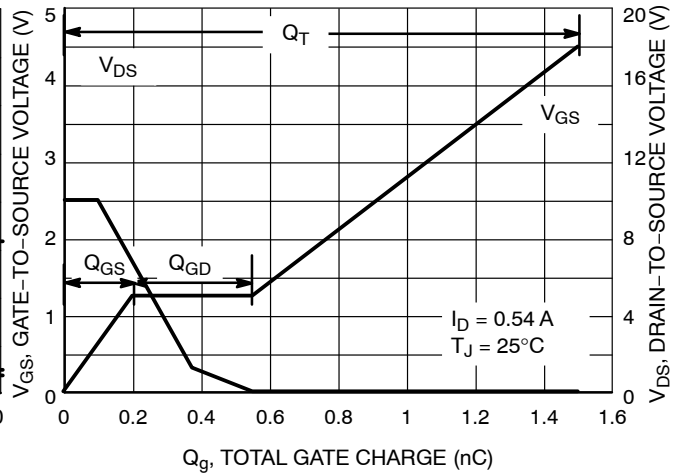


Figure 8. Gate-to-Source and Drain-to-Source Voltage versus Total Charge

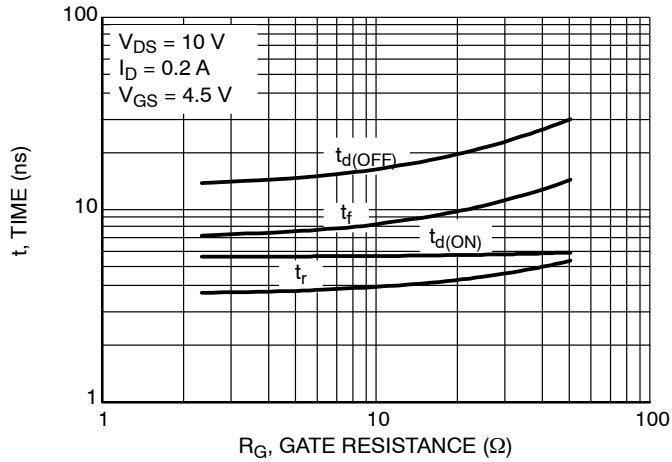


Figure 9. Resistive Switching Time Variation versus Gate Resistance

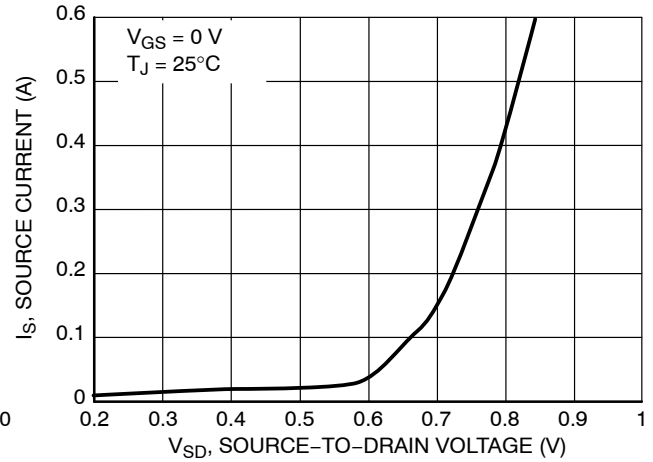


Figure 10. Diode Forward Voltage versus Current

NTZD3155C

P-CHANNEL TYPICAL PERFORMANCE CURVES ($T_J = 25^\circ\text{C}$ unless otherwise noted)

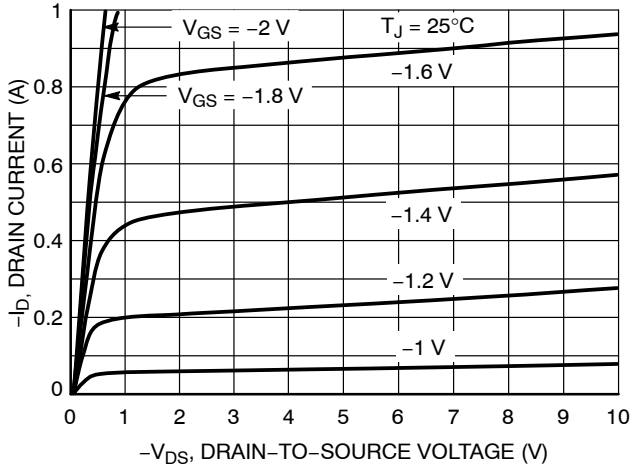


Figure 1. On-Region Characteristics

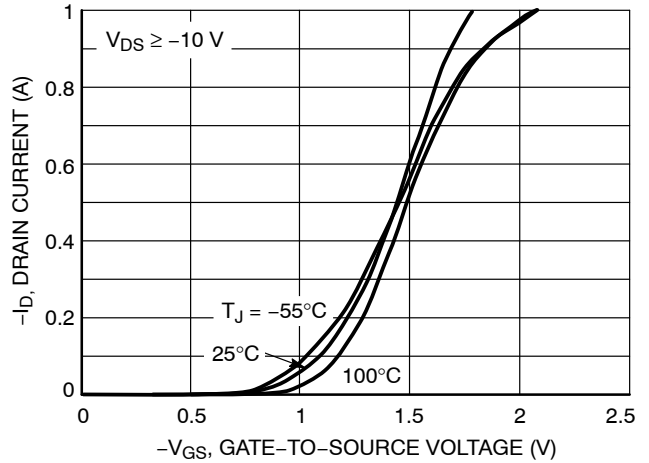


Figure 2. Transfer Characteristics

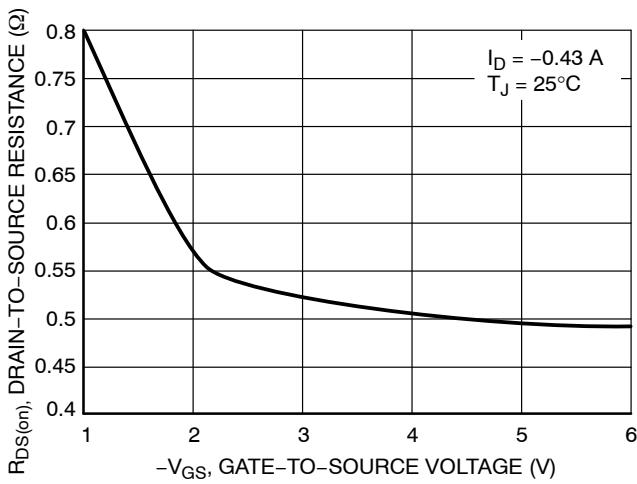


Figure 3. On-Resistance vs. Gate-to-Source Voltage

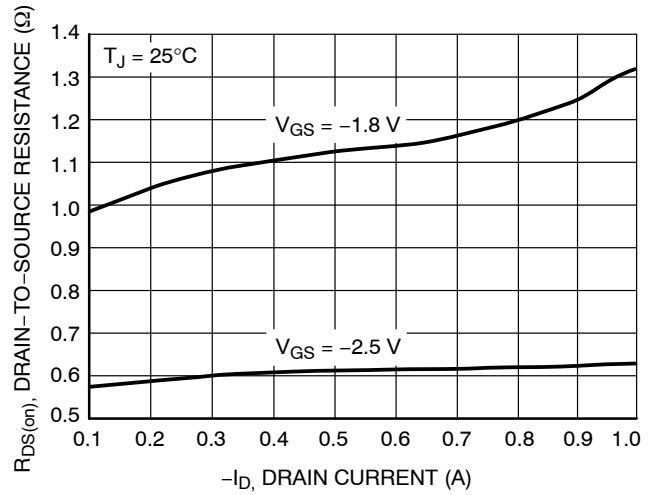


Figure 4. On-Resistance vs. Drain Current and Gate Voltage

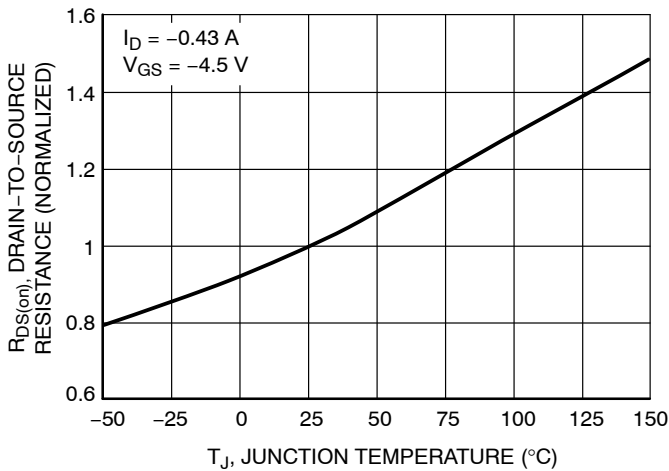


Figure 5. On-Resistance Variation with Temperature

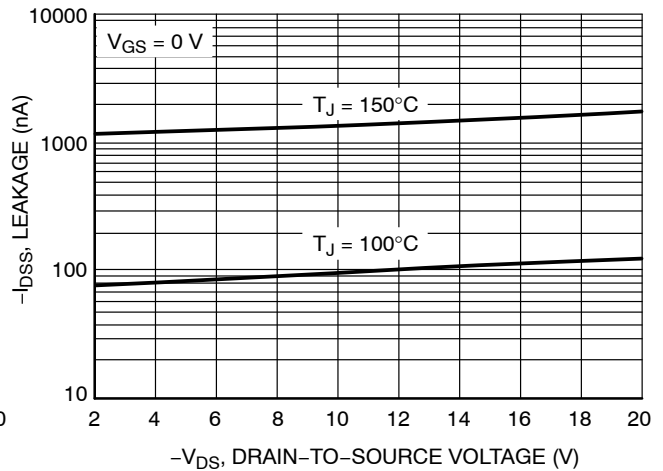


Figure 6. Drain-to-Source Leakage Current vs. Voltage

NTZD3155C

P-CHANNEL TYPICAL PERFORMANCE CURVES ($T_J = 25^\circ\text{C}$ unless otherwise noted)

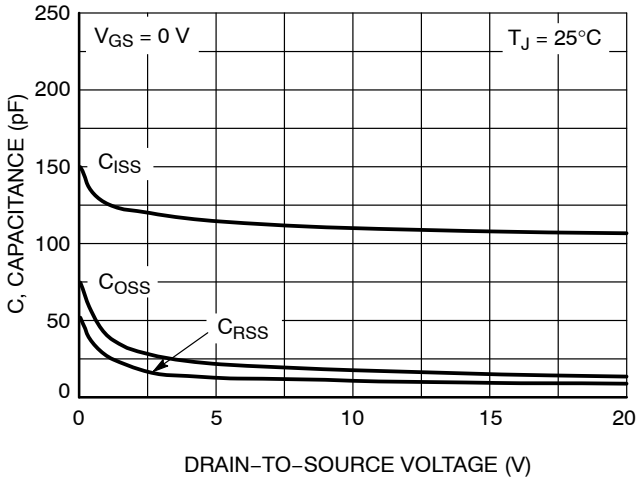


Figure 7. Capacitance Variation

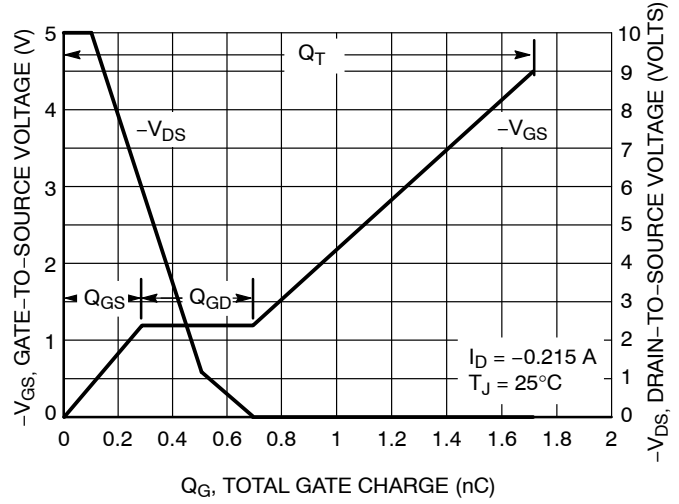


Figure 8. Gate-to-Source and Drain-to-Source Voltage vs. Total Charge

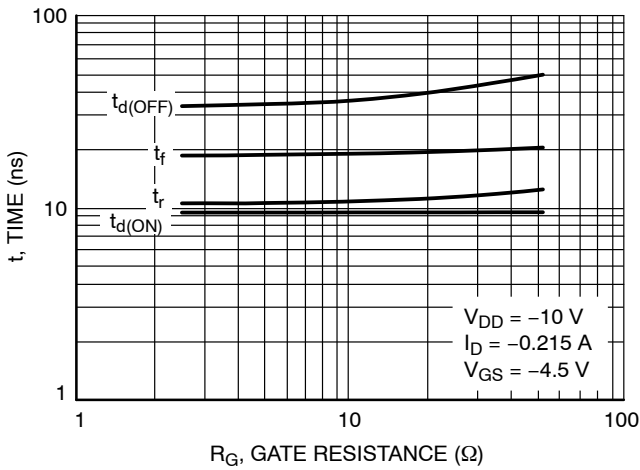


Figure 9. Resistive Switching Time Variation vs. Gate Resistance


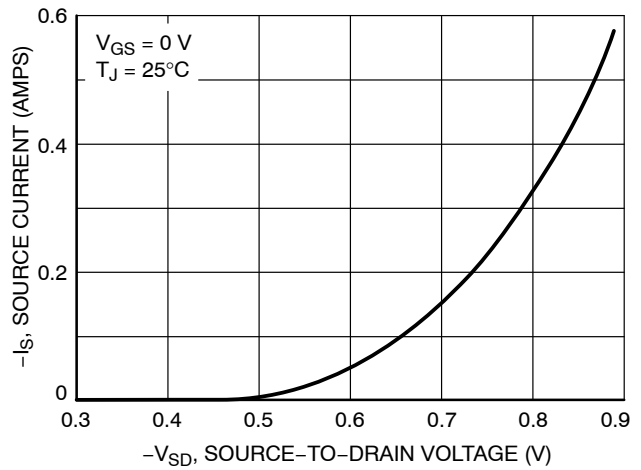


Figure 10. Diode Forward Voltage vs. Current

NTZD3155C

PACKAGE DIMENSIONS

SOT-563, 6 LEAD CASE 463A ISSUE F

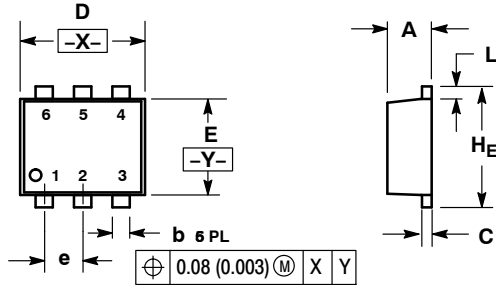


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

| DIM | MILLIMETERS | | | INCHES | | |
|----------------|-------------|------|------|----------|-------|-------|
| | MIN | NOM | MAX | MIN | NOM | MAX |
| A | 0.50 | 0.55 | 0.60 | 0.020 | 0.021 | 0.023 |
| b | 0.17 | 0.22 | 0.27 | 0.007 | 0.009 | 0.011 |
| C | 0.08 | 0.12 | 0.18 | 0.003 | 0.005 | 0.007 |
| D | 1.50 | 1.60 | 1.70 | 0.059 | 0.062 | 0.066 |
| E | 1.10 | 1.20 | 1.30 | 0.043 | 0.047 | 0.051 |
| e | 0.5 BSC | | | 0.02 BSC | | |
| L | 0.10 | 0.20 | 0.30 | 0.004 | 0.008 | 0.012 |
| H _F | 1.50 | 1.60 | 1.70 | 0.059 | 0.062 | 0.066 |

SOLDERING FOOTPRINT*

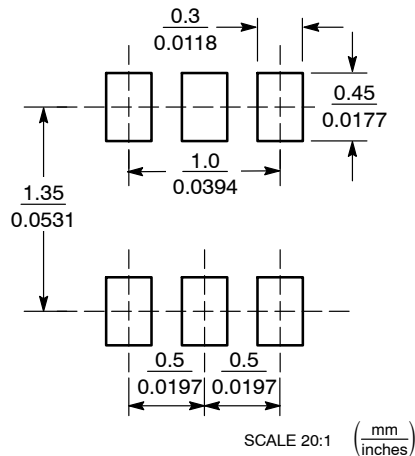

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and the are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com
Order Literature: <http://www.onsemi.com/orderlit>
For additional information, please contact your local Sales Representative

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View NTZD3155CT2G on WIN SOURCE](#)

 [ON Semiconductor](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management